

P-05-245

Forsmark site investigation

Hydro Monitoring Program

Report for August 2004 – July 2005

Göran Nyberg, Eva Wass
GEOSIGMA

December 2005

Svensk Kärnbränslehantering AB
Swedish Nuclear Fuel
and Waste Management Co
Box 5864
SE-102 40 Stockholm Sweden
Tel 08-459 84 00
+46 8 459 84 00
Fax 08-661 57 19
+46 8 661 57 19



**Forsmark site investigation
Hydro Monitoring Program
Report for August 2004 – July 2005**

Göran Nyberg, Eva Wass
GEOSIGMA

December 2005

Keywords: AP PF 400-04-31, AP PF 400-04-120, Groundwater, Borehole, Instrumentation, Measurement methods, Monitoring, Forsmark.

This report concerns a study which was conducted for SKB. The conclusions and viewpoints presented in the report are those of the authors and do not necessarily coincide with those of the client.

A pdf version of this document can be downloaded from www.skb.se

Abstract

This document reports data obtained within the hydro monitoring program, which is one of the activities performed within the site investigation at Forsmark. The objective of the groundwater monitoring is to support the hydrogeological characterization of the area and to document the groundwater conditions before a possible excavation.

Data presented in this report are collected during the period of August 2004 until July 2005 and include groundwater levels in boreholes. Meteorological and hydrological data and some service parameters have also been collected within this activity, but are not presented in this report.

The data collecting system in HMS (Hydro Monitoring System) consists of one measurement station (computer) which communicates with and collects data from a number of dataloggers. The computer is connected to the SKB Ethernet LAN. All data are collected by means of different transducers connected to different types of data loggers: Minitroll, Mitec and Datataker.

In order to calibrate registrations from the data loggers, manual levelling of all sections is made, normally once every month. The logger data are converted to water levels using calibration constants. All collected data are quality checked once every three months. During this work, obviously erroneous data are removed and calibration constants are corrected so that the monitored data correspond with the manual levelling. At these occasions the status of the equipment is also controlled and service might be initiated.

Diagrams of groundwater levels for the period of August 2004 – July 2005 (one data point per section and twenty-four hours) are presented in Appendix 2. The original data are stored in the primary data base SICADA. The data in this data base may then be used for further analysis.

There are no nonconformities with respect to the activity plan or the method description.

Sammanfattning

Denna rapport redovisar data erhållna inom programmet för grundvattenmonitering vilket är en av aktiviteterna inom platsundersökningen i Forsmark. Syftet med grundvattenmoniteringen är att stödja den hydrogeologiska karakteriseringen av platsen och att dokumentera grundvattenförhållanden före en eventuell byggnation.

Data presenterade i rapporten är insamlade under perioden augusti 2004 till och med juli 2005 och består av grundvattennivå i borrhål. Inom ramen för platsundersökningarna insamlas även meteorologiska och yhydrologiska data, men dessa presenteras inte i denna rapport.

Datainsamlingssystemet i HMS (Hydro Monitoring System) består av en mätstation (dator) vilken kommunicerar med och samlar in data från ett antal dataloggrar. Datorn är förbunden med SKB:s nätverk. Alla data samlas in med hjälp av givare förbundna med olika typer av dataloggrar: Minitroll, Mitec och Datataker.

För att kunna kalibrera registreringarna från dataloggrarna utförs, vanligtvis en gång i månaden, manuell nivåregistrering (lodning) i alla sektioner. Loggerdata omvandlas till vattennivåer genom applicering av kalibreringskonstanter. Alla insamlade data kvalitetskontrolleras en gång i kvartalet. Under detta arbete tas uppenbart felaktiga data bort och kalibreringskonstanterna korrigeras så att automatiskt registrerade data överensstämmer med manuella nivåregistreringar. Vid dessa tillfällen kontrolleras utrustningens status och service kan initieras.

Diagram över grundvattennivåerna för perioden augusti 2004 – juli 2005 (en datapunkt per sektion och 24 timmar) visas i Appendix 2. Originaldata lagras i primärdatabasen SICADA. Data från denna databas kan användas för vidare analyser.

Aktiviteten har utförts i överensstämmelse med aktivitetsplanen och metodbeskrivningen.

Contents

1	Introduction	7
2	Objective and scope	9
3	Equipment	11
3.1	Description	11
3.2	Data collection	14
4	Execution	15
4.1	General	15
4.2	Field work	15
4.3	Data handling	15
4.3.1	Calibration method	15
4.3.2	Recording interval	15
4.4	Quality assurance	15
4.5	Nonconformities	16
5	Results	17
5.1	General	17
5.2	Groundwater levels	17
5.2.1	General comments	17
5.2.2	Comments on some of the diagrams	18
Appendix 1 Monitored sections		19
Appendix 2 Groundwater level		23

1 Introduction

This document reports data collected within the hydro monitoring program, which is one of the activities performed within the site investigation at Forsmark. The work was carried out in accordance with activity plans SKB AP PF 400-04-31 and SKB AP PF 400-04-120. In Table 1-1, controlling documents for this activity are listed. Both of the activity plans and the method descriptions are SKB's internal controlling documents. The site investigation internal report presents the results from the quality check performed once every three months, see Chapter 4.4.

Data presented in this report were collected during August 2004 – July 2005. Groundwater levels from boreholes and some surface water levels are included in the data set. Data from measurements at the runoff stations are presented in a separate report.

The HMS (Hydro Monitoring System) is used to collect and store all data.

Table 1-1. Controlling documents.

Activity Plans	Number	Version
Platsundersökning i Forsmark – Moniteringsprogram för hydrogeologi, hydrologi och meteorologi 2004	AP PF 400-04-31	1.0
Platsundersökning i Forsmark – Moniteringsprogram för hydrogeologi, hydrologi och meteorologi 2005	AP PF 400-04-120	1.0
Method Descriptions	Number	Version
Metodbeskrivning för grundvattenmonitering vid SKB:s platsundersökningar	SKB MD 360.002	1.0
Site investigation Internal Report (in Swedish)	Number	
Platsundersökning i Forsmark – Kvalitetskontroll av yt- och grundvattenmonitering Period: augusti – november 2004	PIR-04-22	
Platsundersökning i Forsmark – Kvalitetskontroll av yt- och grundvattenmonitering Period: november 2004 – januari 2005	PIR-05-02	
Platsundersökning i Forsmark – Kvalitetskontroll av yt- och grundvattenmonitering Period: februari – maj 2005	PIR-05-08	
Platsundersökning i Forsmark – Kvalitetskontroll av yt- och grundvattenmonitering Period: maj – augusti 2005	PIR-05-31	

2 Objective and scope

The objective of the part of the hydro monitoring program presented in this report is to determine baseline conditions of the natural variations of the groundwater levels prior to the potential excavation for a nuclear waste repository and to support the hydro-geological site characterisation.

Data collected within this activity are:

- groundwater level in boreholes (including monitoring wells in soil).
- water level, water temperature and electrical conductivity of surface waters measured in flumes at runoff stations, although not presented in this report.
- meteorological data from SMHI (Swedish Meteorological and Hydrological Institute), although not presented in this report.

There are also some parameters that are used for monitoring the hardware function and the environment in which the hardware is used. However, these are not reported herein.

The following numbers of boreholes, monitoring wells in soil and runoff stations were included in the Forsmark monitoring system at the end of July 2005:

- 10 core-drilled boreholes
- 20 percussion-drilled boreholes
- 46 monitoring wells in soil
- 4 runoff stations

The locations of the boreholes and the runoff stations are shown in Figure 2-1.

Some of the objects denominated “monitoring wells in soil” are, in fact, not wells, but surface water level gauges. These are SFM0038, SFM0039, SFM0040, SFM0041, SFM0042, SFM0043, SFM0064 and SFM0066. In the following, both types of level measurements are treated in the same way.

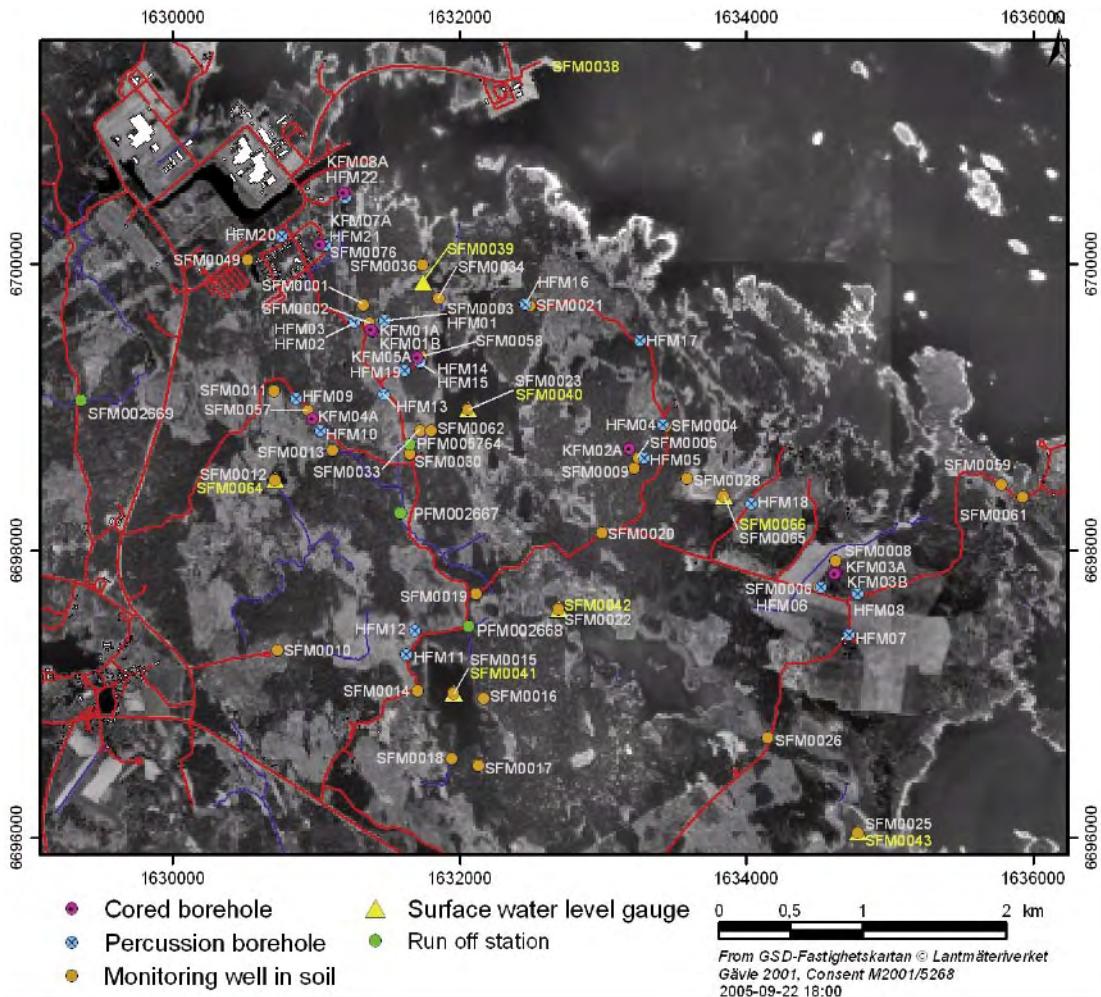


Figure 2-1. General overview of the Forsmark site investigation area with boreholes of different categories, surface water level gauges and runoff stations.

3 Equipment

3.1 Description

A drawing of the ground surface equipment used for percussion and core drilled boreholes is shown in Figure 3-1.

A drawing of the borehole equipment for permanent instrumentation in core drilled boreholes is presented in Figure 3-2. Permanent instrumentation in percussion drilled boreholes is shown in Figure 3-3.

In open boreholes, a transducer or data logger is submerged in the groundwater without any other equipment. Examples of open boreholes in Forsmark are monitoring wells in soil. No drawing is presented.

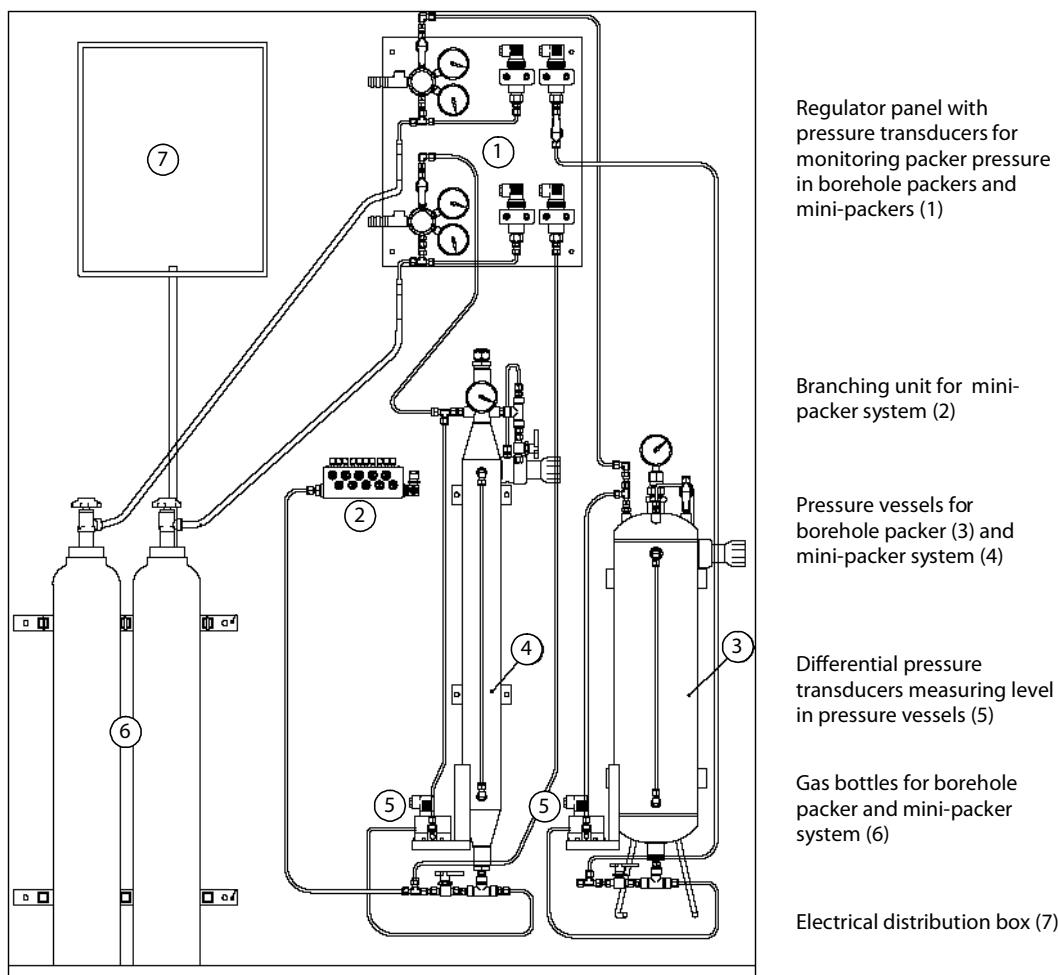


Figure 3-1. Example of ground surface equipment for percussion and core drilled boreholes.

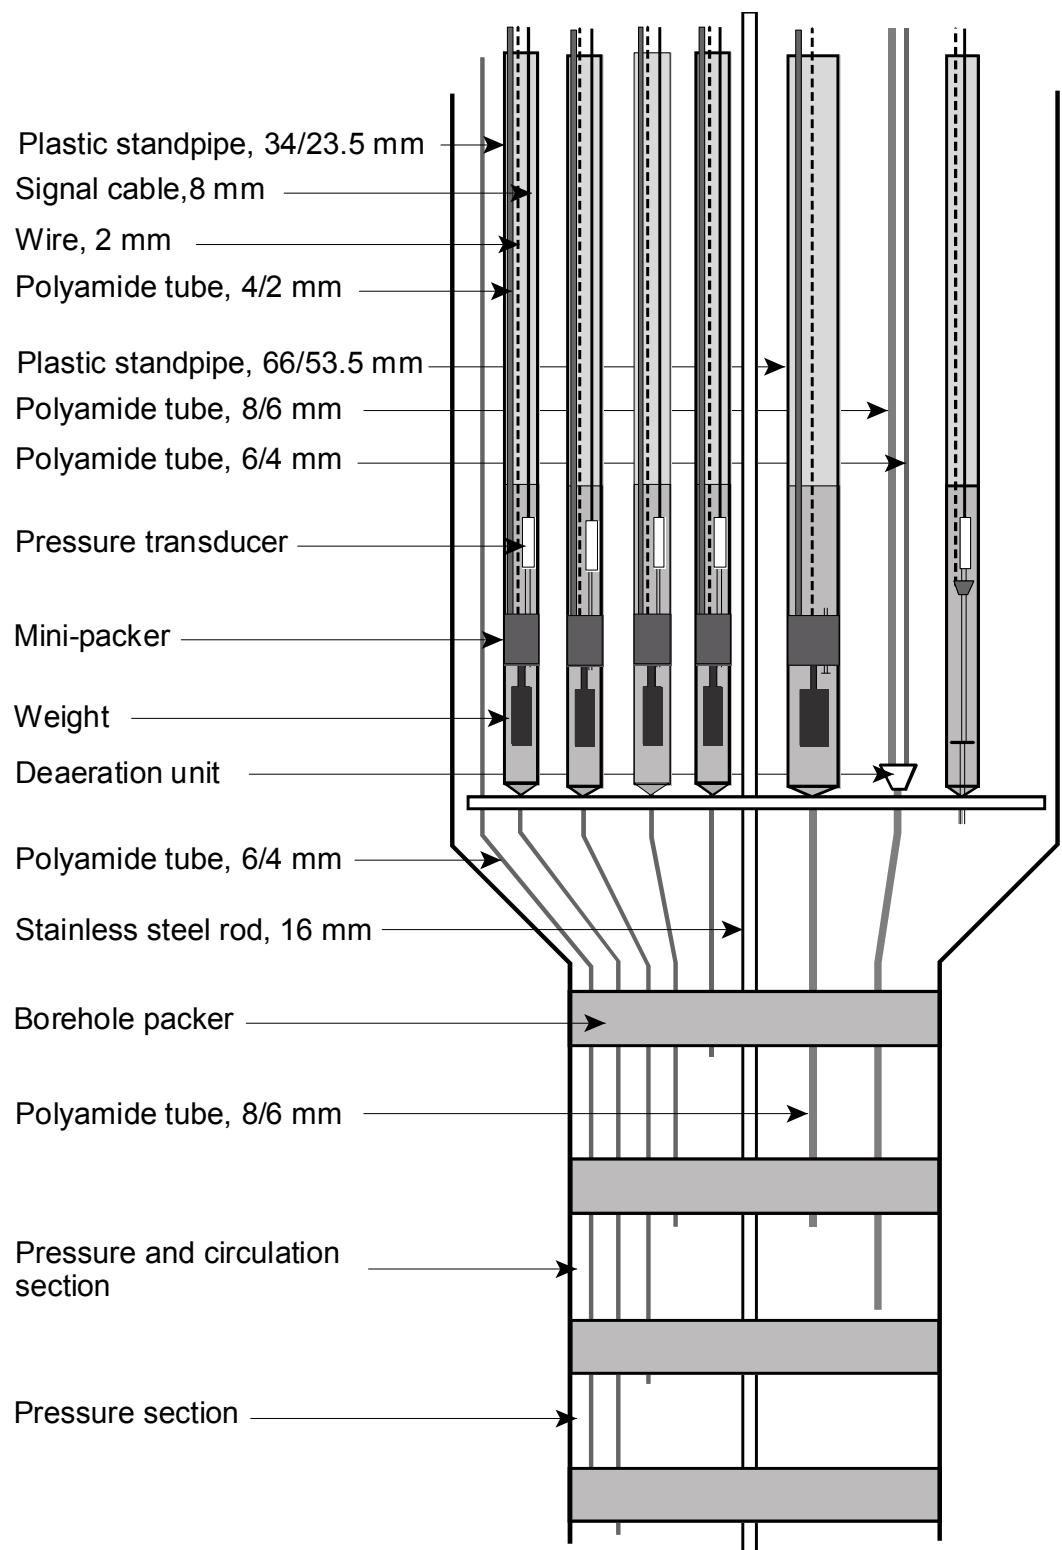


Figure 3-2. Example of permanent instrumentation in core drilled boreholes with a circulation section.

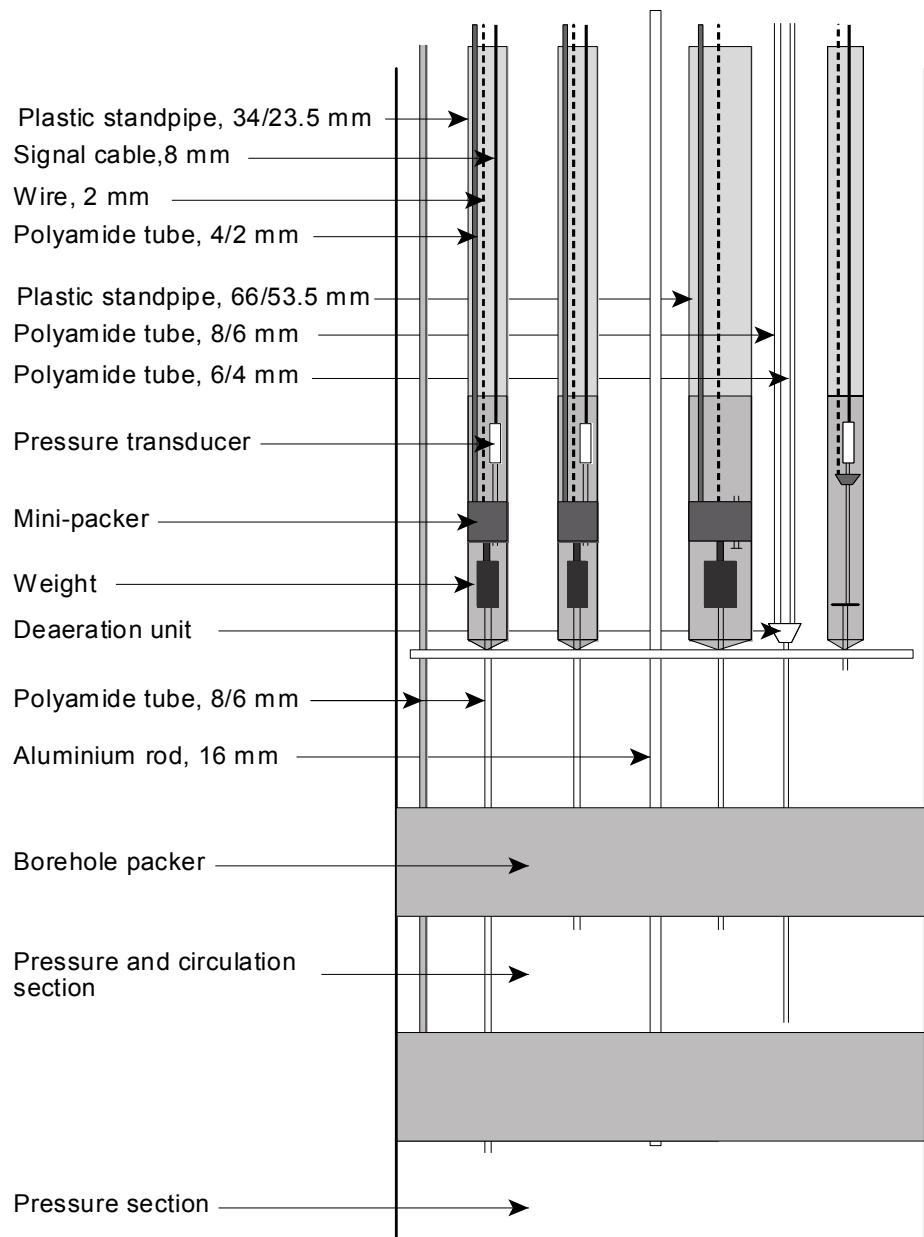


Figure 3-3. Example of permanent instrumentation in percussion drilled boreholes with a circulation section.

3.2 Data collection

The data collecting system, which is part of the Hydro Monitoring System (HMS), consists of one measurement station (computer), which collects data from a number of data sources, see Figure 3-4. The computer is connected to the SKB Ethernet LAN.

The on-line system is designed to be able to handle short interruptions in the communication. Data can be stored for at least a couple of hours in the loggers. All data are finally stored in the measurement station. Tape backup is made of all data.

All data are collected by means of pressure transducers connected to different types of data loggers or by manual levelling. The following data loggers are used:

Minitroll: a single channel data logger of stand-alone type where the transducer is integrated in the logger. The logger is submerged in the groundwater.

Mitec: a data logger connected on-line by means of GSM telephony. A pressure transducer of the type Druck PTX is connected to the logger. Only the transducer is submerged in the groundwater. The logger has eight channels, but during monitoring in boreholes, only one channel is used for pressure monitoring and one for monitoring of the battery voltage.

Datataker: a data logger connected on-line by means of radio or network. The logger has 42 channels and is used only for monitoring in percussion and core drilled boreholes.

Monitored data which have been quality assured are to be transferred quarterly to the site characterization database, SICADA.

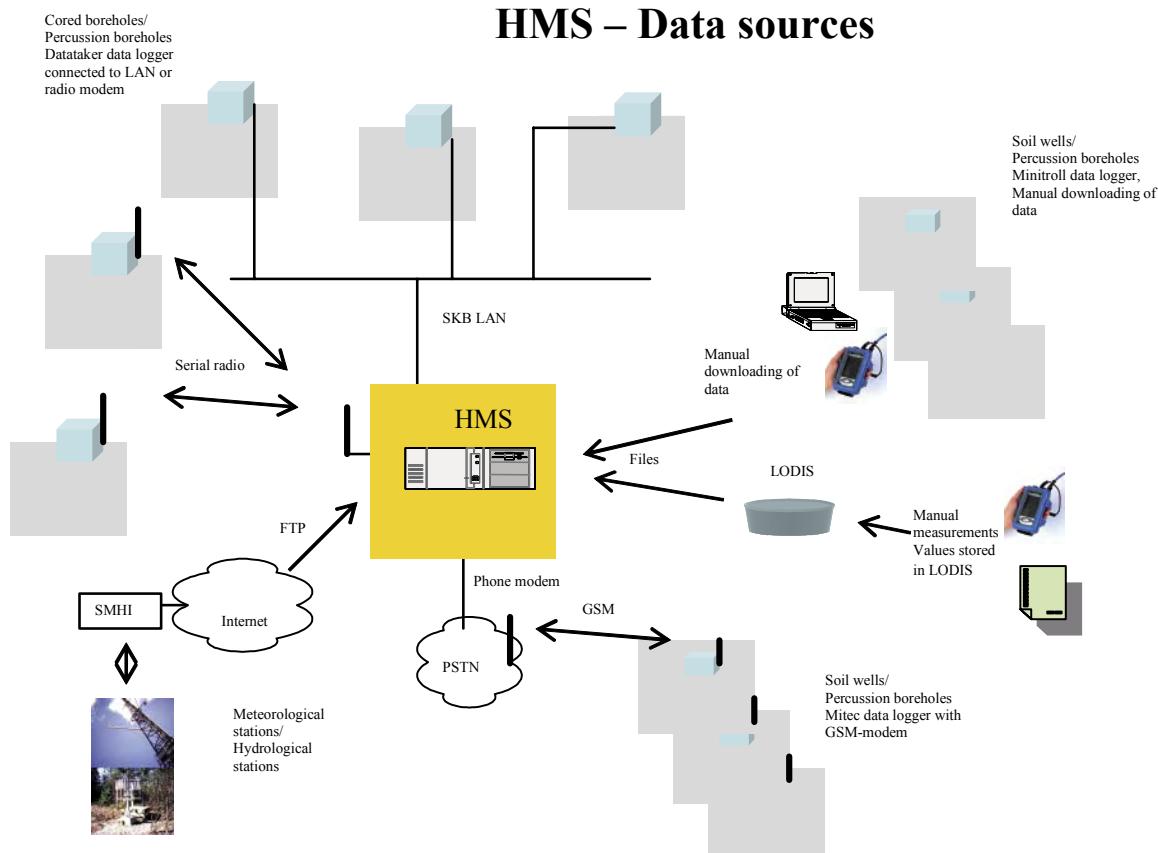


Figure 3-4. HMS data sources.

4 Execution

4.1 General

Data are collected to the measurement system, HMS, as described in Chapter 3.

4.2 Field work

Manual levelling is generally carried out once a month. At the same time, the equipment is checked and maintenance is performed.

All data from stand-alone type loggers are manually dumped into a portable PC and then transmitted to the measurement station, normally once every three months.

4.3 Data handling

4.3.1 Calibration method

Manual levelling of all sections is made, normally once every month, in order to calibrate the registrations from the data loggers.

The logger data are converted to water levels by means of a linear calibration equation. It is also necessary to subtract the air pressure since all transducers give the absolute pressure. Converted logger data are compared with results from manual levelling. If the two differ, calibration constants are adjusted until an acceptable agreement is obtained.

4.3.2 Recording interval

For stand-alone and GSM-connected data loggers, measurements of the groundwater level are normally made with five minute intervals. For all other data loggers connected on-line, levels are normally measured once every ten minutes.

Measured values are not stored unless they differ from the previously stored value by more than 0.1 m for percussion and core drilled boreholes, and 0.05 m for monitoring wells in soil. In addition to this, a value is stored every two hours.

4.4 Quality assurance

Once every week a preliminary inspection of all collected data is performed. The purpose of this is to certify that all loggers are sending data and that all transducers are functioning.

Quarterly, all data collected are subject to a quality check. During this Q/A, obviously erroneous data are removed and calibration constants are corrected so that the monitored data correspond with the manual levelling data (see Section 4.3.1). At this occasion, the status of the equipment is also checked and service might be initiated.

4.5 Nonconformities

There are no nonconformities with respect to the activity plan or the method description.

5 Results

5.1 General

The results are stored in the primary data base SICADA where they are traceable by the activity plan numbers. The data in this data base is available for further analysis.

5.2 Groundwater levels

All monitored sections are listed in Appendix 1.

Diagrams of groundwater levels are presented in Appendix 2. All levels in the diagrams are given as metres above sea level in the national elevation system (RT90-RHB70).

In the diagrams, one data point per section and twenty-four hours is displayed. The data point shown is the first stored data point after midnight. When registrations are missing, manually levelled data, if available, are inserted.

Boreholes included in the monitoring system in Forsmark:

- Core drilled boreholes (10): KFM01A, KFM01B, KFM02A, KFM03A,
KFM03B, KFM04A, KFM05A, KFM07A, KFM08A, KFM08B
- Percussion drilled boreholes (20): HFM02 – HFM05, HFM07 – HFM22
- Monitoring wells in soil (46): SFM0001 - SFM0006, SFM0008 - SFM0023,
SFM0025 - SFM0028, SFM0030, SFM0033 - SFM0034, SFM0036, SFM0038 (=P
FM010038) - SFM0043, SFM0049, SFM0057 - SFM0059, SFM0061 – SFM0062,
SFM0064 - SFM0066, SFM0076

5.2.1 General comments

Results from monitoring in boreholes are presented in diagrams. Level data from all sections in each borehole are presented for the period of August 2004 until July 2005.

The symbols used in the diagrams are:

The lowest section =	Section 1	○ ○ ○ ○ ○ ○ ○ ○ ○ ○ ○
	Section 2	+ + + + + + + + +
	Section 3	× × × × × × × × ×
	Section 4	□ □ □ □ □ □ □ □ □
	Section 5	◇ ◇ ◇ ◇ ◇ ◇ ◇ ◇
	Section 6	Δ Δ Δ Δ Δ Δ Δ Δ Δ
	Section 7	◀◀◀◀◀◀◀◀◀◀◀◀
	Section 8	▽▽▽▽▽▽▽▽▽▽▽▽▽

Sometimes it is difficult to differentiate registrations from individual sections in the diagrams. However, since the main purpose of this report is to present an overall view of the long-term changes, it was not found advantageous to show more detailed diagrams from individual sections. Such diagrams, representing periods of hydraulic tests performed in the investigation area, are presented in reports from the different tests.

5.2.2 Comments on some of the diagrams

Due to failures in the mechanical or electronic equipment, data are sometimes missing for longer or shorter periods. This is not commented on below. For more comments on the diagrams, see Site investigation Internal Report, Table 1-1.

Remarks are given when the registration for some reason has a deviating appearance. When registrations are missing, manually levelled data, if available, are inserted.

In many boreholes, the groundwater level shows large and rapid variations. This is often due to nearby drilling.

The groundwater in many of the monitoring wells in soil has been reported to be frozen from November 2004 to March 2005.

Packers may deflate due to leakage, which can be difficult to discover. If a section in a borehole suddenly indicates a pressure that is close to the pressure in a neighbouring section, the reason might be deflated packers.

SFM0006: From July 2004 to January 2005 and also from July 2005 the borehole is reported to be dry.

SFM0076: The borehole is mostly reported to be dry, except for a period in January 2005.

Appendix 1

Monitored sections


Borehole	Section no	Start Date	Stop Date	Secup (m)	Seclow (m)	Circ section	Z Secup (masl)	Z SecMid (masl)
HFM01	1	2003-06-16	2003-09-08	0.00	200.20		1.73	-96.87
HFM02	1	2002-12-10	2003-01-23	0.00	100.00		3.05	-46.90
	1	2003-01-23	2004-03-15	0.00	100.00		3.05	-46.90
	1	2004-03-18		49.00	100.00		-45.90	-71.38
	2	2004-03-18		38.00	48.00	*	-34.91	-39.91
	3	2004-03-18		0.00	37.00		3.05	-15.43
HFM03	1	2003-01-30	2003-03-05	0.00	26.00		3.15	-9.84
	1	2004-03-18		19.00	26.00		-15.83	-19.32
	2	2004-03-18		0.00	18.00		3.15	-5.84
HFM04	1	2002-12-17	2003-12-10	0.00	221.70		3.87	-106.57
	1	2003-12-10	2004-02-23	0.00	221.70		3.87	-106.57
	1	2004-03-02		66.90	221.70		-62.80	-139.60
	2	2004-03-02		57.90	65.90	*	-53.82	-57.81
	3	2004-03-02		0.00	56.90		3.87	-24.46
HFM05	1	2004-05-12		0.00	200.10		7.67	-92.09
HFM06	1	2003-01-24	2003-02-13	0.00	110.70		6.64	-48.49
	1	2003-02-18	2003-02-21	0.00	110.70		6.64	-48.49
	1	2003-02-27	2003-03-12	0.00	110.70		6.64	-48.49
	1	2003-03-13	2003-03-27	67.50	110.70		-60.57	-81.98
	2	2003-03-13	2003-03-27	51.50	66.50		-44.66	-52.12
	3	2003-03-13	2003-03-27	35.50	50.50		-28.72	-36.19
	4	2003-03-13	2003-03-27	17.50	34.50		-10.79	-19.25
	5	2003-03-13	2003-03-27	0.00	16.50		6.64	-1.58
	1	2003-04-16	2004-02-23	0.00	110.70		6.64	-48.49
	1	2004-02-24	2004-03-05	0.00	110.70		6.64	-48.49
HFM07	1	2003-02-17	2003-02-21	0.00	122.50		5.78	-55.26
	1	2003-02-21	2003-12-10	0.00	122.50		5.78	-55.26
	1	2003-12-10		0.00	122.50		5.78	-55.26
HFM08	1	2003-02-27	2003-03-14	0.00	143.50		7.13	-64.49
	1	2003-03-17	2003-07-09	101.50	143.50		-94.02	-114.72
	2	2003-03-17	2003-07-09	82.00	100.50		-74.69	-83.87
	3	2003-03-17	2003-07-09	0.00	81.00		7.13	-33.29
	1	2004-03-05	2005-02-08	0.00	143.50		7.13	-64.49
	1	2005-02-09		117.00	143.00		-109.31	-122.09
	2	2005-02-09		0.00	116.00		7.13	-50.78
HFM09	1	2003-08-20	2003-10-27	0.00	50.25		5.15	-18.20
	1	2003-10-27		0.00	50.25		5.15	-18.20
HFM10	1	2003-12-16	2004-11-02	0.00	150.00		4.99	-65.40
	1	2004-11-04		100.00	150.00		-88.51	-111.40
	2	2004-11-04		0.00	99.00		4.99	-41.53


Borehole	Section no	Start Date	Stop Date	Secup (m)	Seclow (m)	Circ section	Z Secup (masl)	Z SecMid (masl)
HFM11	1	2003-09-09	2003-09-30	0.00	182.35		7.56	-59.11
	1	2004-01-22	2005-03-15	0.00	182.35		7.56	-59.11
	1	2005-03-16		54.00	182.35		-32.63	-77.71
	2	2005-03-16		0.00	53.00		7.56	-12.32
HFM12	1	2003-09-30	2003-10-03	0.00	209.55		7.03	-69.40
	1	2004-01-22	2005-03-15	0.00	209.55		7.03	-69.40
	1	2005-03-18		57.50	209.50		-35.71	-88.92
	2	2005-03-18		0.00	56.50		7.03	-14.26
HFM13	1	2003-10-03	2004-11-08	0.00	175.60		5.69	-70.89
	1	2004-12-16		159.00	173.00	*	-132.61	-138.60
	2	2004-12-16		101.00	158.00		-82.39	-107.16
	3	2004-12-16		0.00	100.00		5.69	-37.79
HFM14	1	2003-10-13	2003-10-15	0.00	150.50		3.91	-62.21
	1	2003-11-10	2004-01-21	0.00	150.50		3.91	-62.21
	1	2004-01-21		0.00	150.50		3.91	-62.21
HFM15	1	2003-11-03	2004-01-21	0.00	99.50		3.88	-31.02
	1	2004-01-23	2005-01-31	0.00	99.50		3.88	-31.02
	1	2005-02-04		85.00	95.00	*	-55.64	-59.05
	2	2005-02-04		0.00	84.00		3.88	-25.59
HFM16	1	2003-11-26	2004-09-29	0.00	132.50		3.21	-62.93
	1	2004-09-29		0.00	132.50		3.21	-62.93
HFM17	1	2003-12-10		0.00	210.65		3.75	-100.94
HFM18	1	2004-05-04		0.00	180.65		5.04	-70.77
HFM19	1	2004-02-13	2004-04-29	151.00	185.20		-116.70	-129.78
	2	2004-02-13	2004-04-29	11.00	150.00		-5.69	-62.32
	3	2004-02-13	2004-04-29	0.00	10.00		3.66	-0.59
	1	2004-05-07	2004-09-29	0.00	185.20		3.66	-71.72
	1	2005-01-25		168.00	182.00	*	-129.70	-135.05
	2	2005-01-25		104.00	167.00		-80.54	-104.82
	3	2005-01-25		0.00	103.00		3.66	-39.22
HFM20	1	2004-06-03	2005-02-18	0.00	301.00		2.97	-147.33
	1	2005-03-03		131.00	301.00		-127.84	-212.75
	2	2005-03-03		101.00	130.00		-97.85	-112.34
	3	2005-03-03		49.00	100.00		-45.88	-71.36
	4	2005-03-03		0.00	48.00		2.97	-20.95
HFM21	1	2004-06-09	2004-06-14	38.00	202.00		-28.04	-94.30
	2	2004-06-09	2004-06-14	0.00	37.00		3.98	-11.68
	1	2004-06-14		0.00	202.00		3.98	-79.41
HFM22	1	2004-09-13	2004-09-16	0.00	222.00		1.54	-86.50
	1	2004-10-20		0.00	222.00		1.54	-86.50
KFM01A	1	2003-06-17	2003-12-16	132.00	1001.49		-128.23	-558.65
	2	2003-06-17	2003-12-16	110.00	131.00		-106.34	-116.79
	3	2003-06-17	2003-12-16	0.00	109.00		3.13	-51.12
	1	2004-02-24	2004-05-07	0.00	1001.49		3.13	-493.66


Borehole	Section no	Start Date	Stop Date	Secup (m)	Seclow (m)	Circ section	Z Secup (masl)	Z SecMid (masl)
	1	2004-06-04	2004-10-25	0.00	1001.49		3.13	-493.66
	1	2004-11-26		431.00	1001.49		-424.77	-705.16
	2	2004-11-26		374.00	430.00		-368.37	-396.09
	3	2004-11-26		205.00	373.00		-200.75	-284.11
	4	2004-11-26		131.00	204.00		-127.23	-163.50
	5	2004-11-26		109.00	130.00	*	-105.35	-115.79
	6	2004-11-26		0.00	108.00		3.13	-50.63
KFM01B	1	2004-10-14		142.00	500.00		-135.78	-308.50
	2	2004-10-14		101.00	141.00		-95.80	-115.32
	3	2004-10-14		0.00	100.00		3.09	-45.92
KFM02A	1	2004-03-29	2004-04-28	0.00	1002.44		7.35	-492.08
	1	2004-05-12	2004-10-22	0.00	1002.44		7.35	-492.08
	1	2005-04-11	2005-05-17	0.00	1002.44		7.35	-492.08
	1	2005-06-13		889.00	1002.00		-876.66	-932.50
	2	2005-06-13		519.00	888.00		-509.77	-692.93
	3	2005-06-13		490.00	518.00	*	-480.92	-494.85
	4	2005-06-13		443.00	489.00		-434.14	-457.03
	5	2005-06-13		411.00	442.00	*	-402.28	-417.71
	6	2005-06-13		241.00	410.00		-232.96	-317.14
	7	2005-06-13		133.00	240.00		-125.31	-178.66
	8	2005-06-13		0.00	132.00		7.35	-58.46
KFM03A	1	2003-12-15	2004-01-28	0.00	1001.19		8.29	-490.66
	1	2004-08-06	2004-11-15	0.00	1001.19		8.29	-490.66
	1	2005-05-09		969.50	994.50	*	-956.74	-969.14
	2	2005-05-09		820.50	968.50		-808.80	-882.29
	3	2005-05-09		651.00	819.50		-640.30	-724.04
	4	2005-05-09		633.50	650.00	*	-622.90	-631.10
	5	2005-05-09		472.50	632.50		-462.70	-542.32
	6	2005-05-09		402.50	471.50		-393.00	-427.35
	7	2005-05-09		351.50	401.50		-342.21	-367.11
	8	2005-05-09		0.00	350.50		8.29	-166.53
KFM03B	1	2005-01-27		52.00	102.00		-43.34	-68.24
	2	2005-01-27		0.00	51.00		8.47	-16.94
KFM04A	1	2004-02-24	2004-04-07	0.00	1001.42		8.77	-420.18
	1	2004-06-30		0.00	1001.42		8.77	-420.18
KFM05A	1	2004-06-11	2004-09-09	0.00	1002.71		5.53	-418.69
	1	2004-12-01	2004-12-07	0.00	1002.71		5.53	-418.69
KFM07A	1	2005-05-13		271.00	1001.55		-228.76	-531.37
	2	2005-05-13		0.00	270.00		3.33	-112.95
KFM08A	1	2005-05-21	2005-05-31	0.00	1001.19		2.49	-408.66
KFM08B	1	2005-04-18		0.00	200.54		2.25	-83.12

Appendix 2


Groundwater level

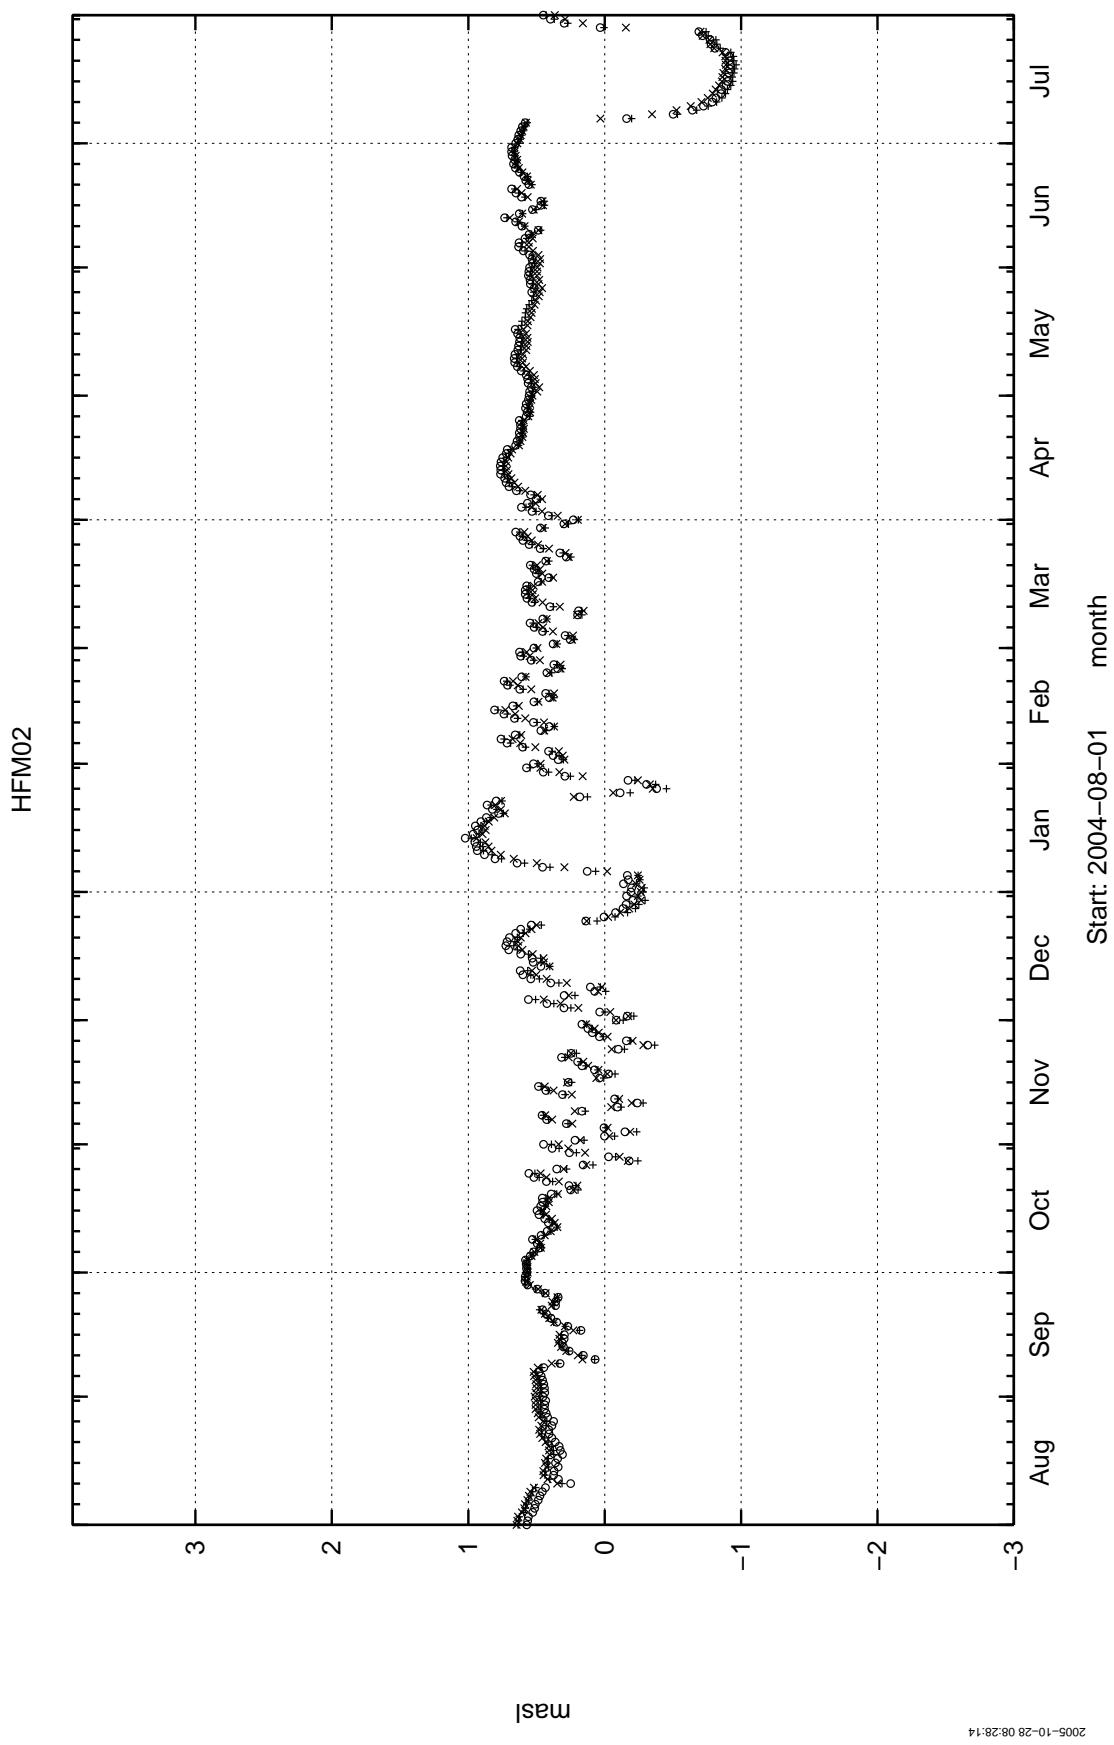

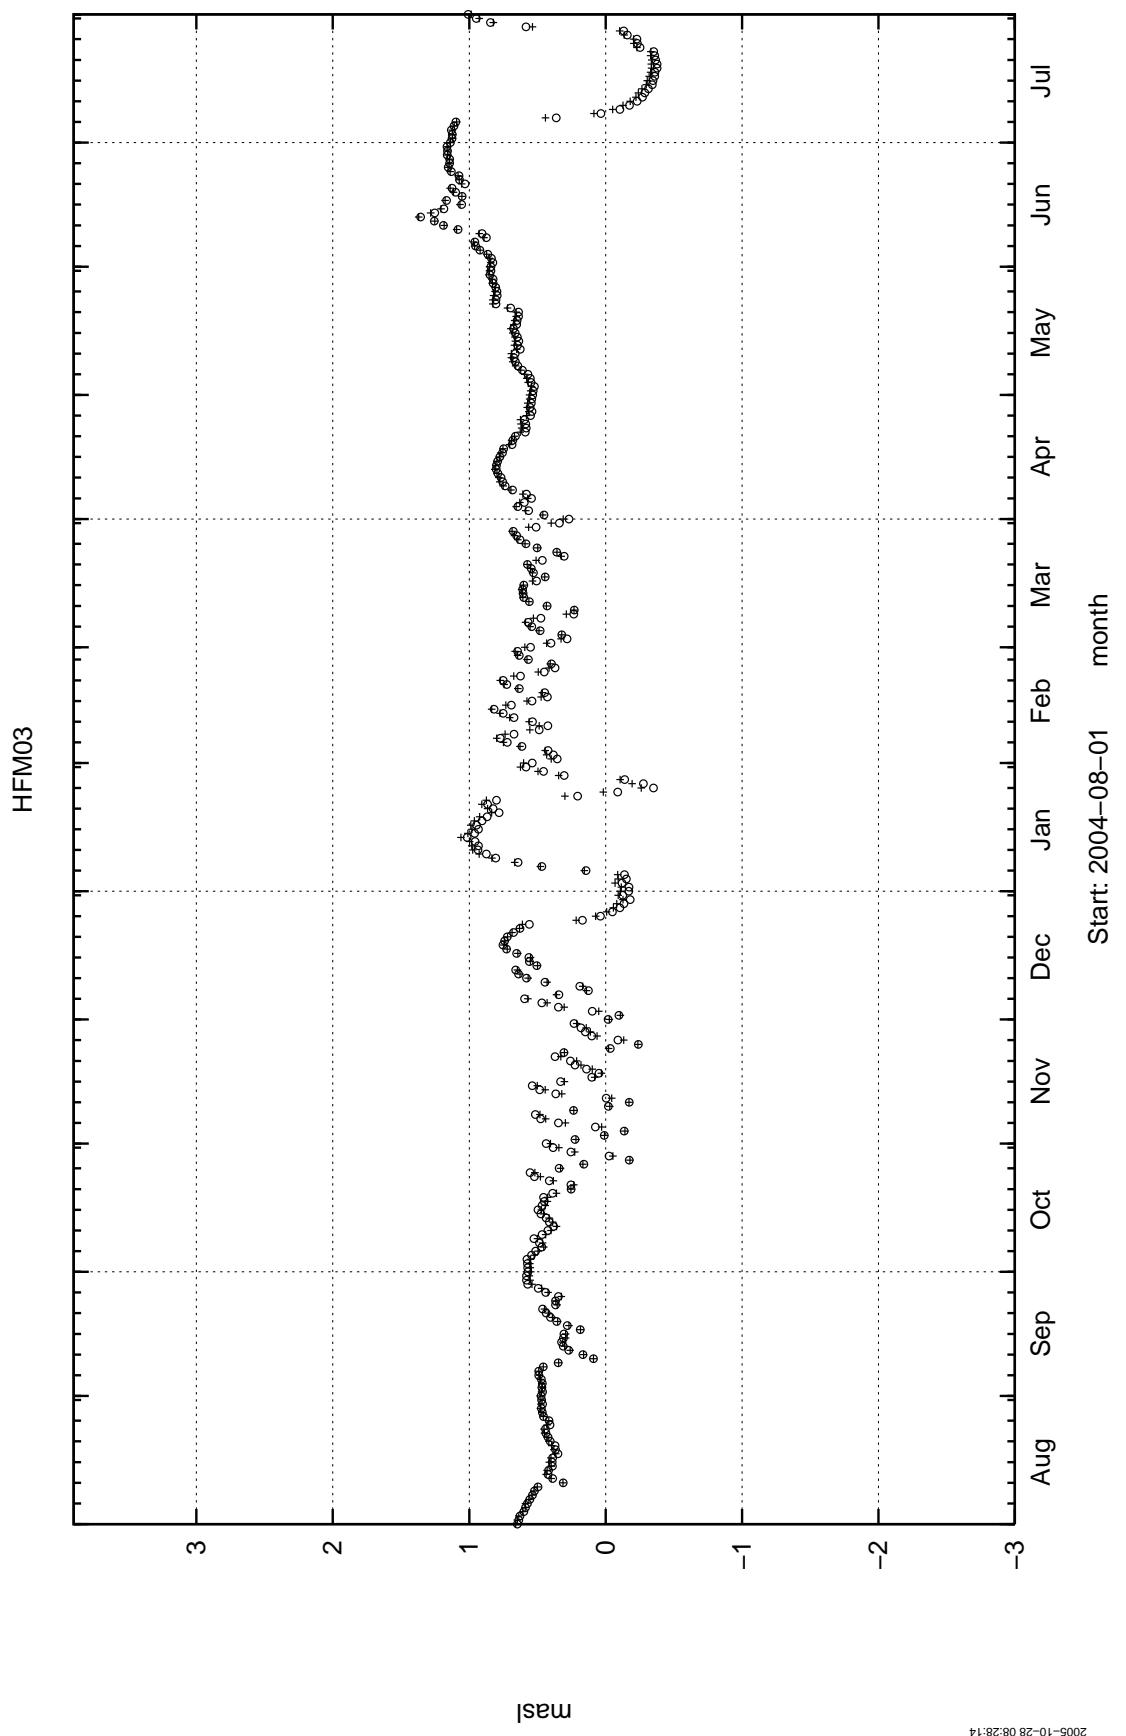


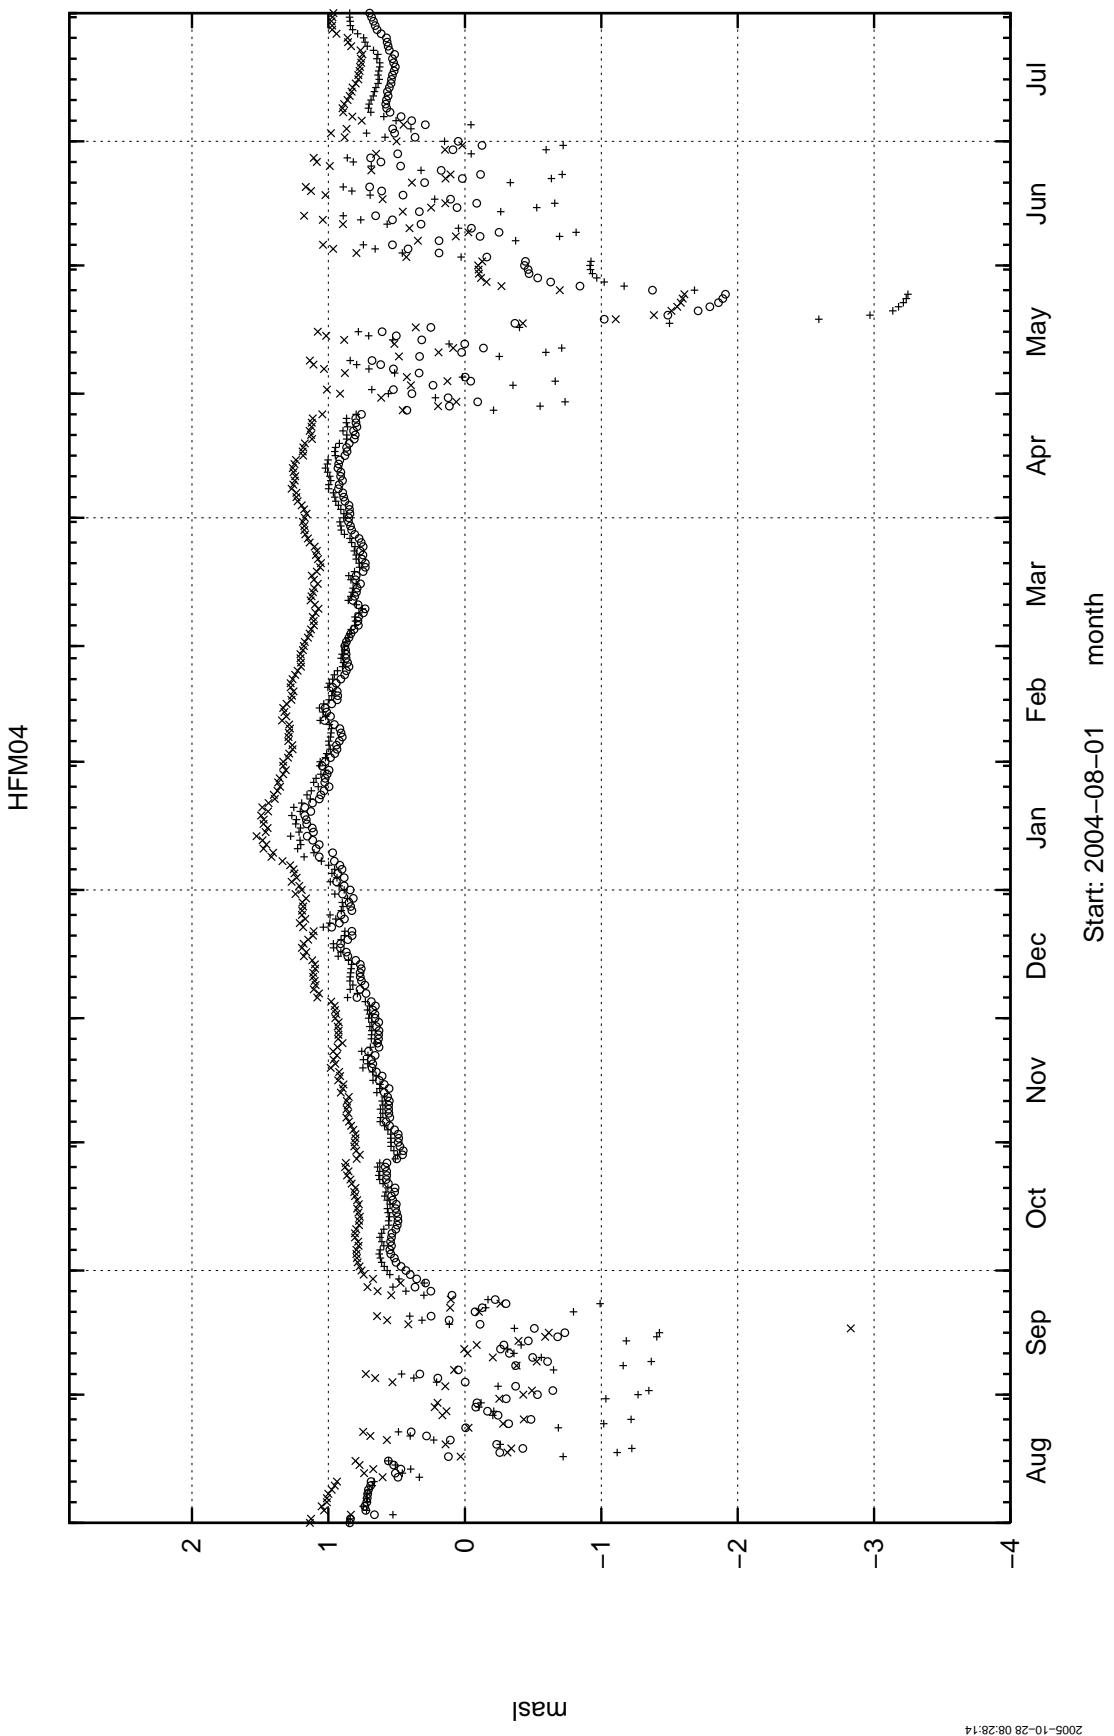


HFM05

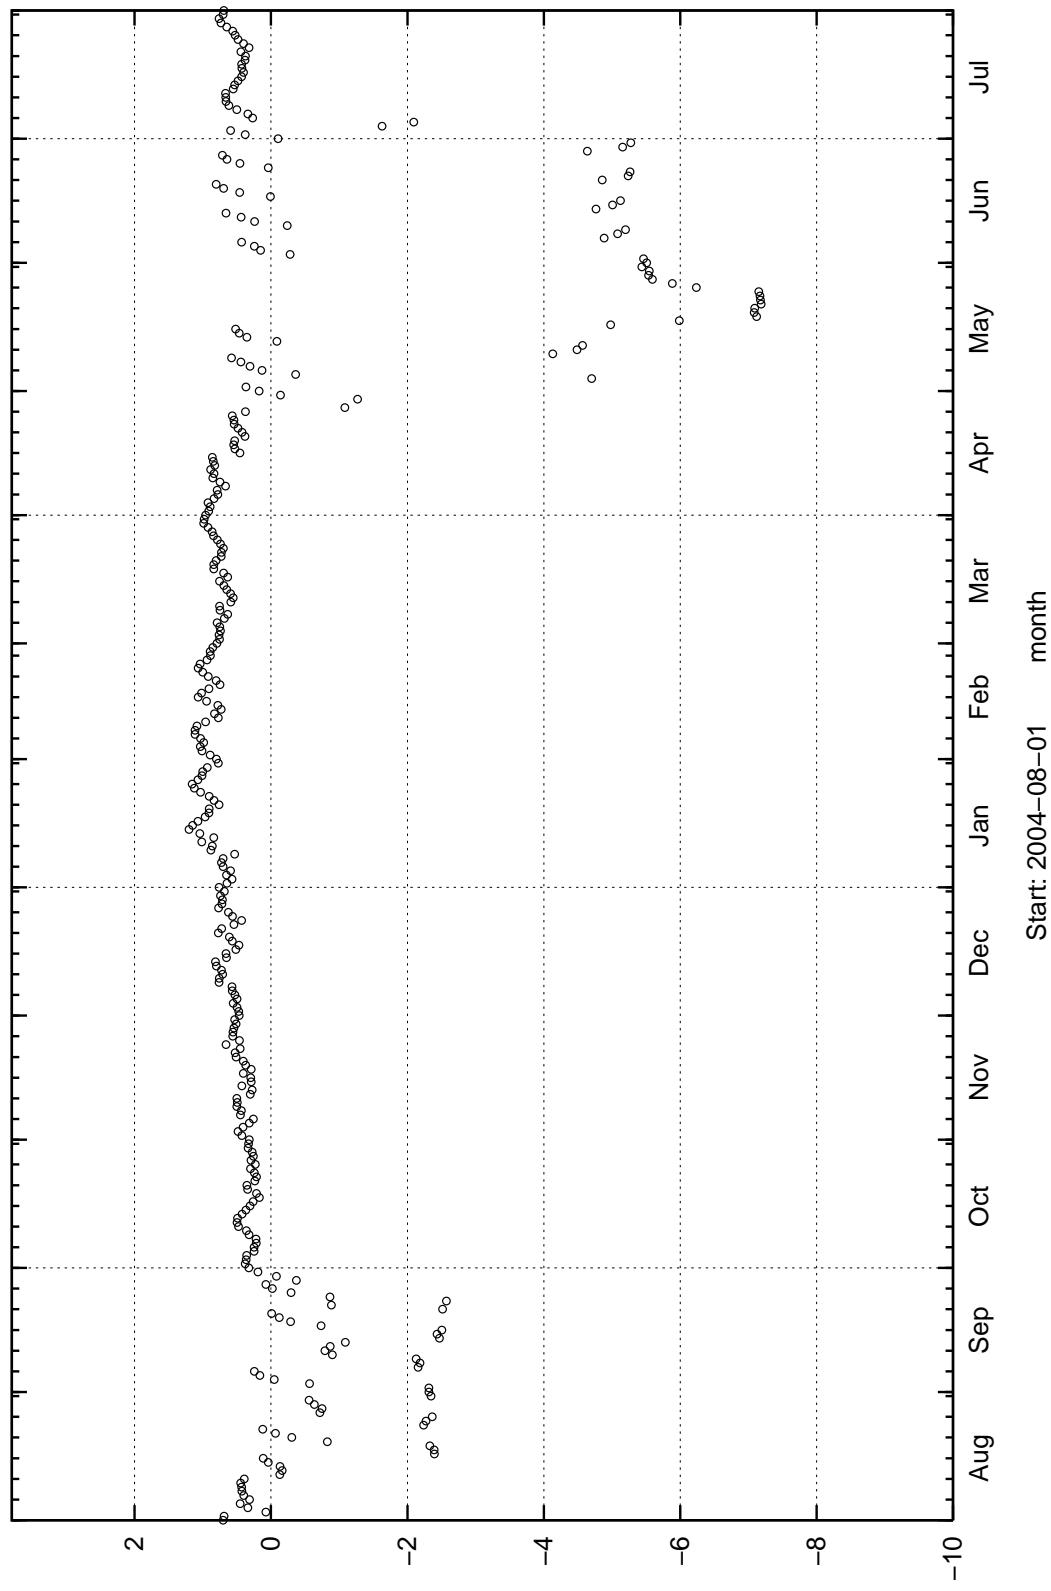


2005-10-28 08:28:14

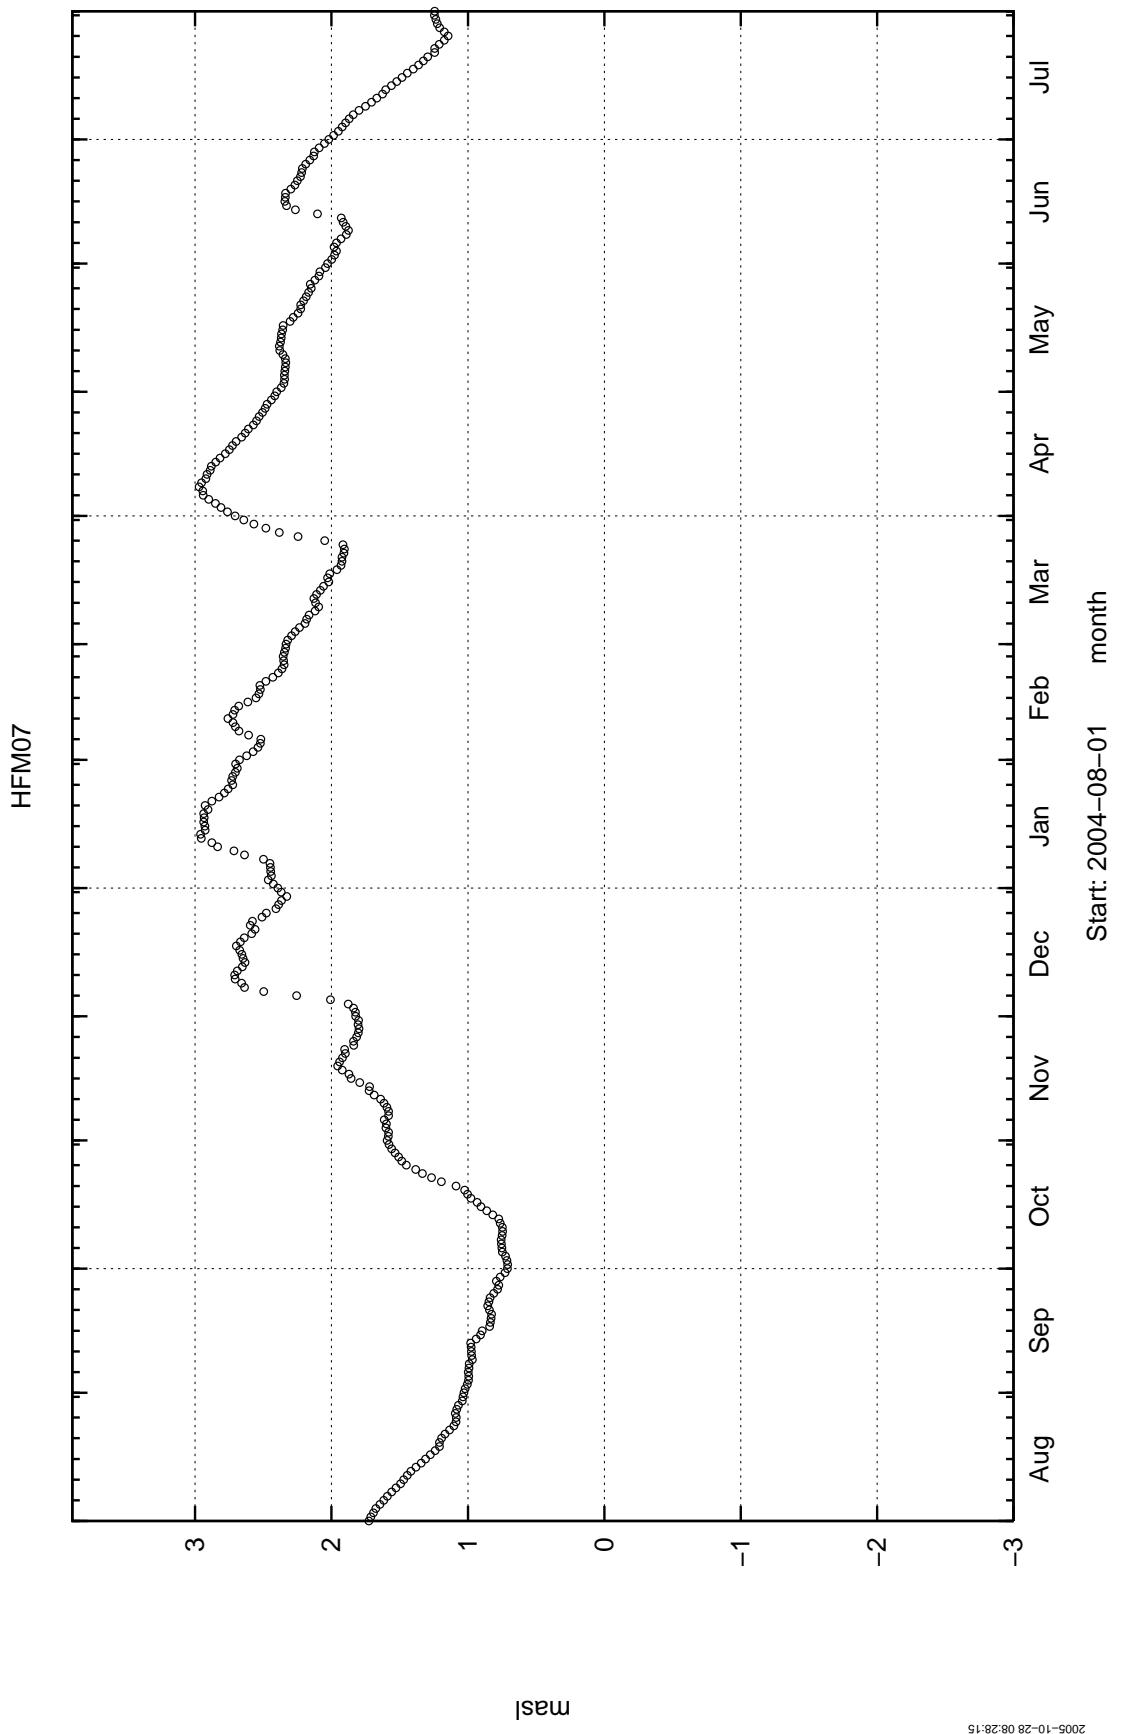


2005-10-28 08:28:15

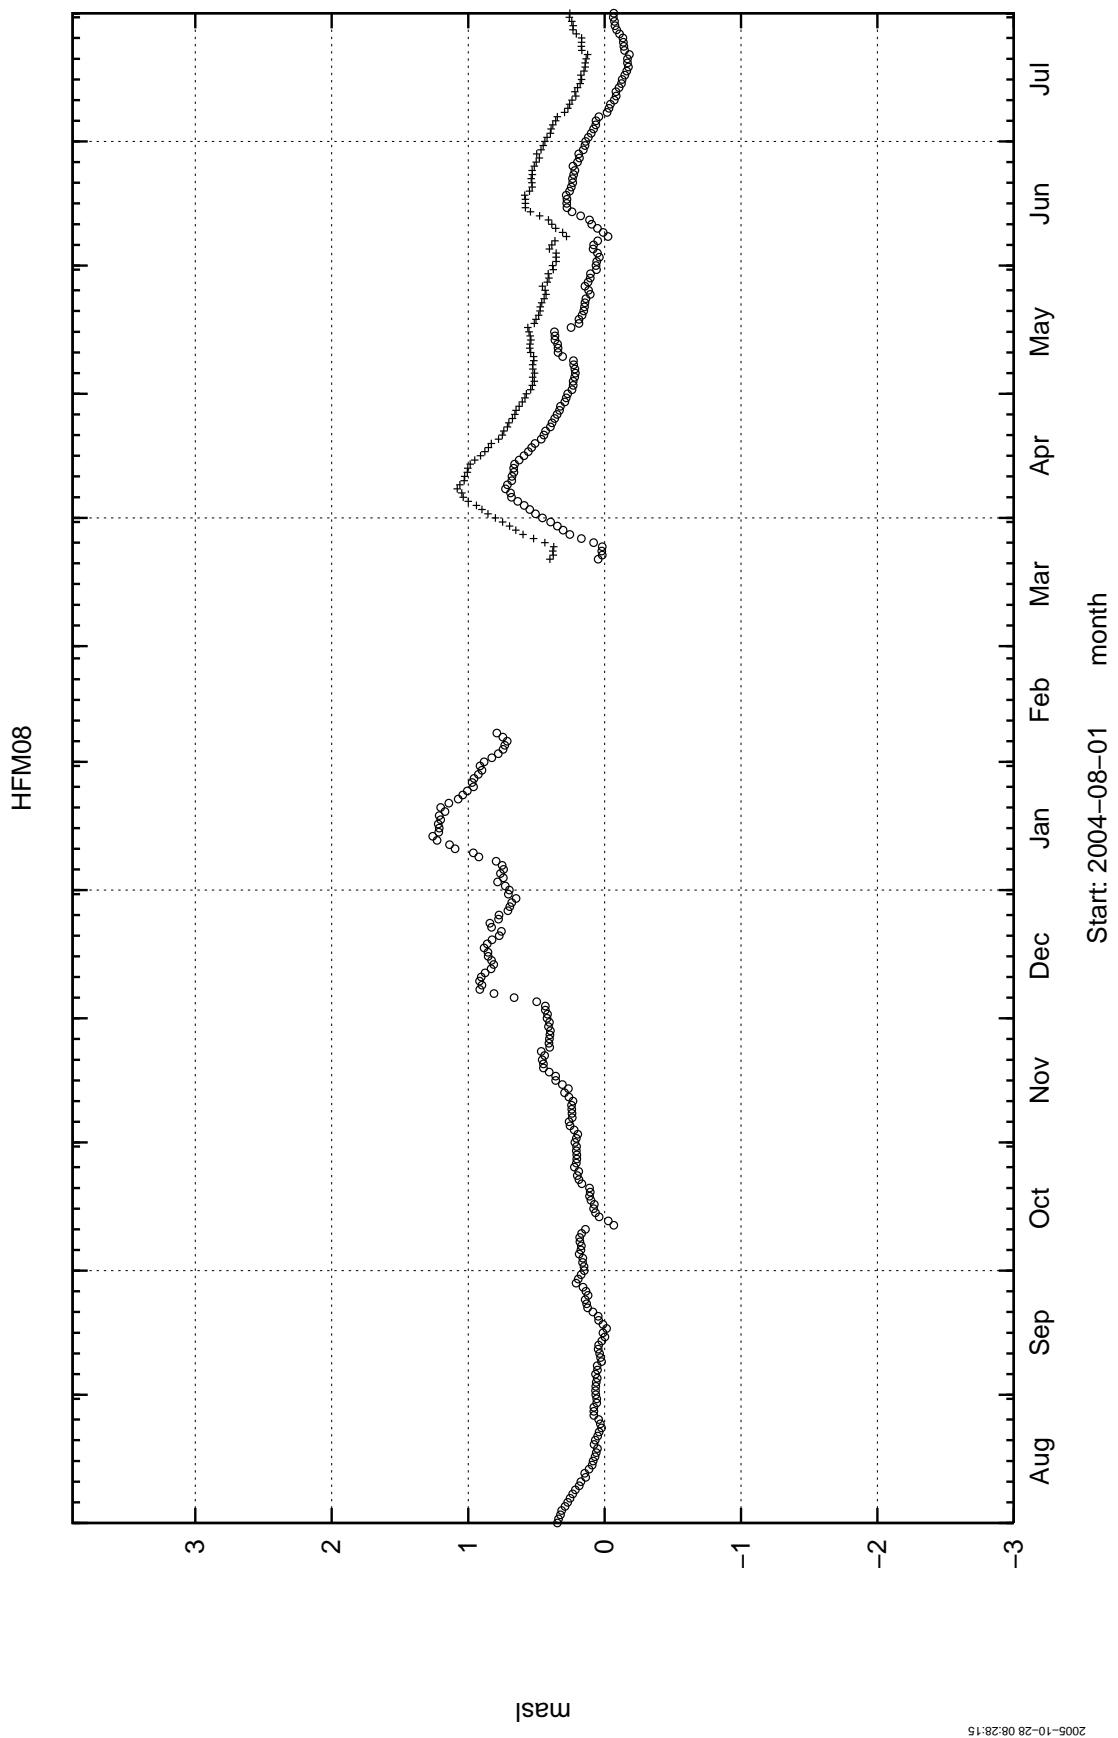


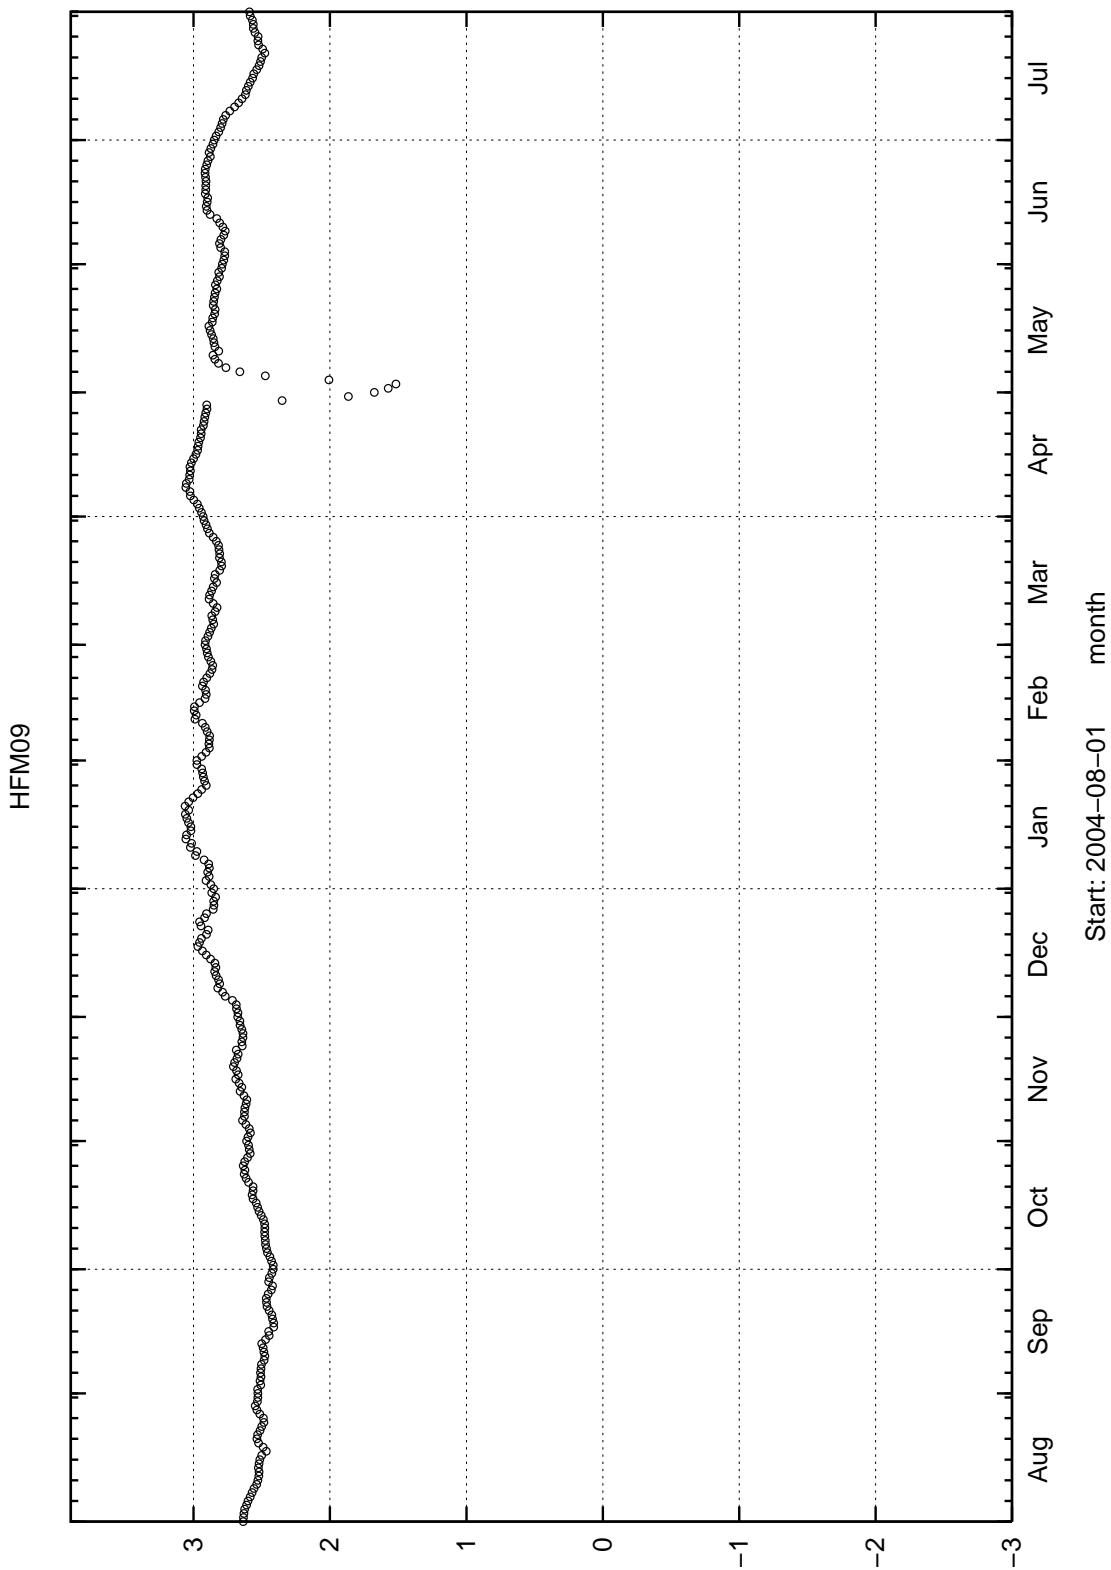

masl


2005-10-28 08:28:15

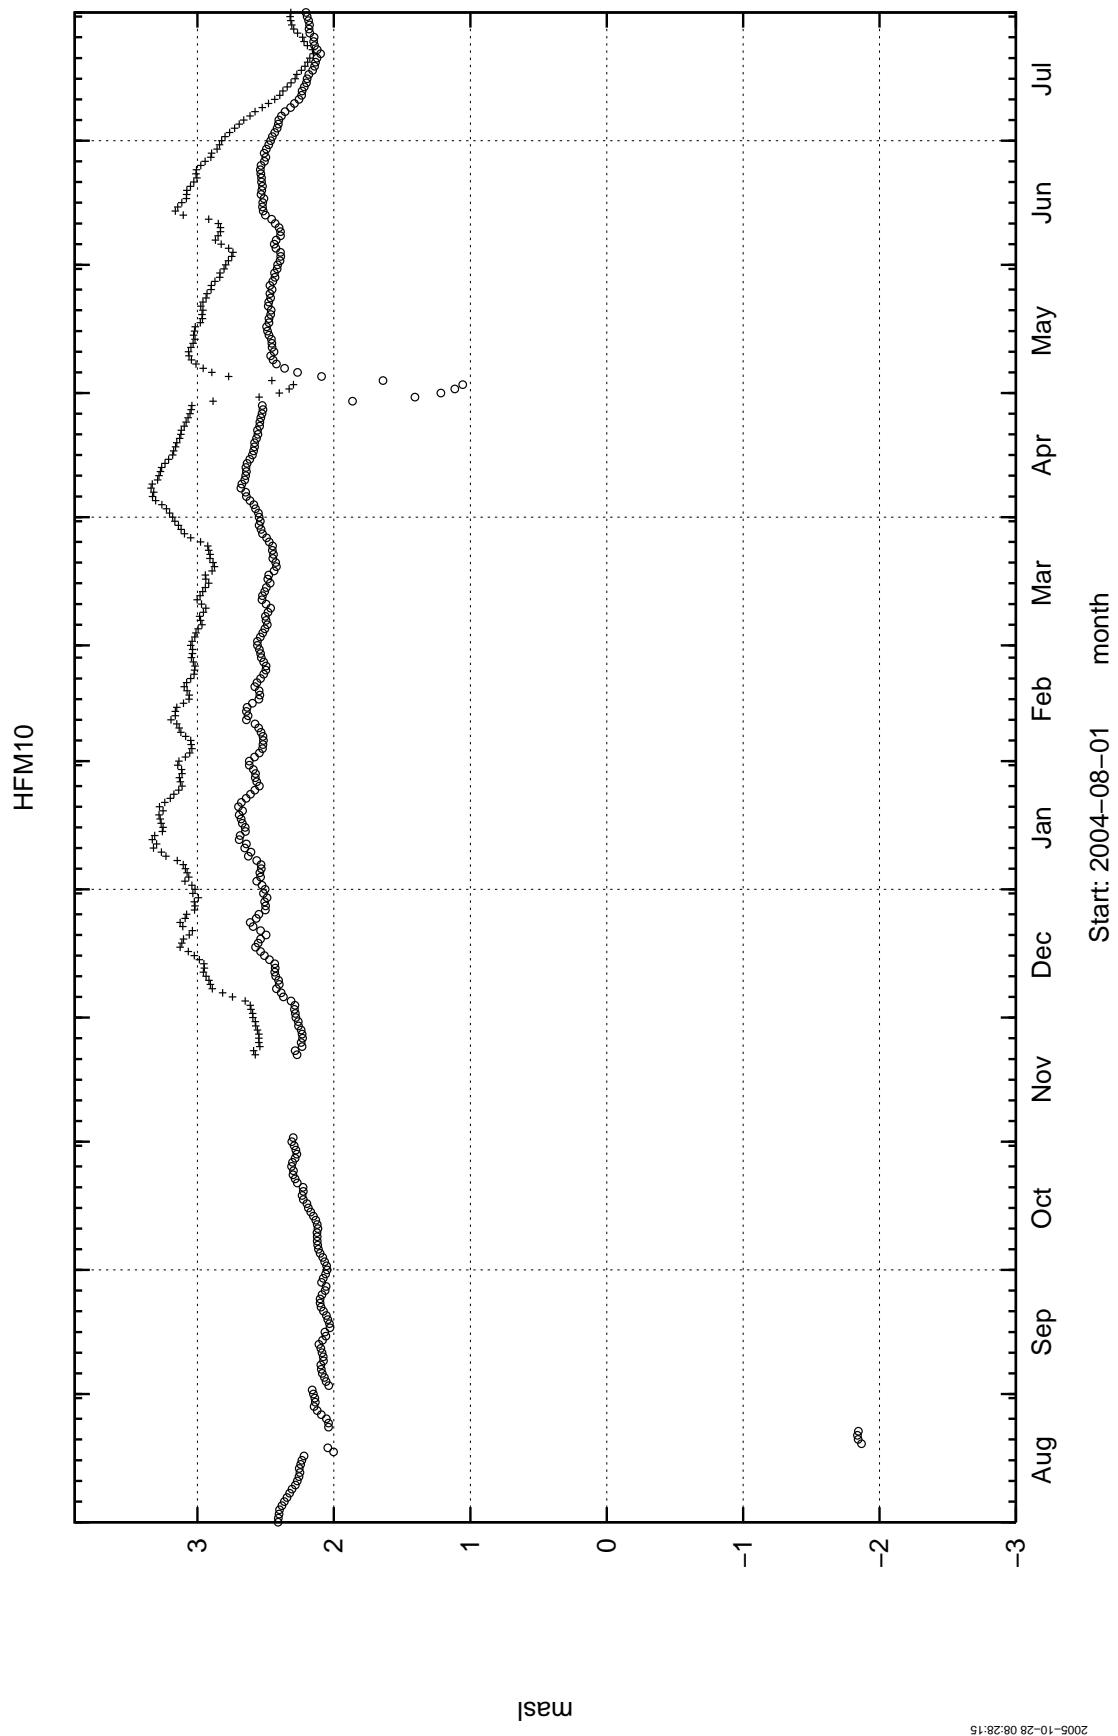


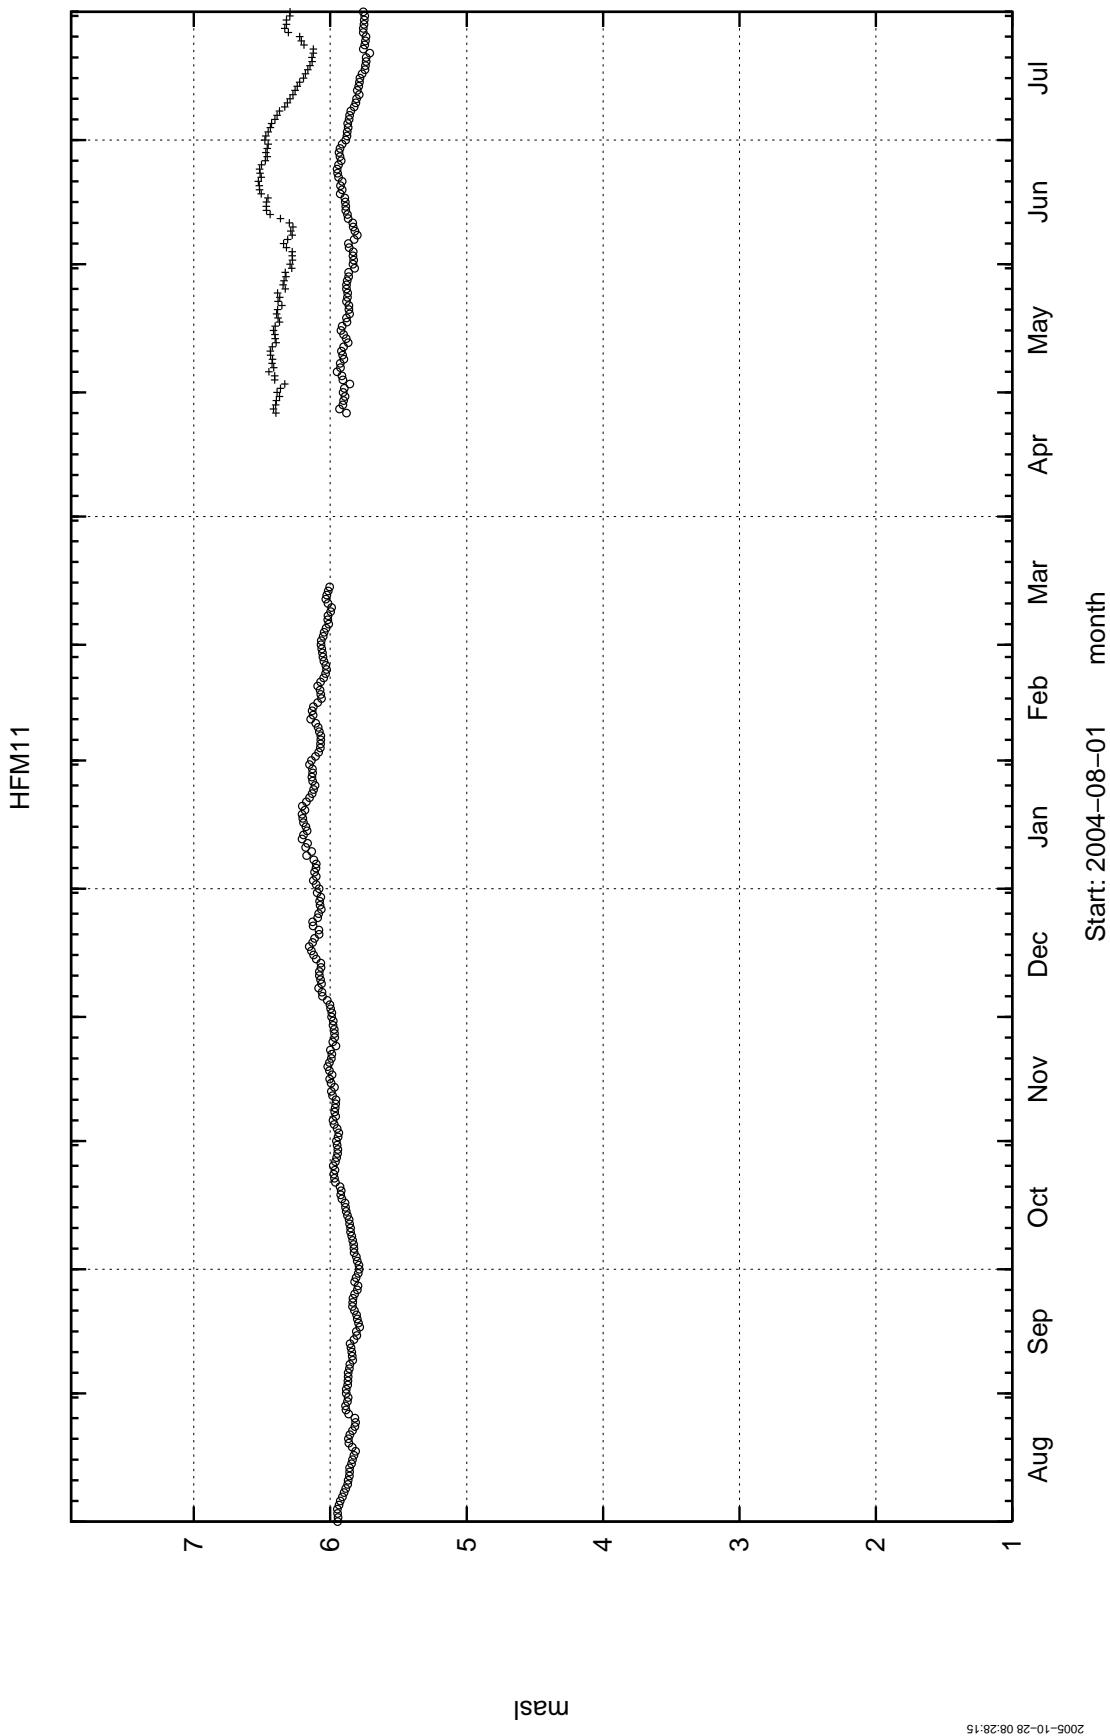



masl


2005-10-26 08:28:15

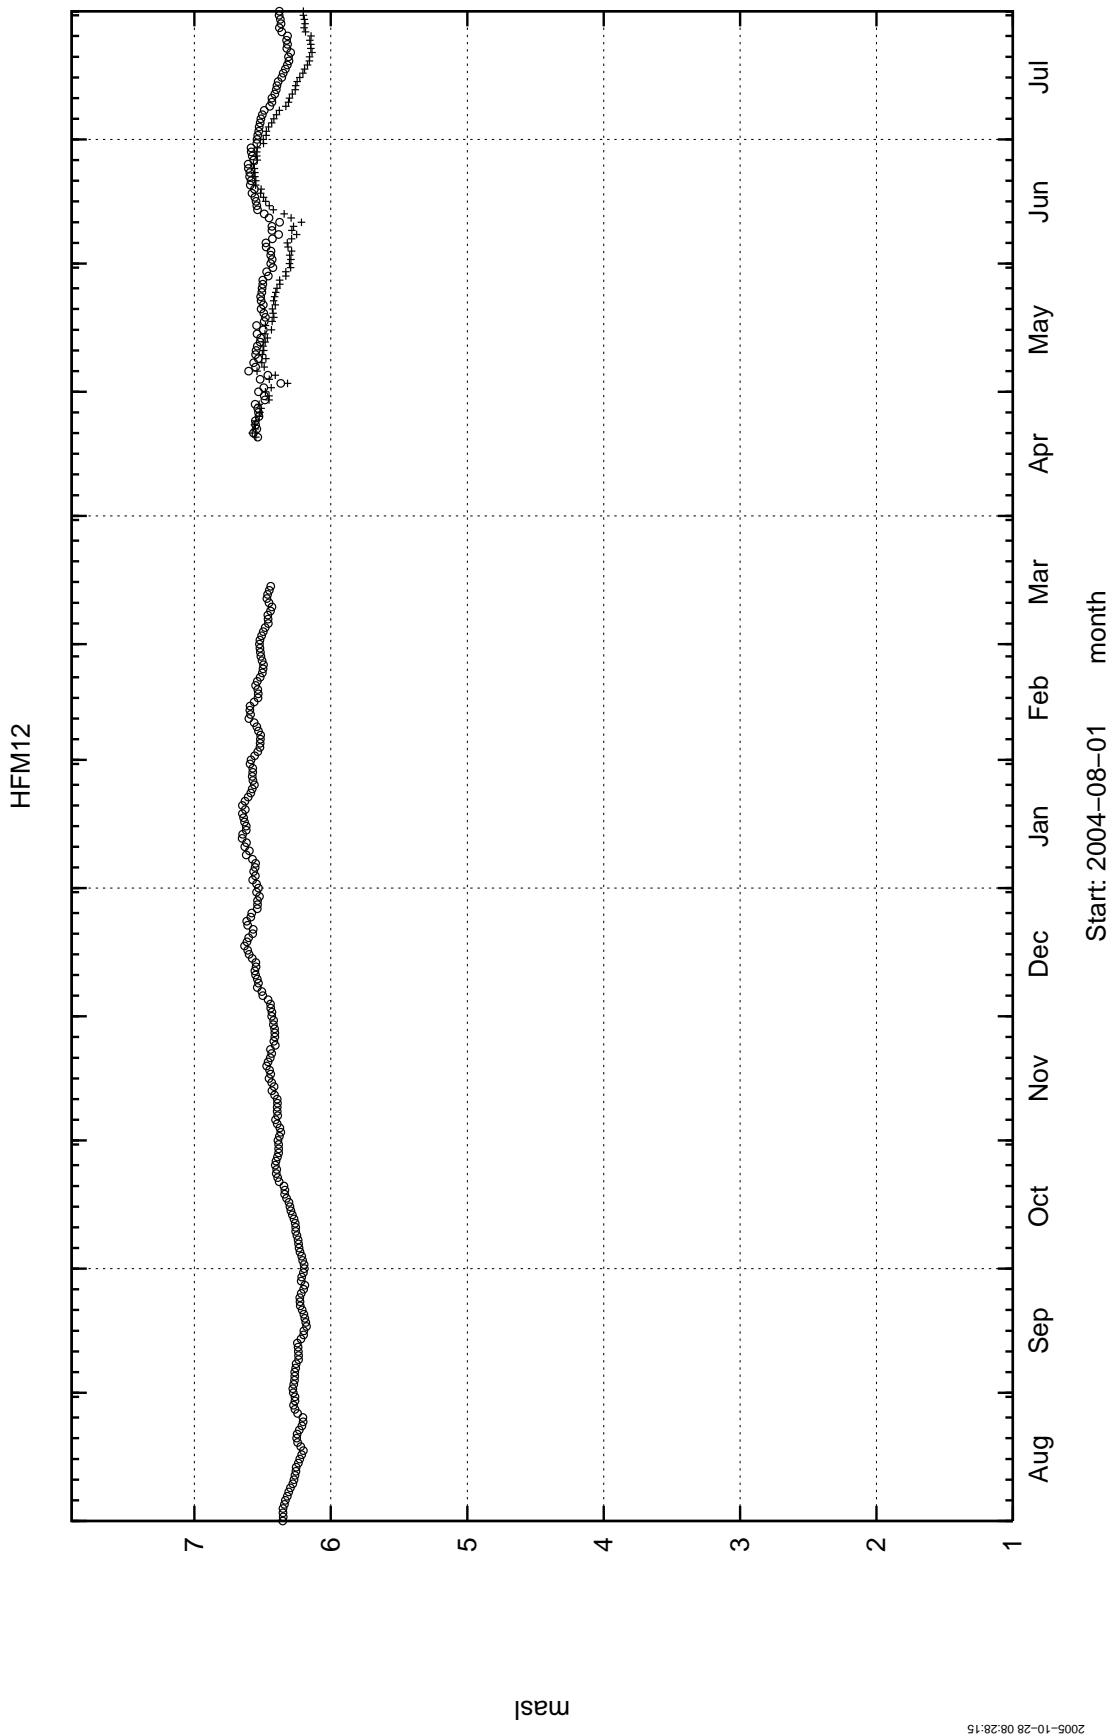


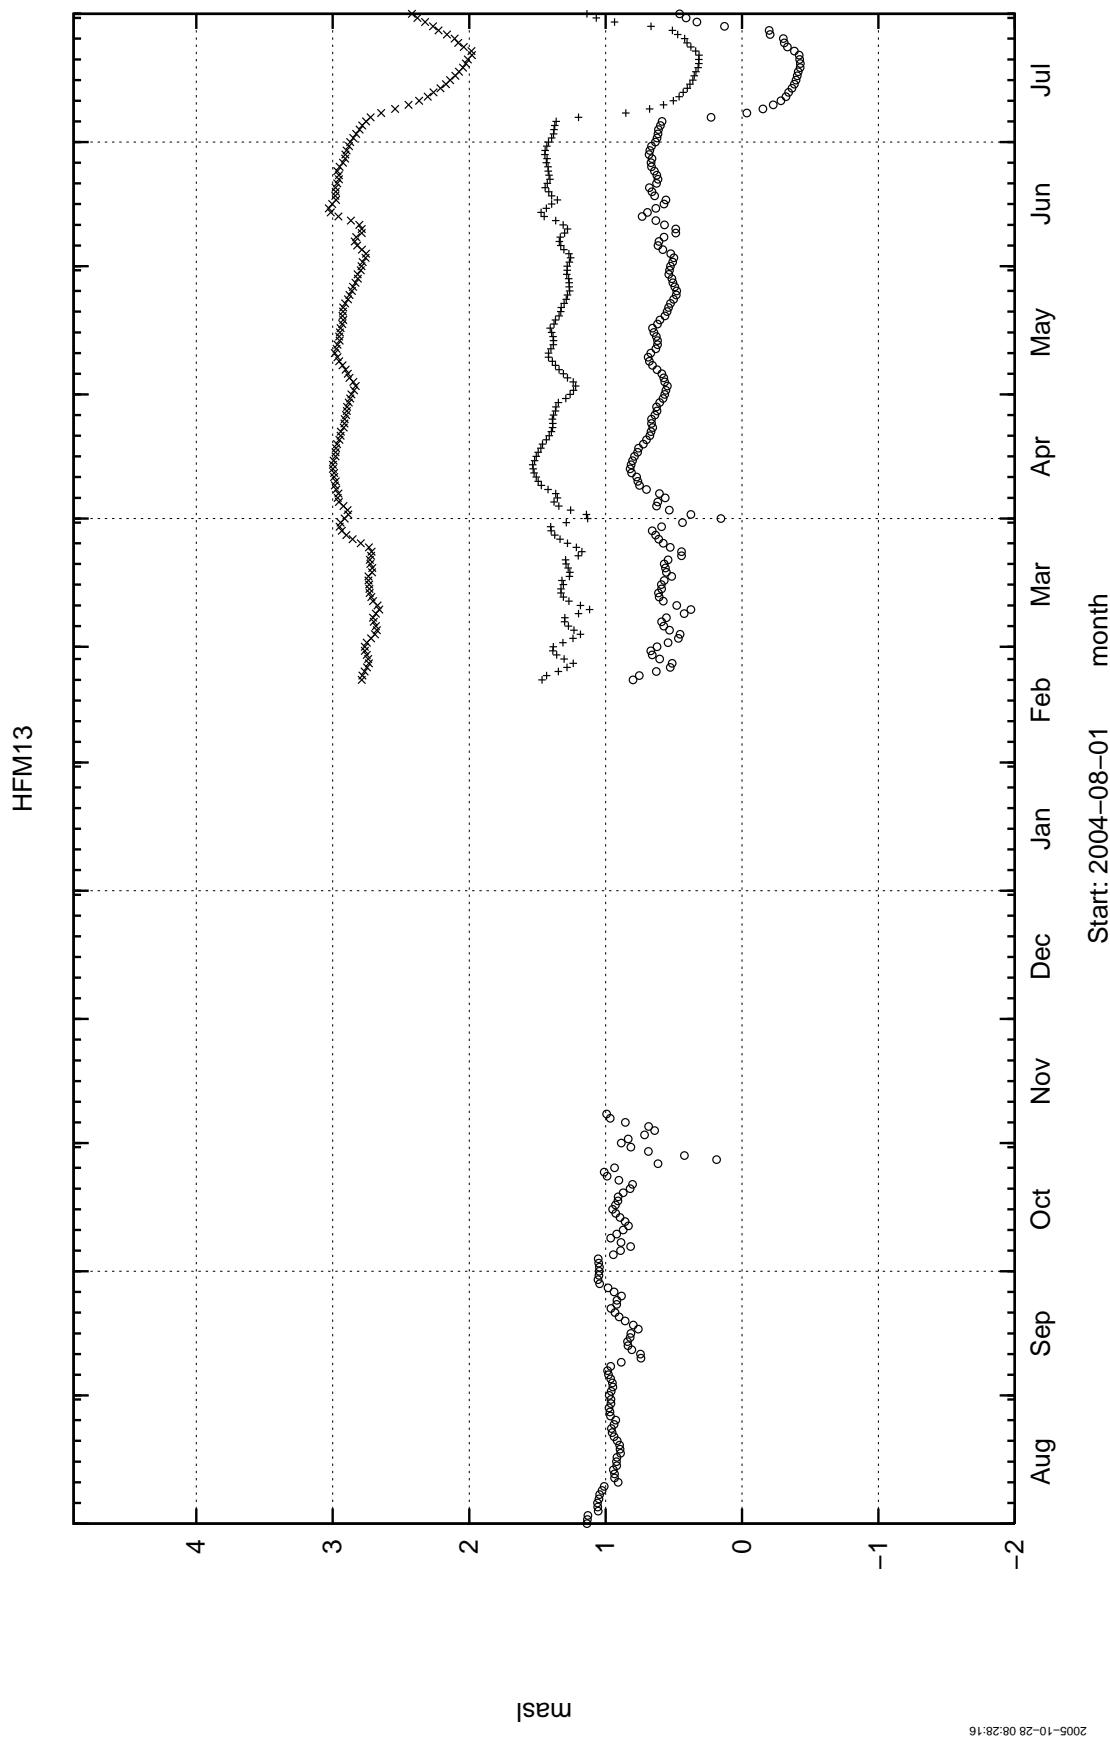


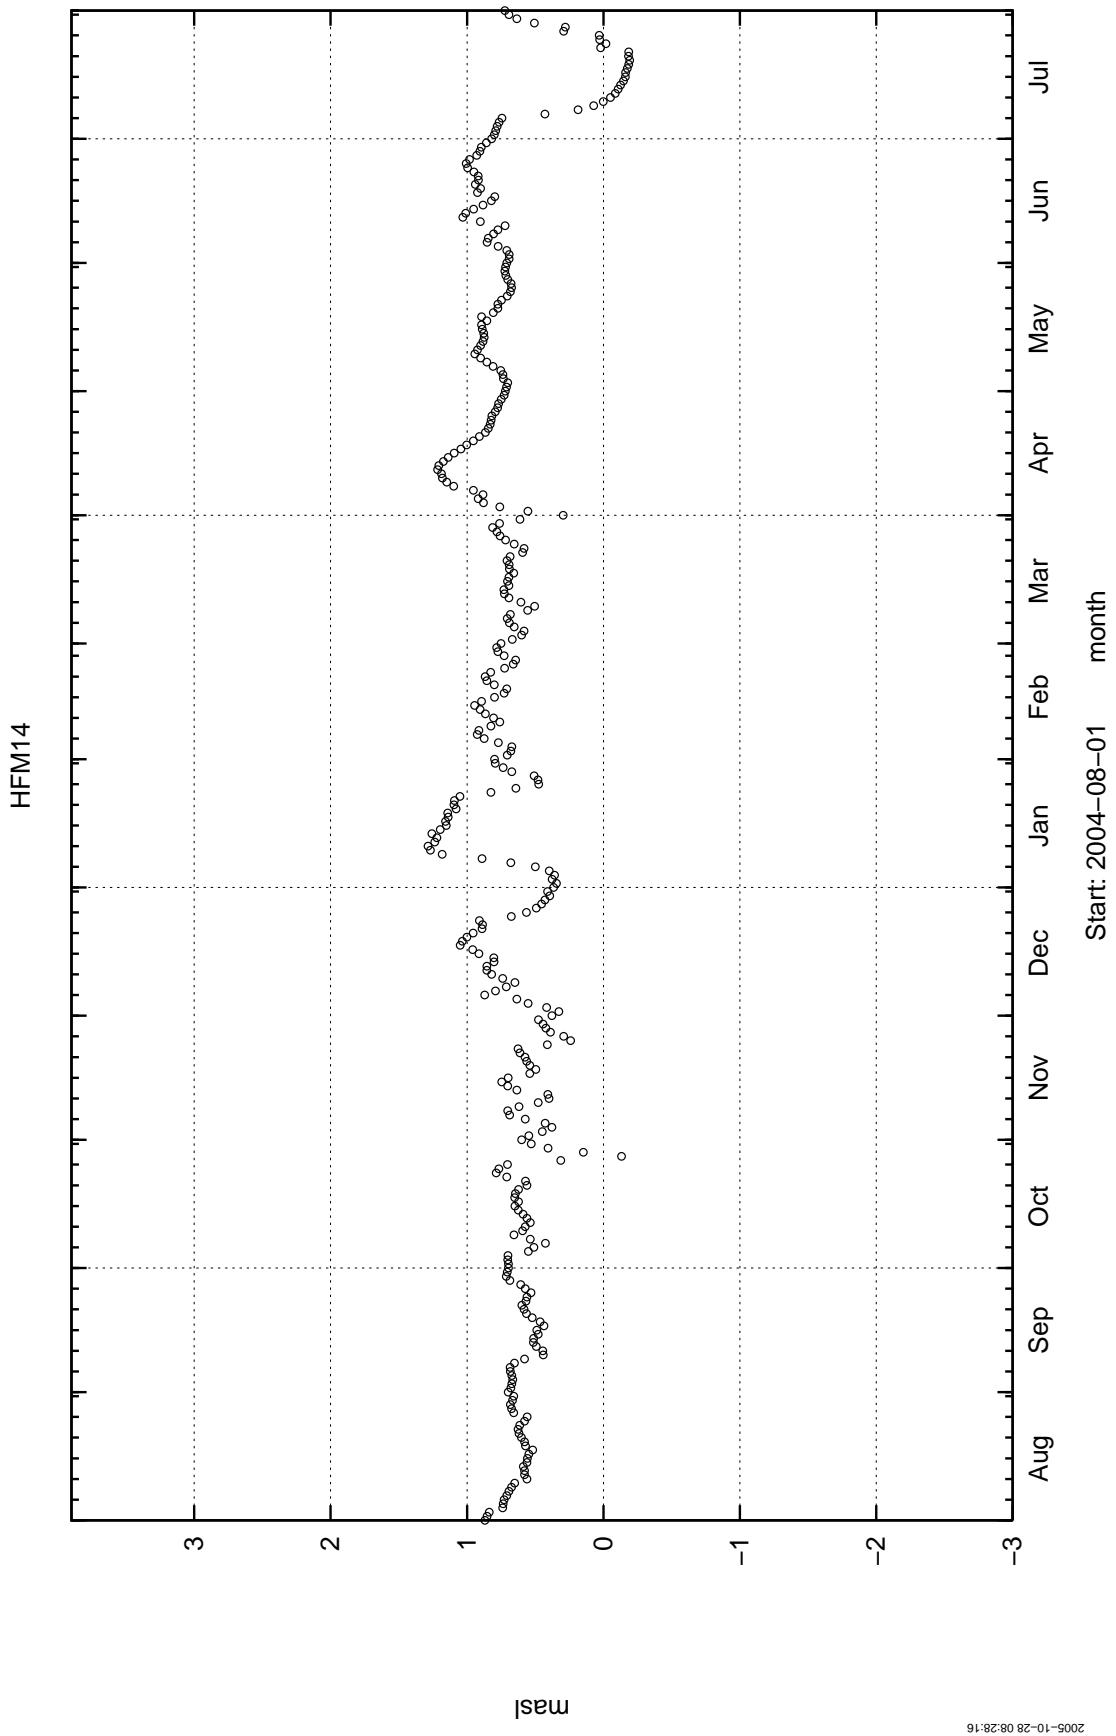


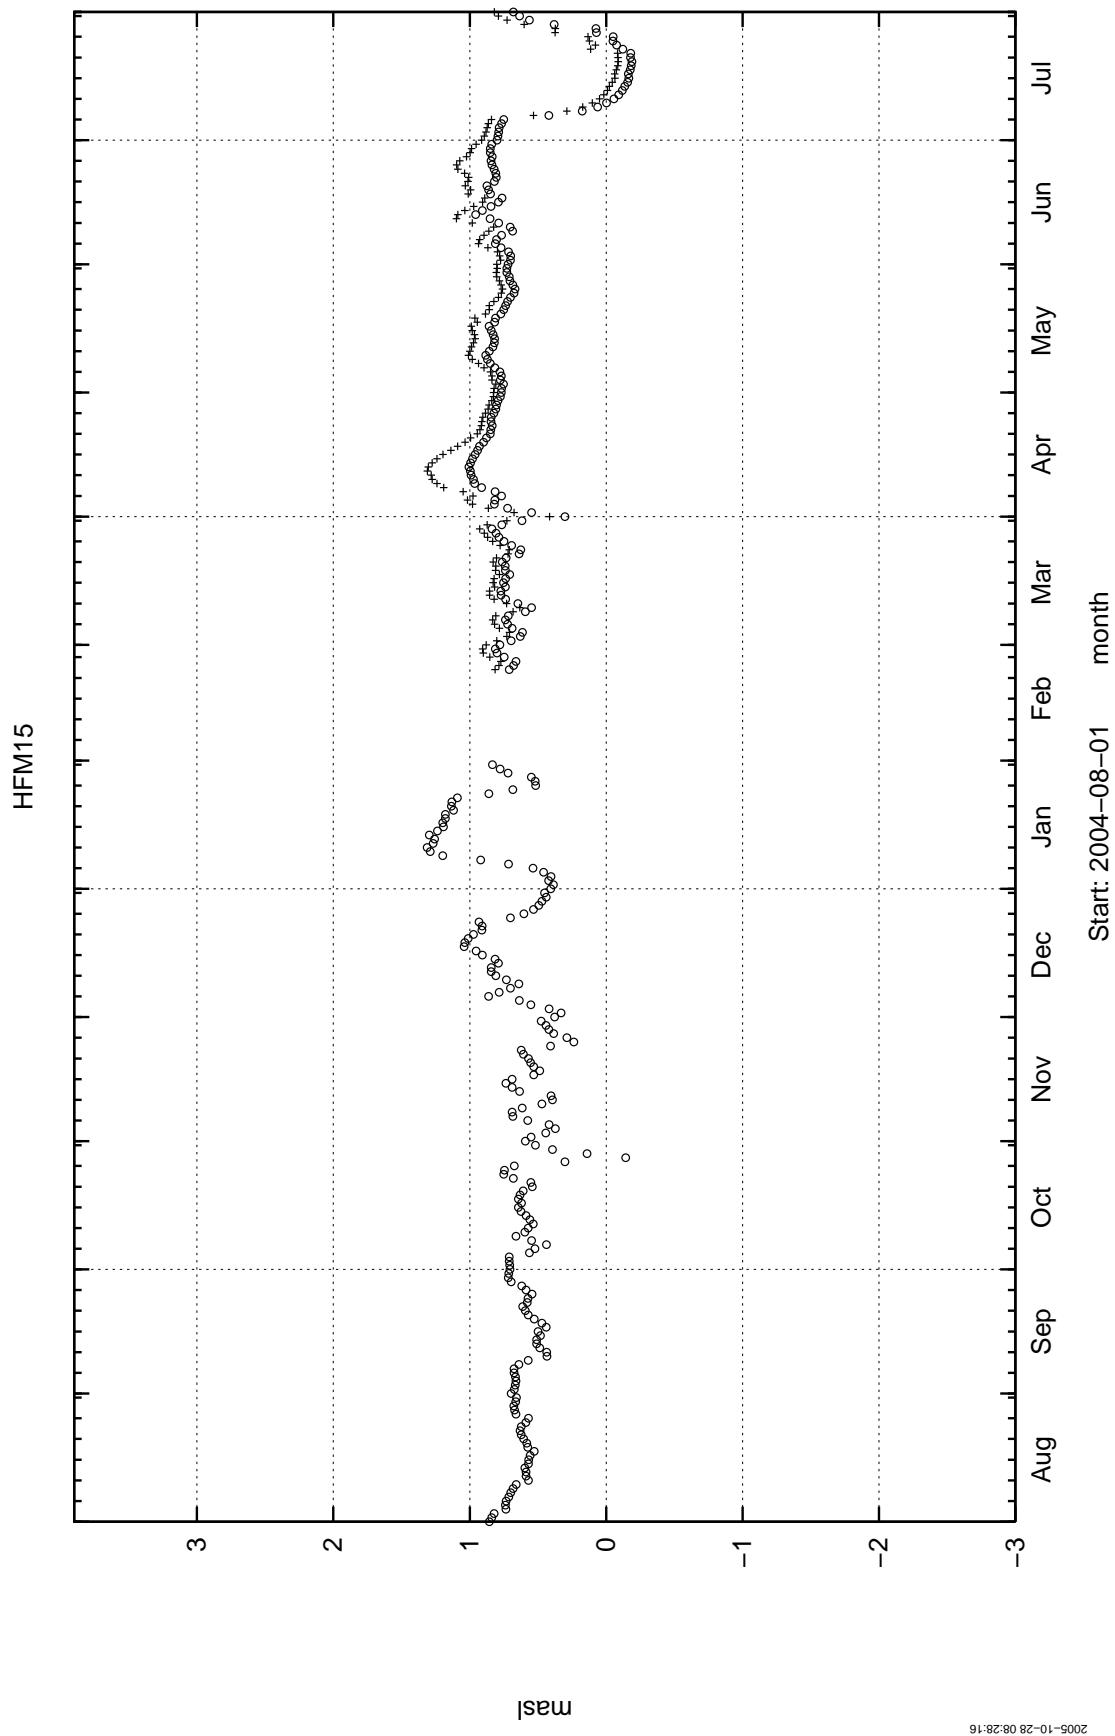

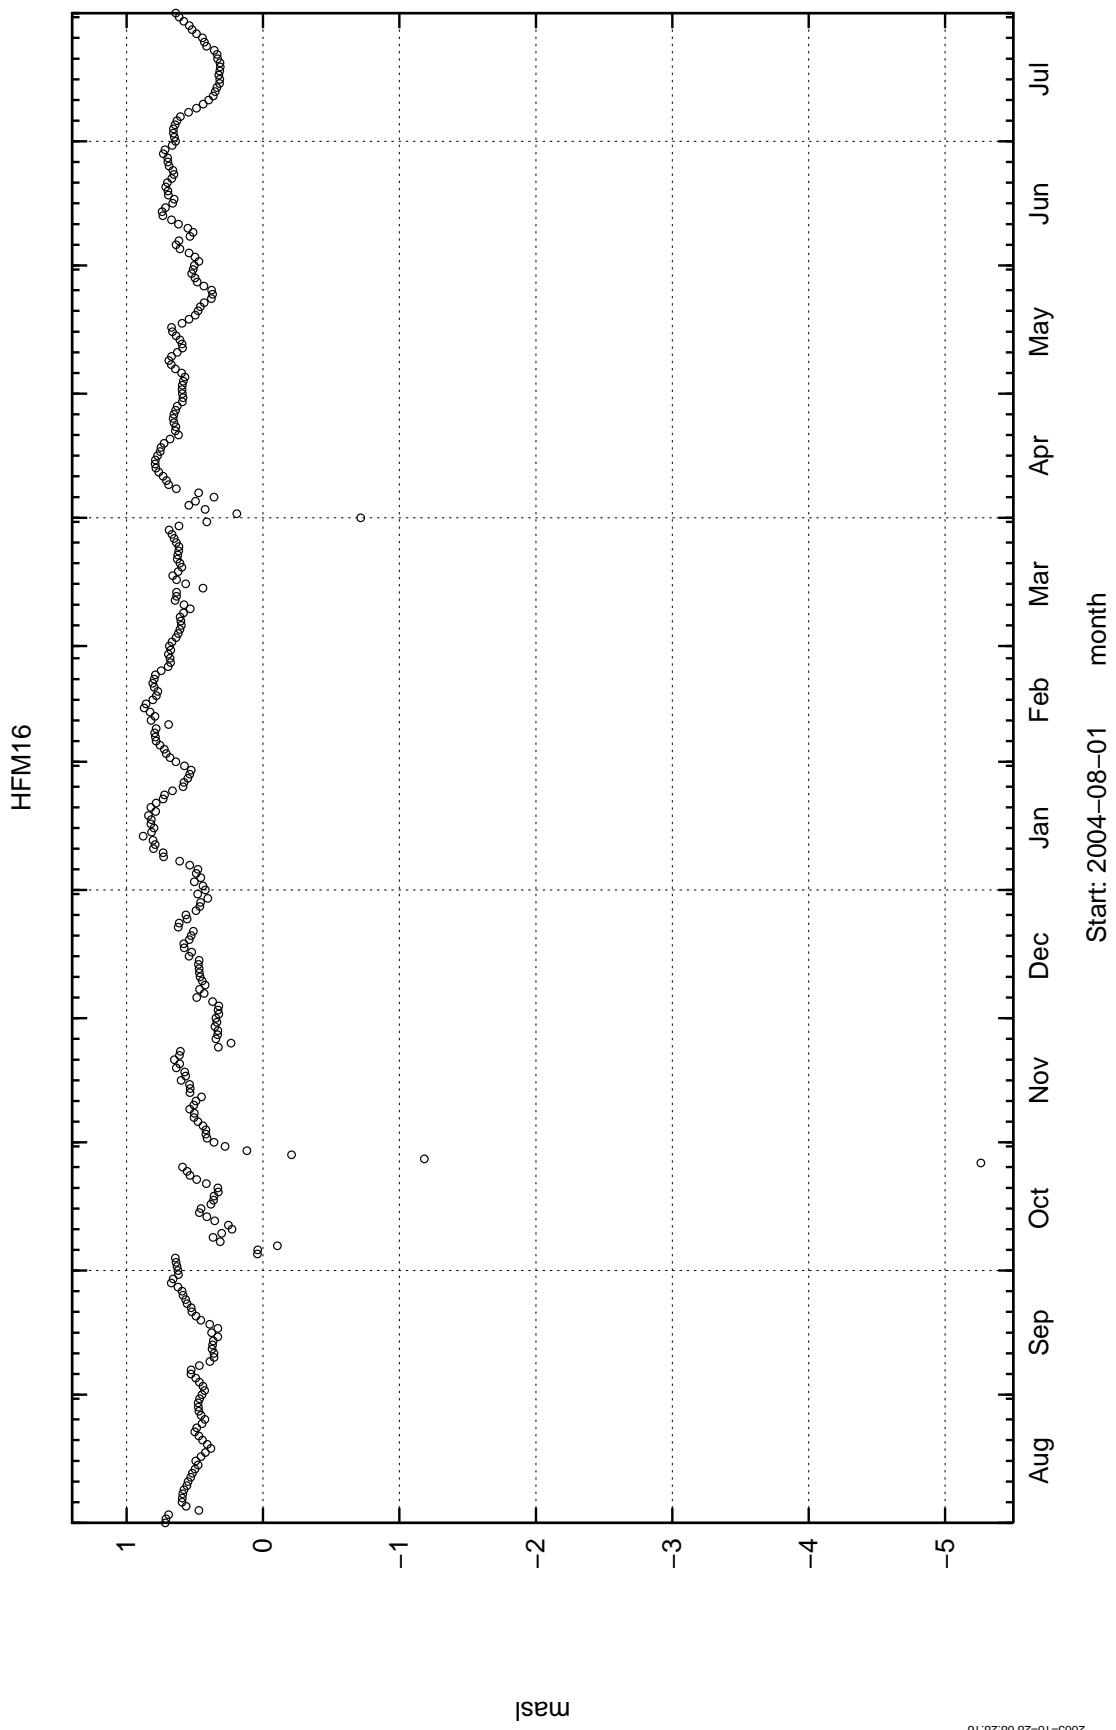


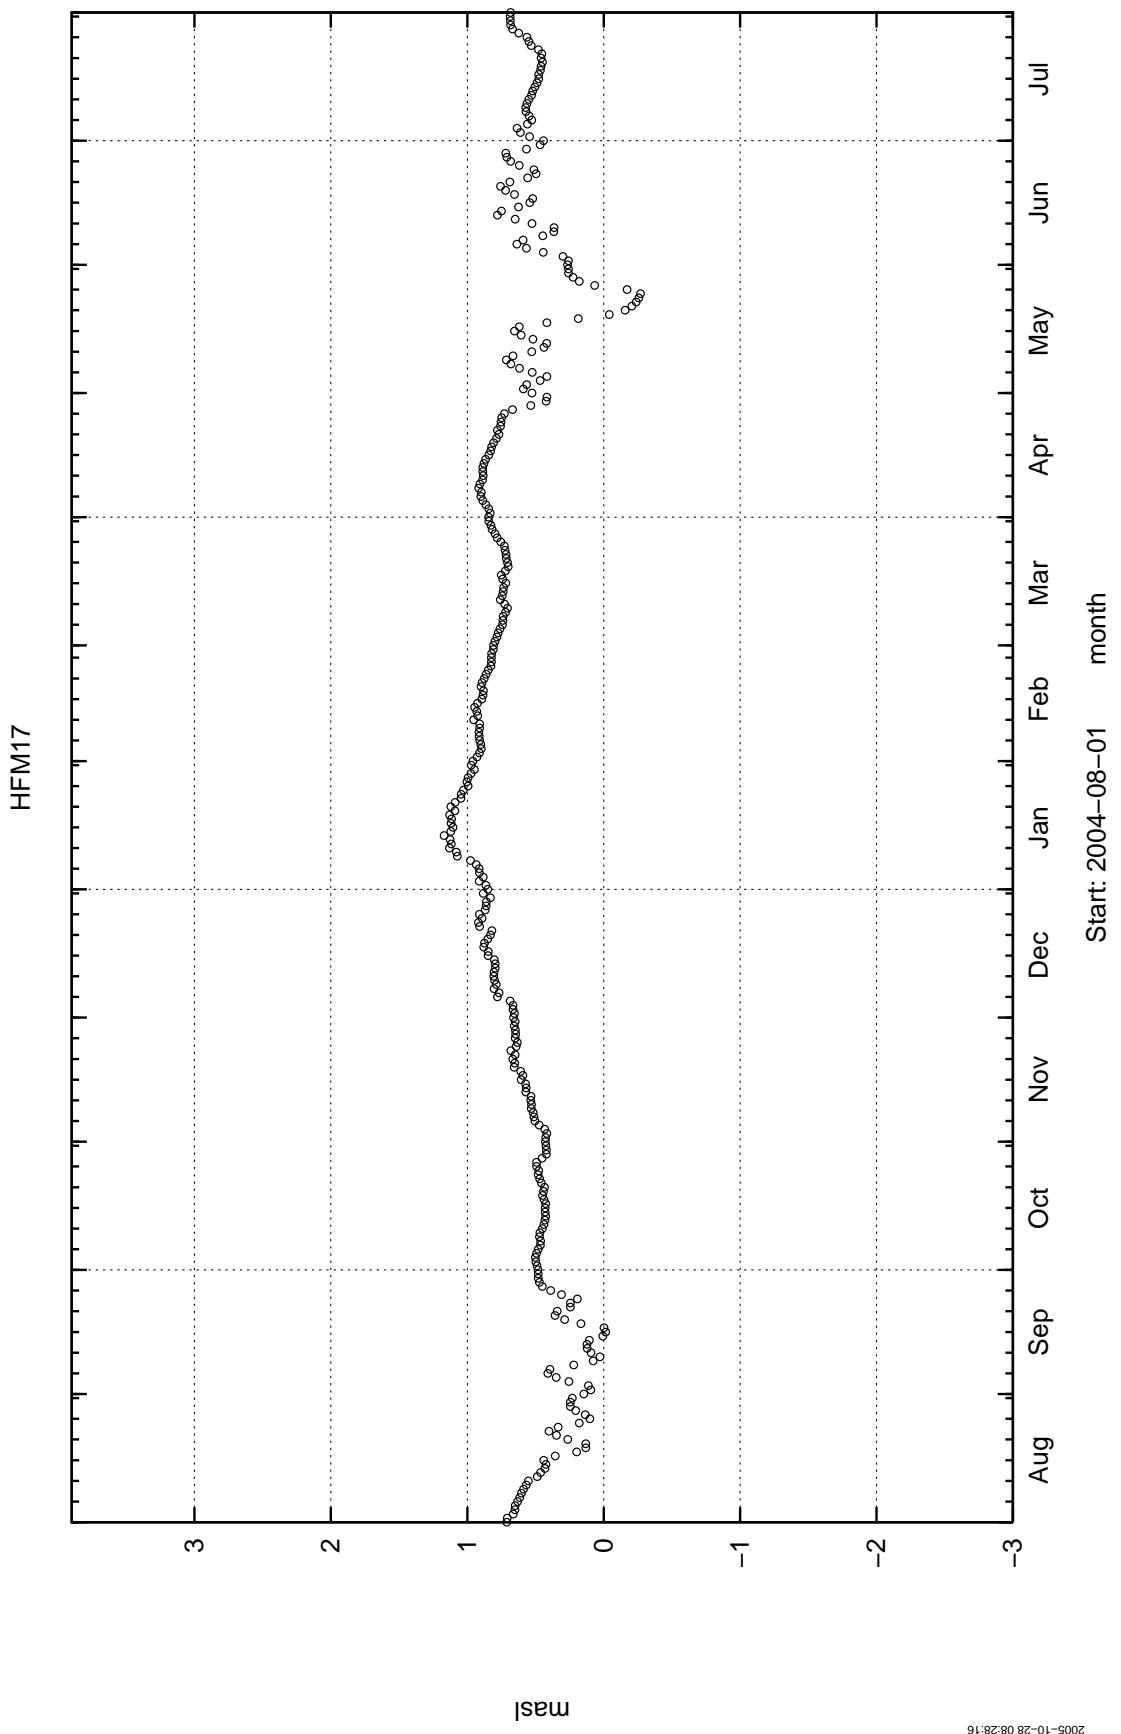


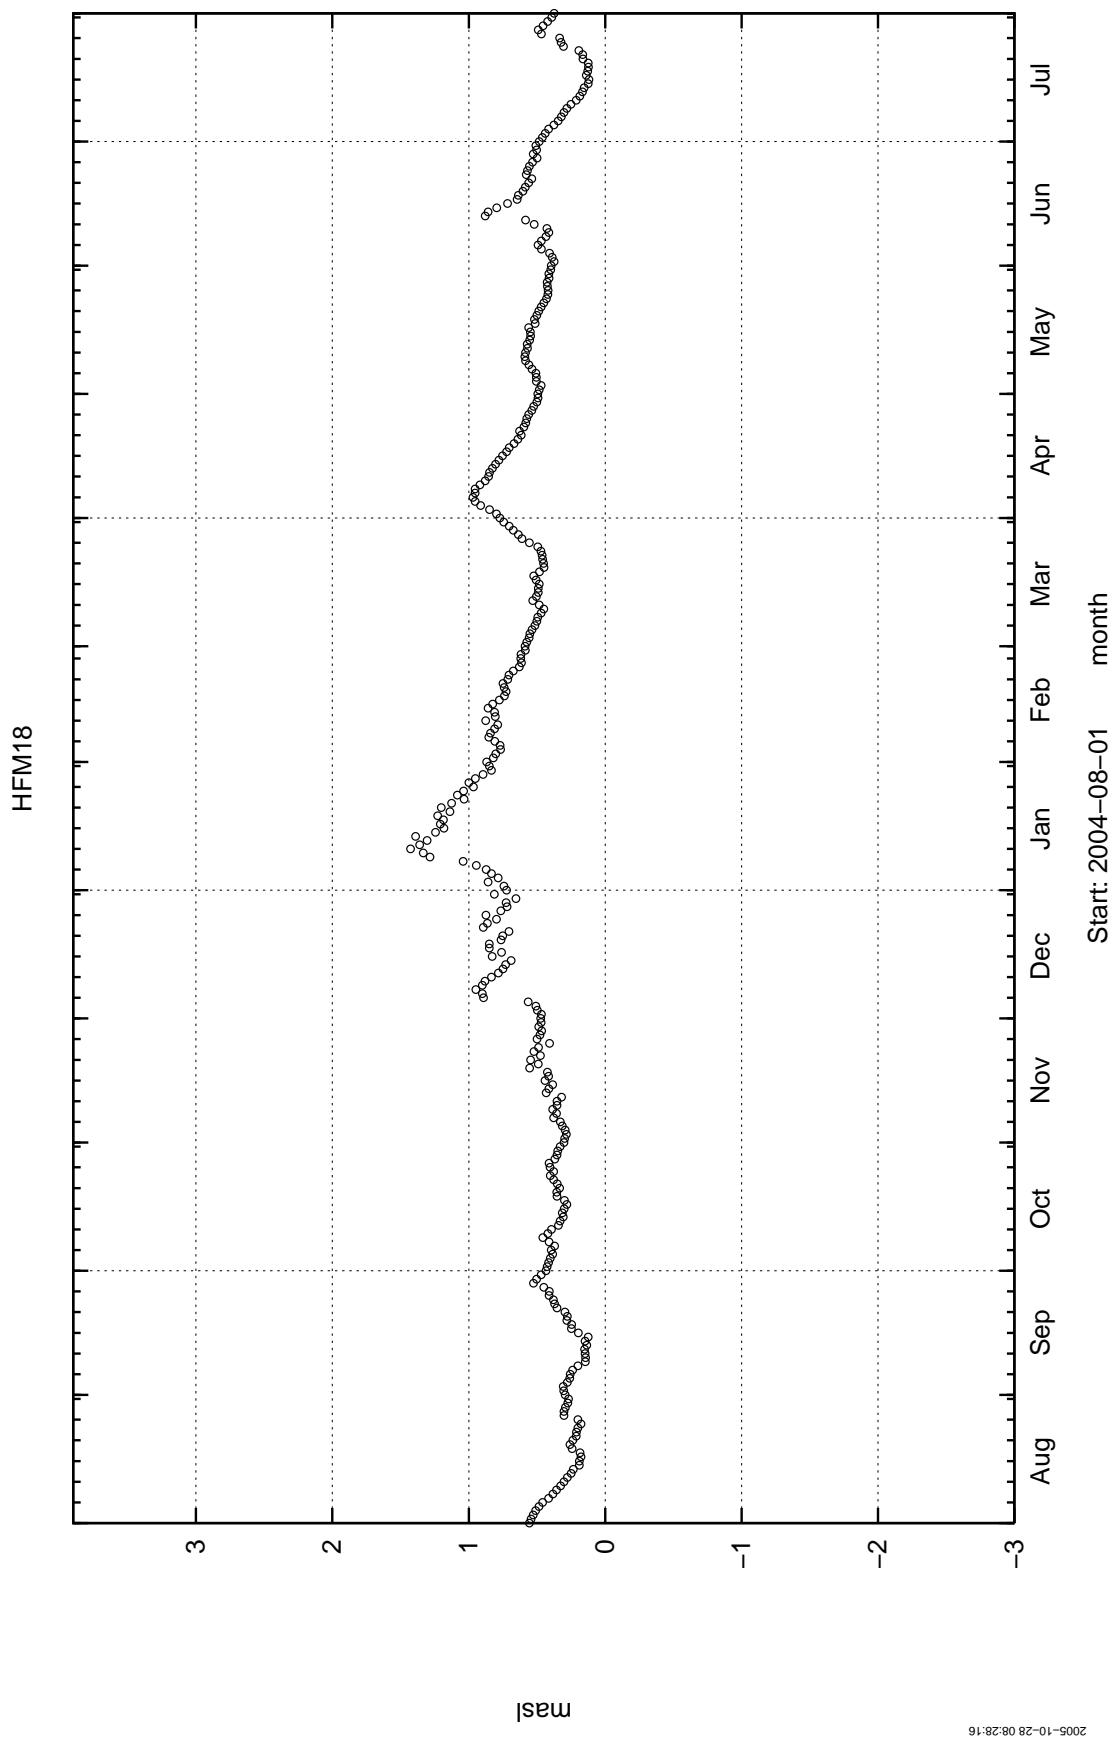


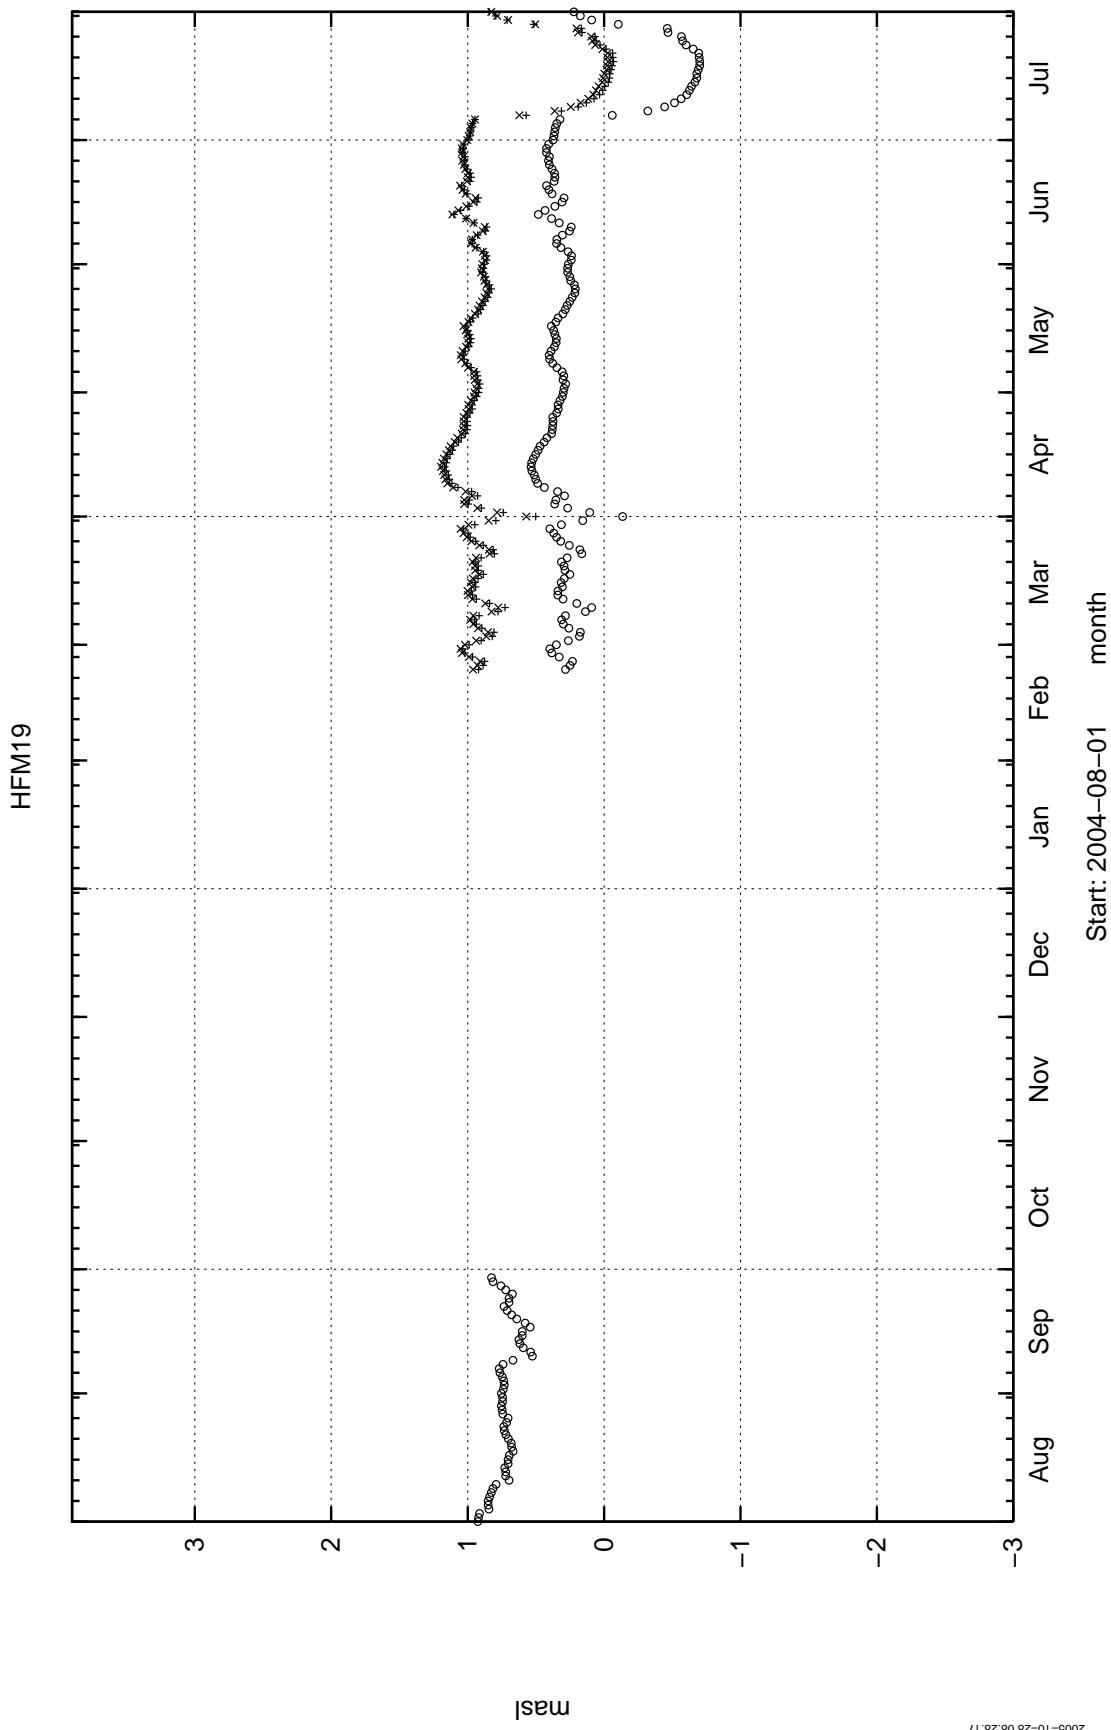


2005-10-28 08:28:17

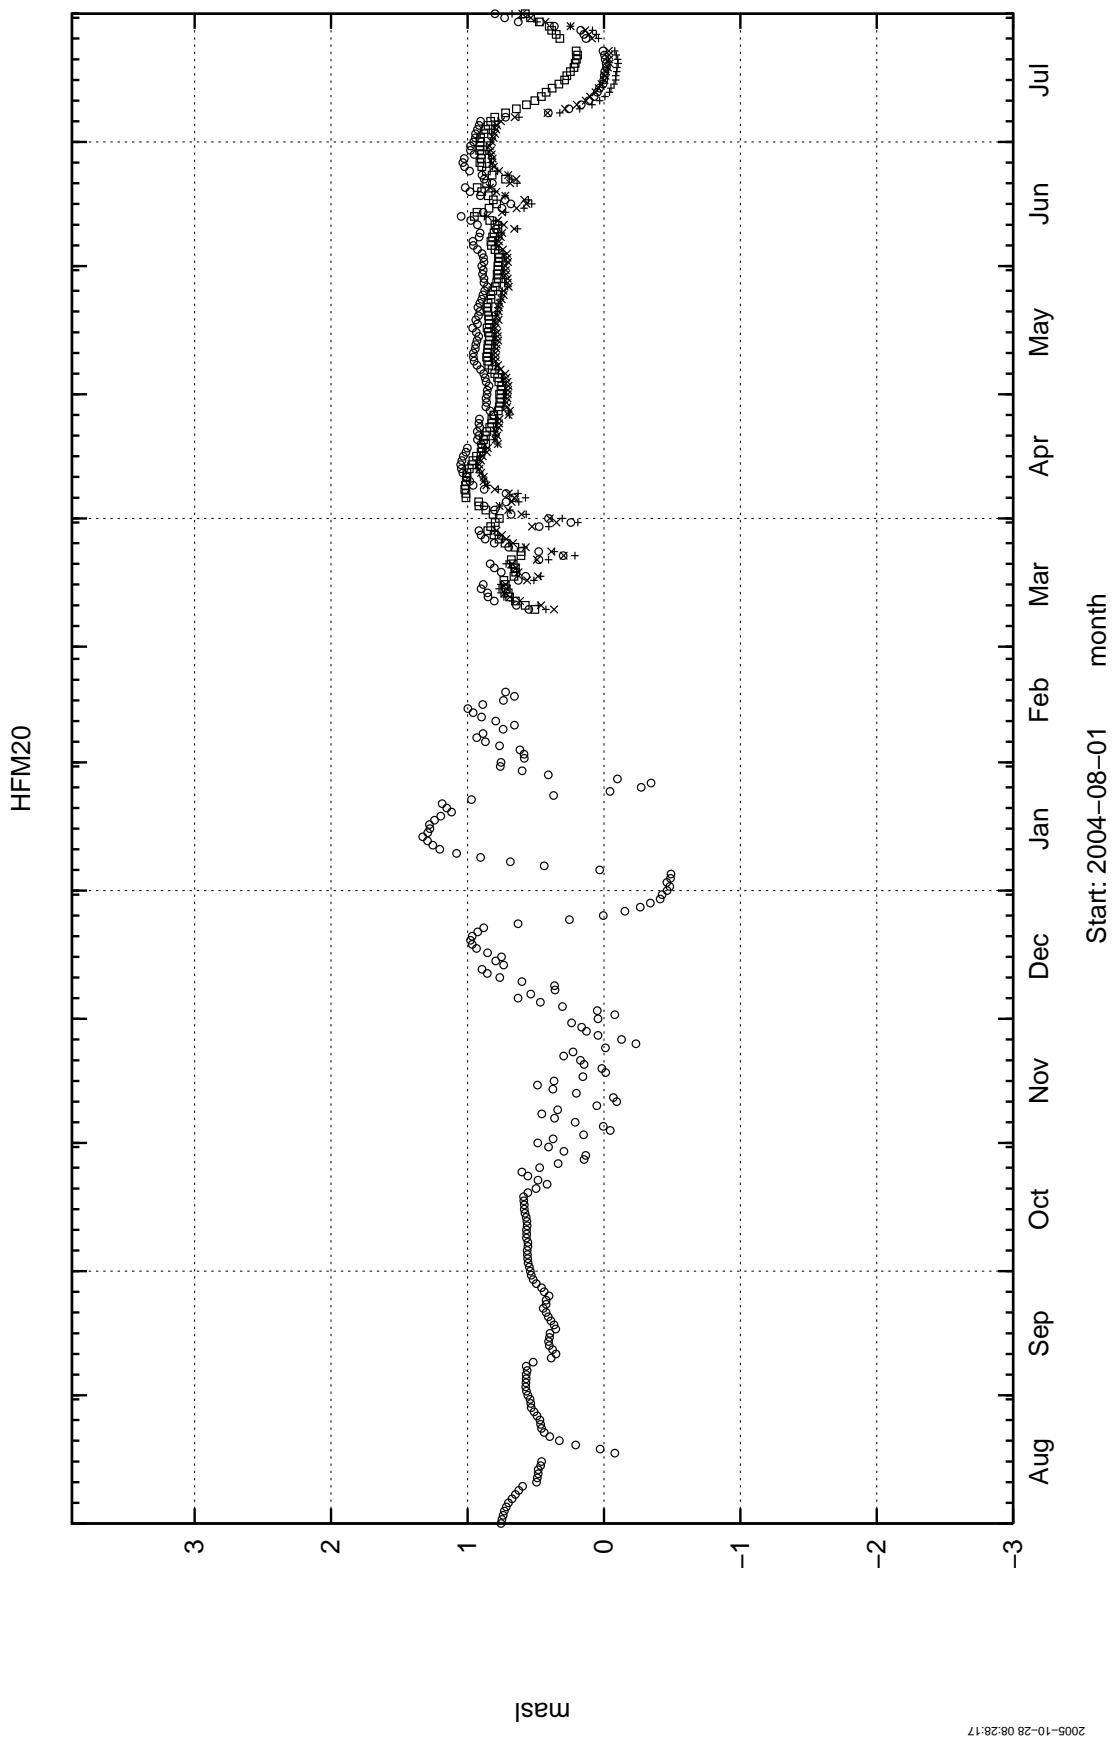


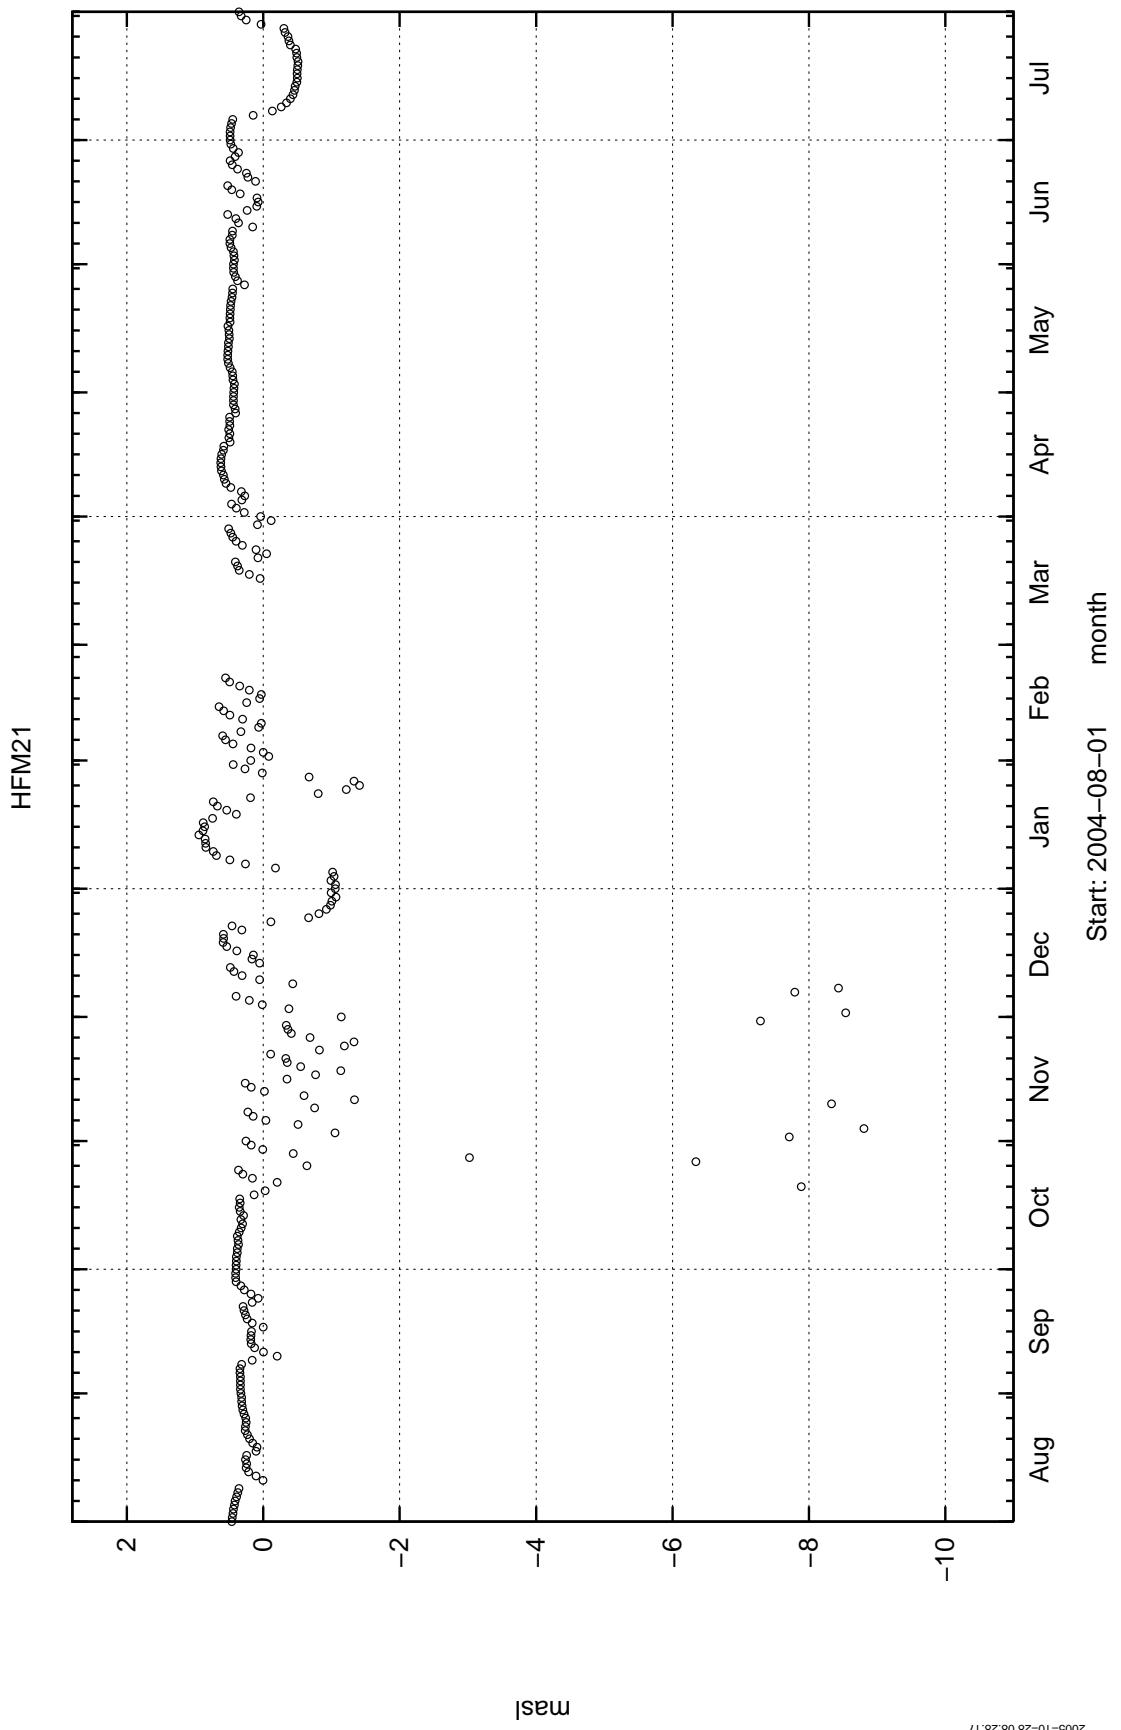


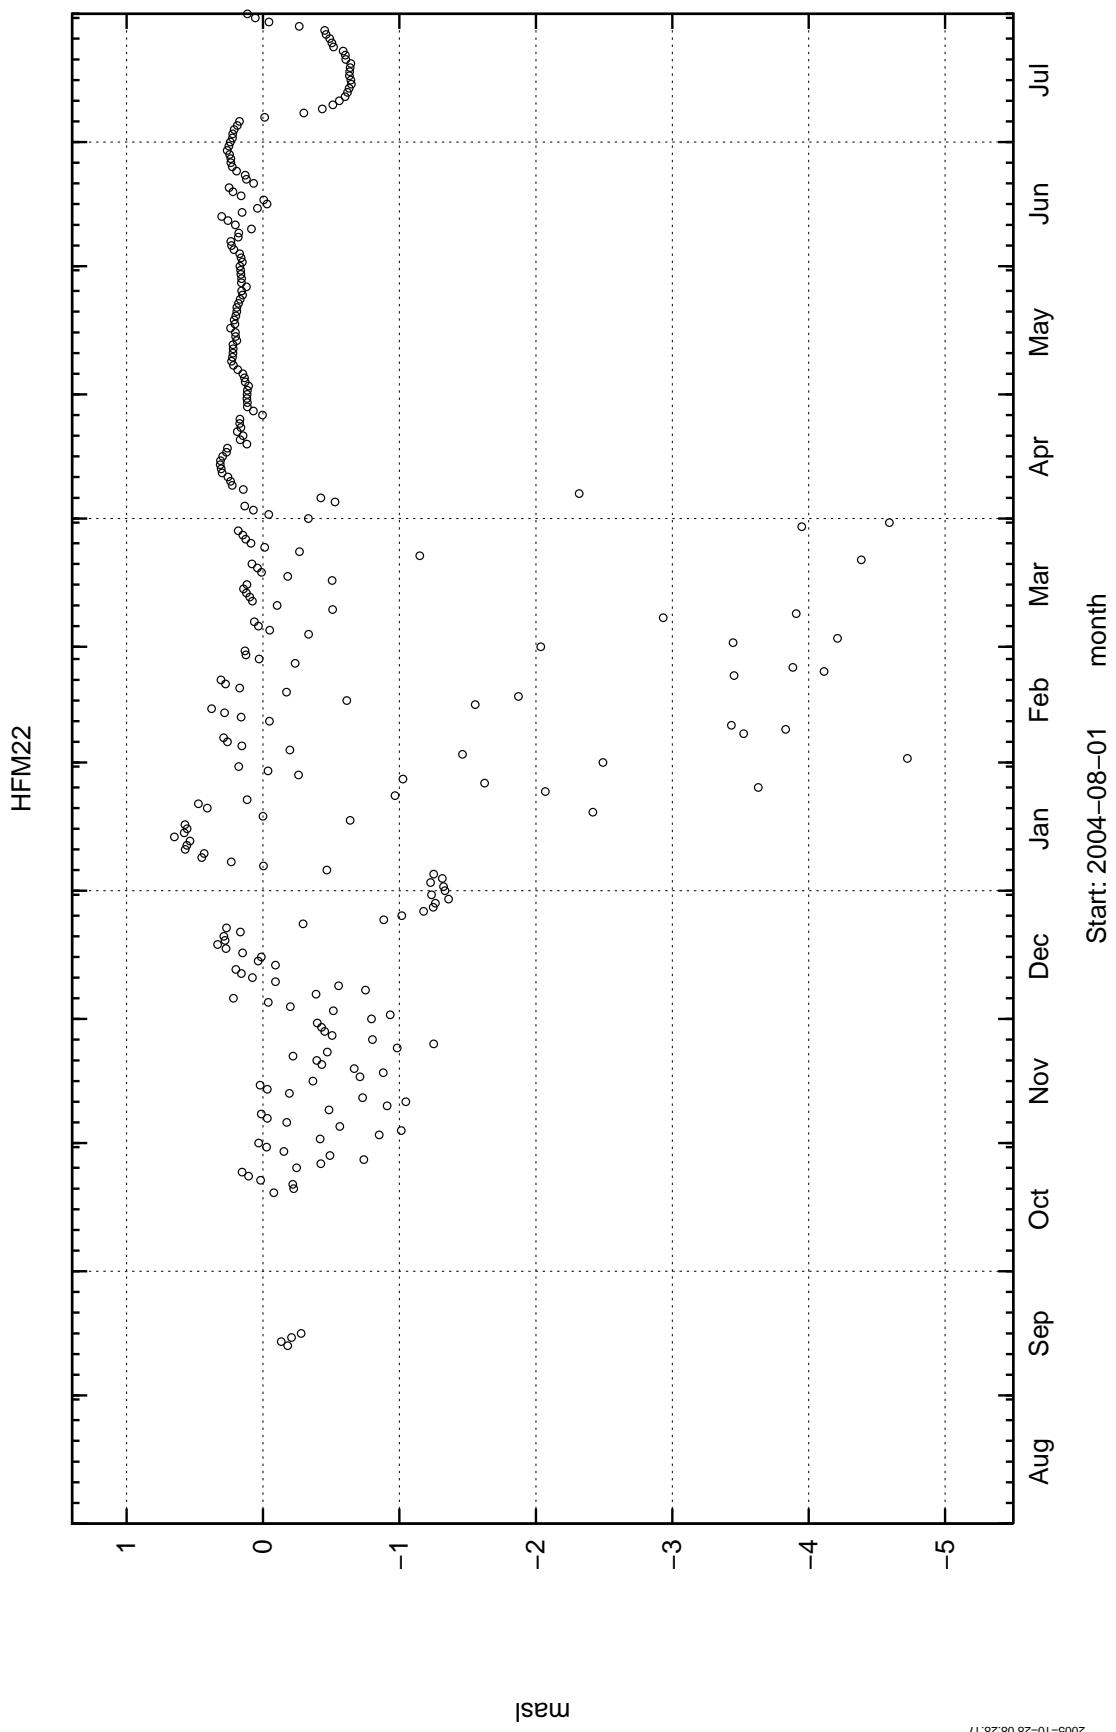

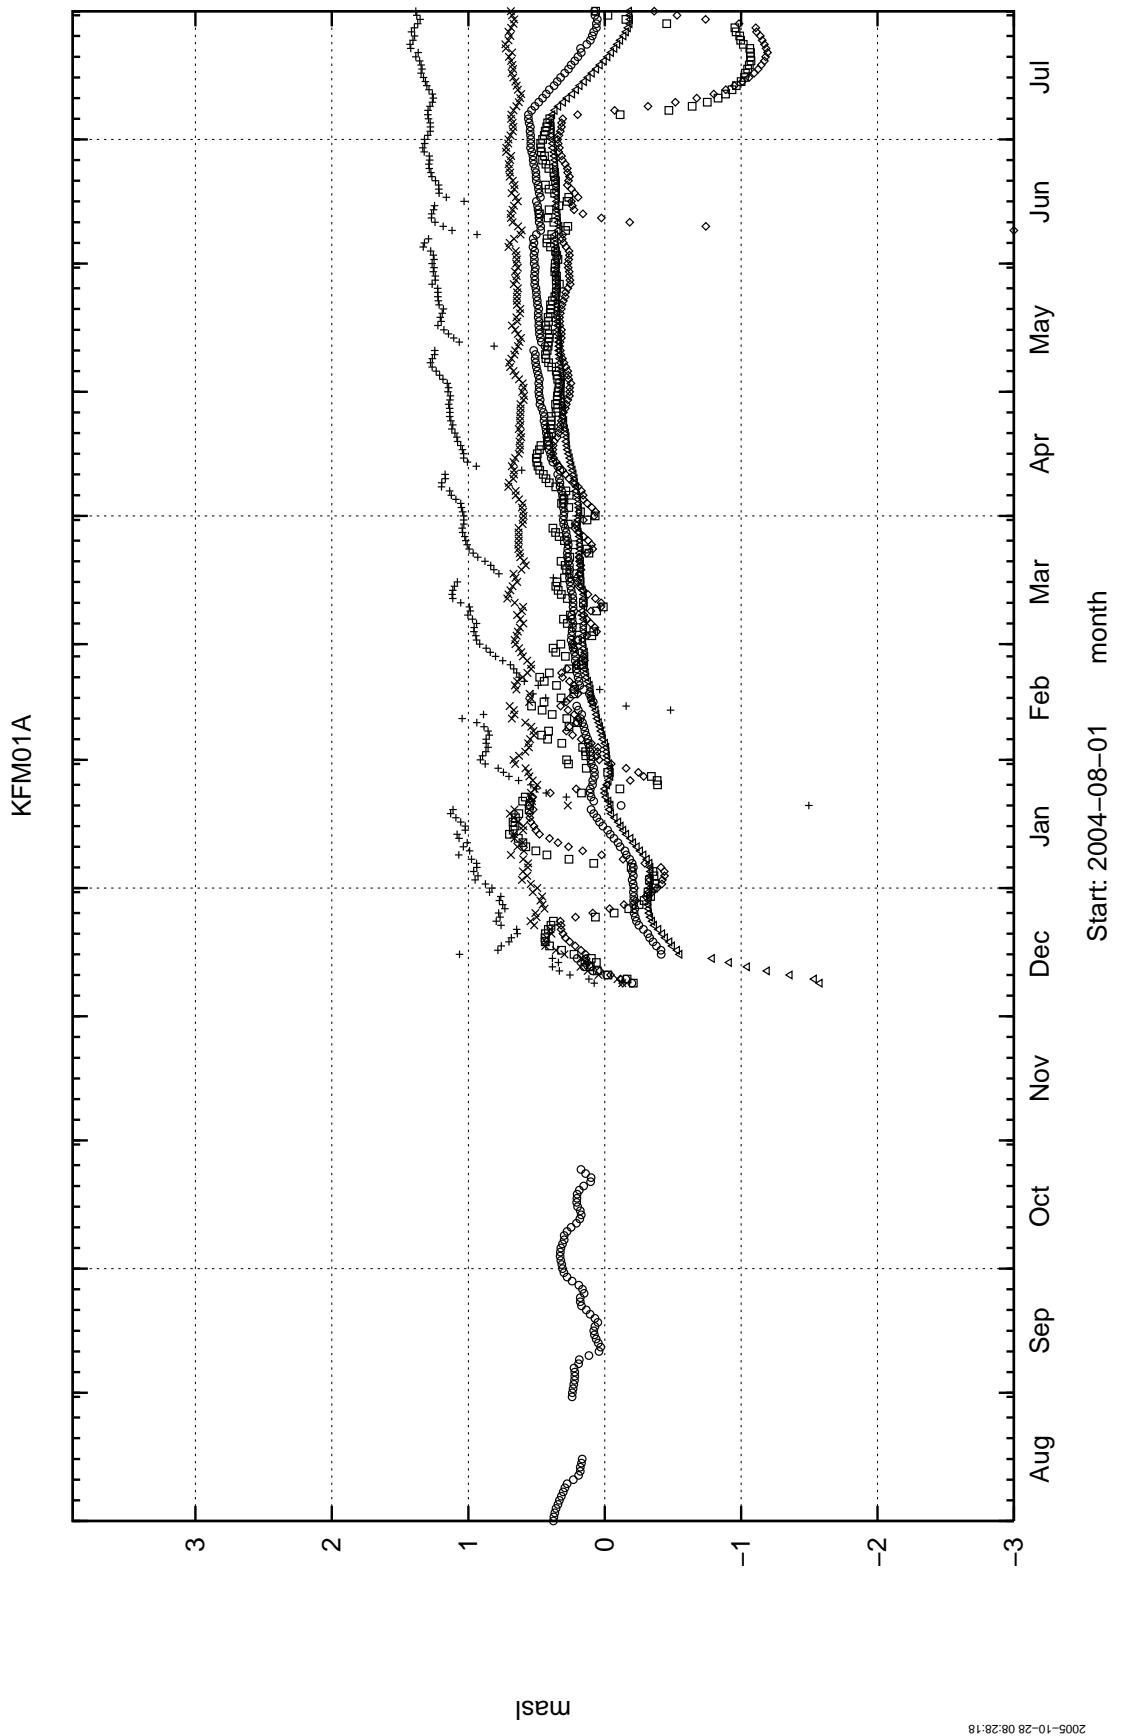



KFM01B

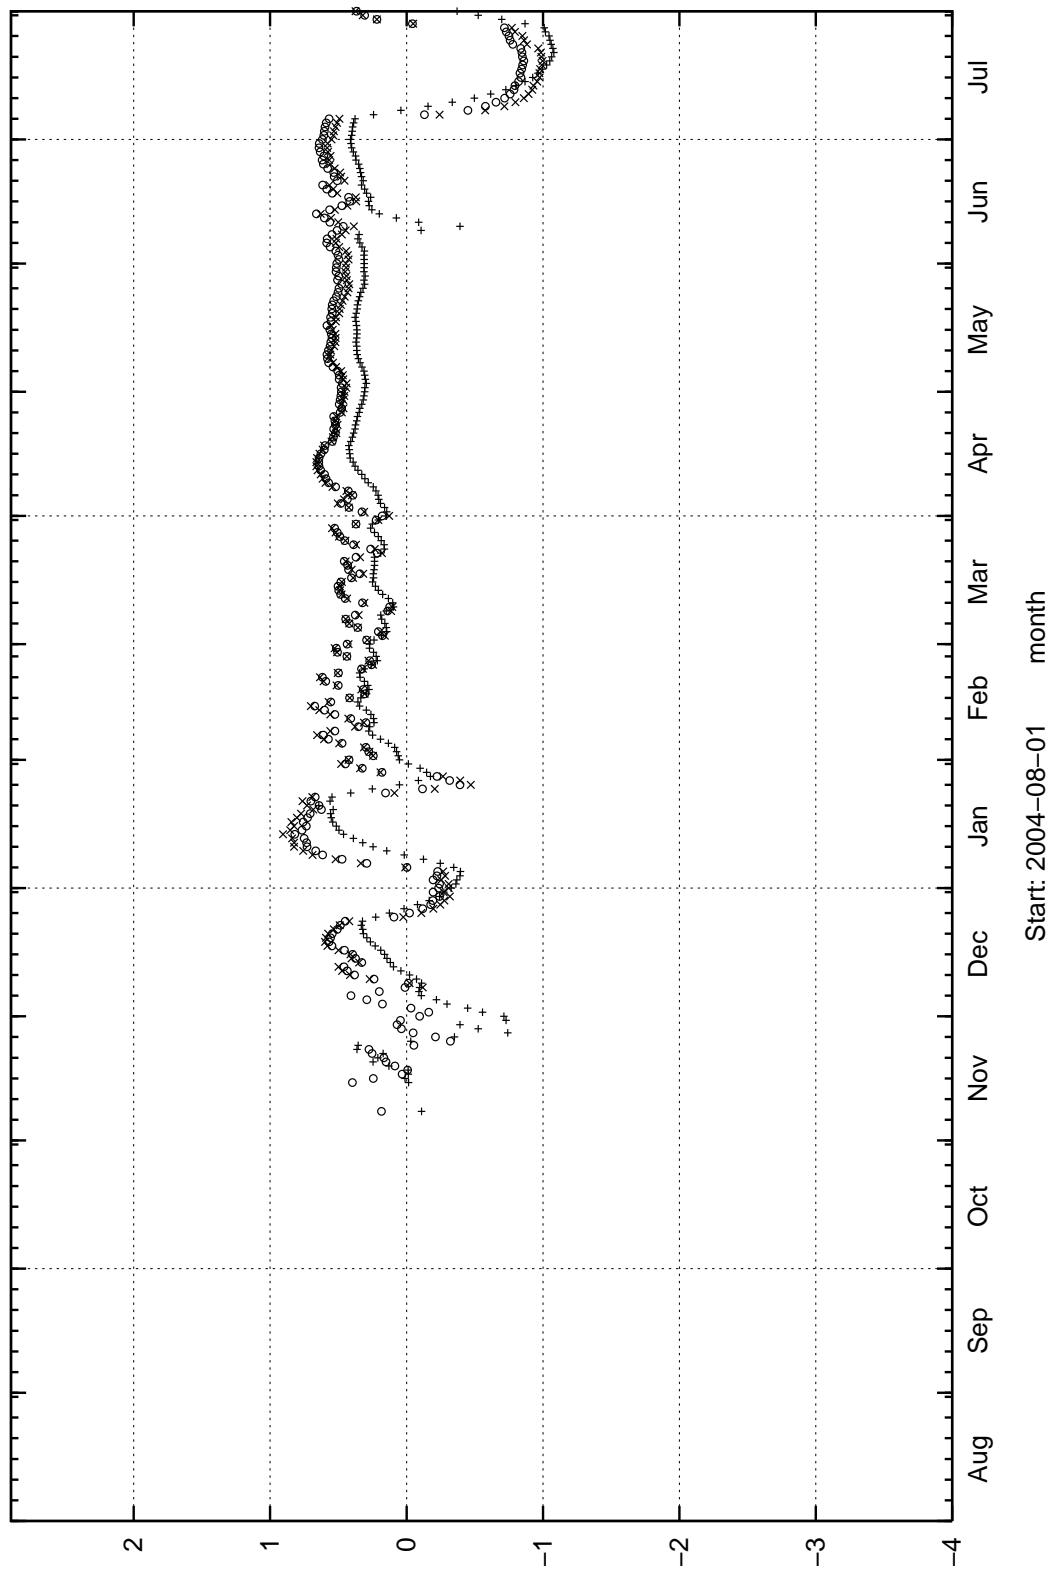

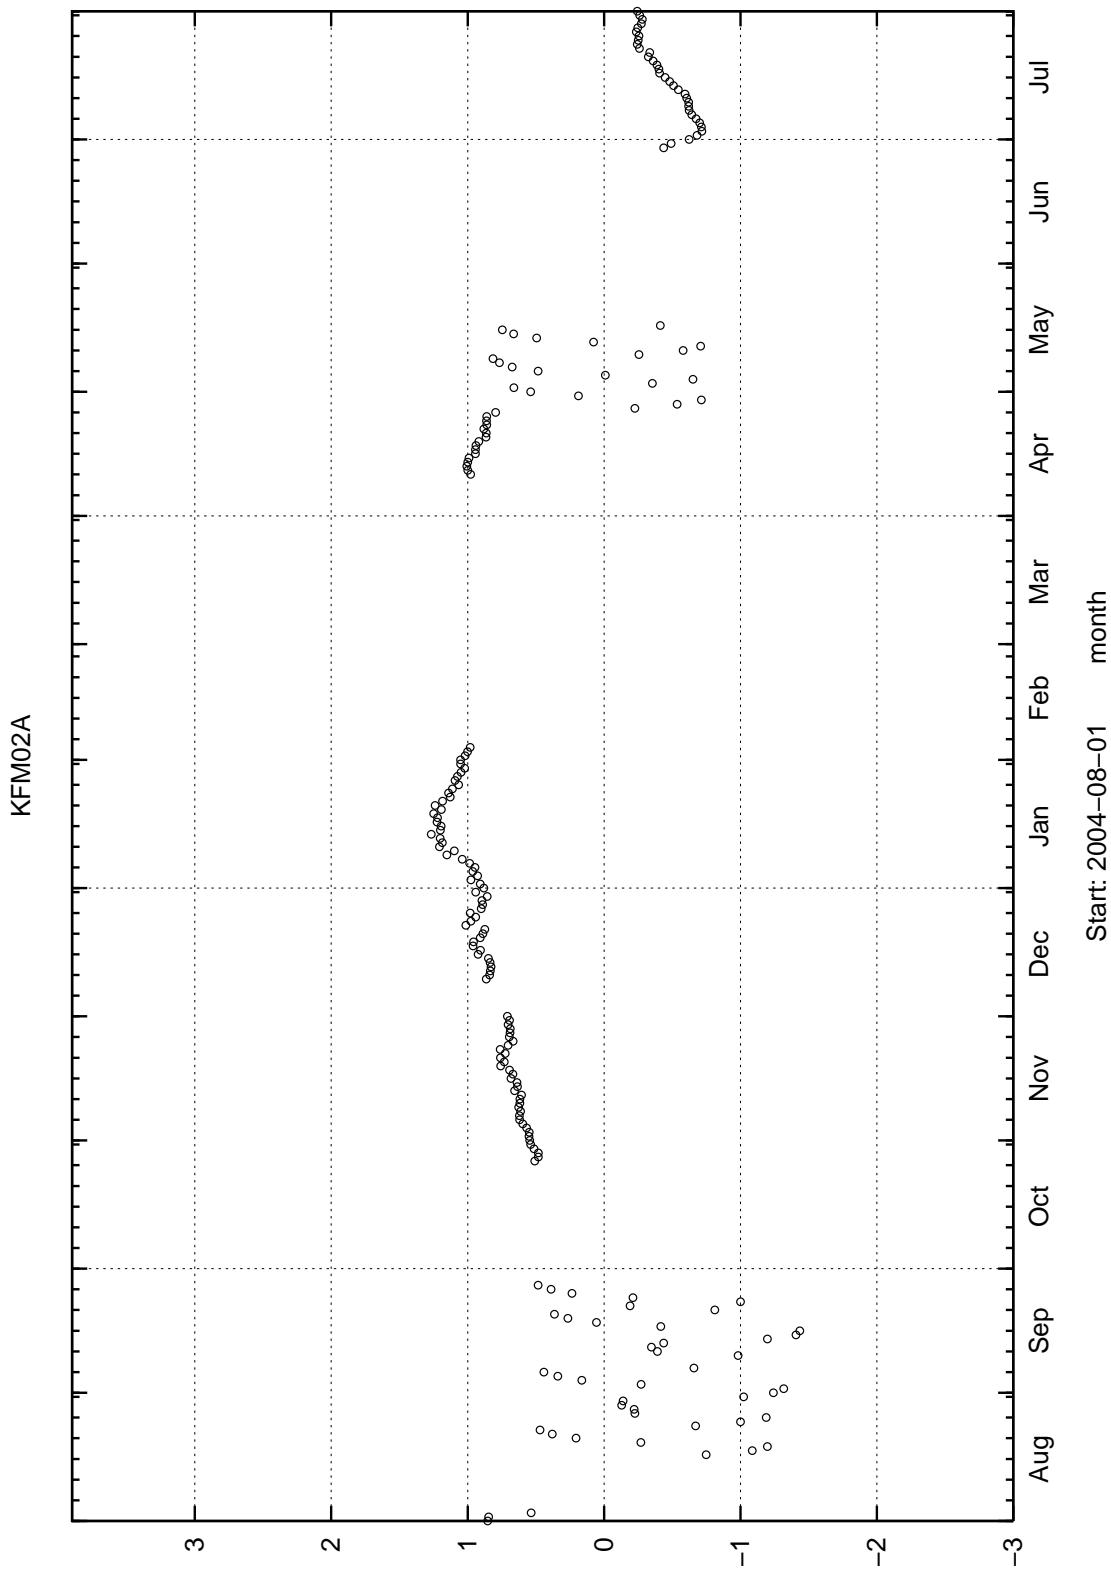


2005-10-26 08:26:18

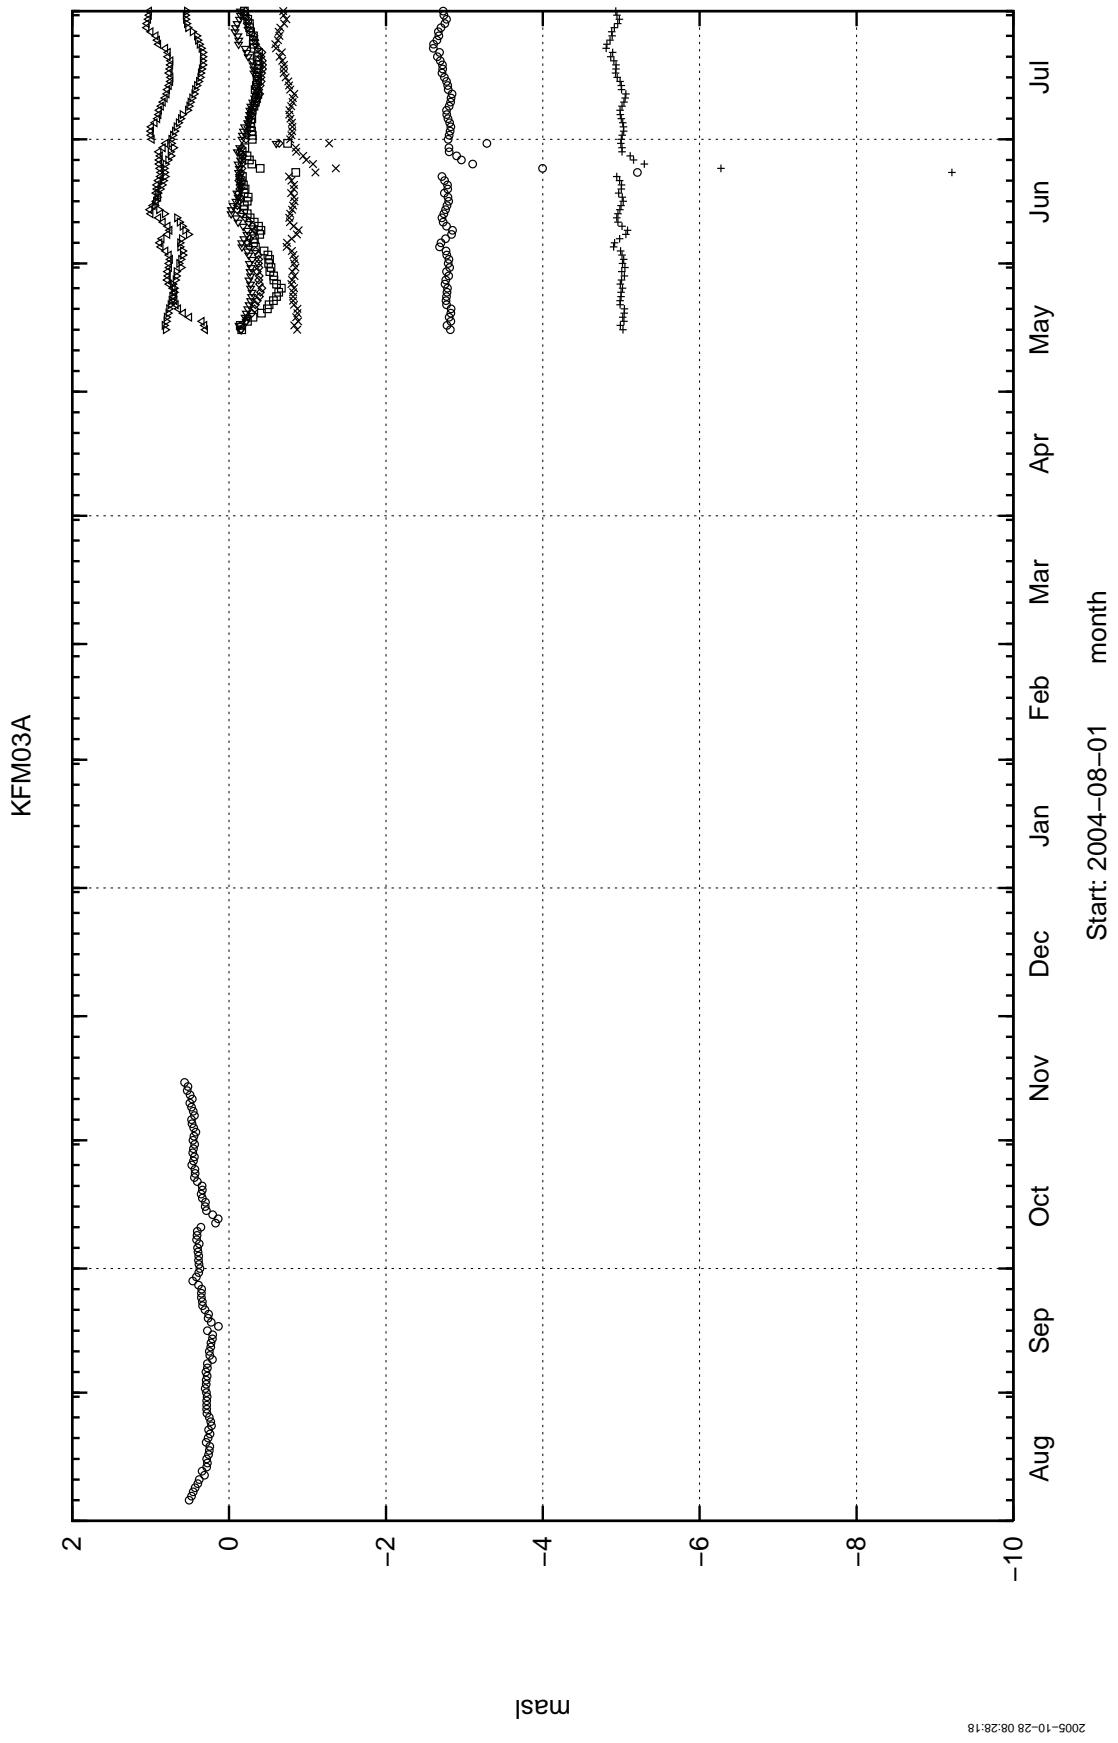


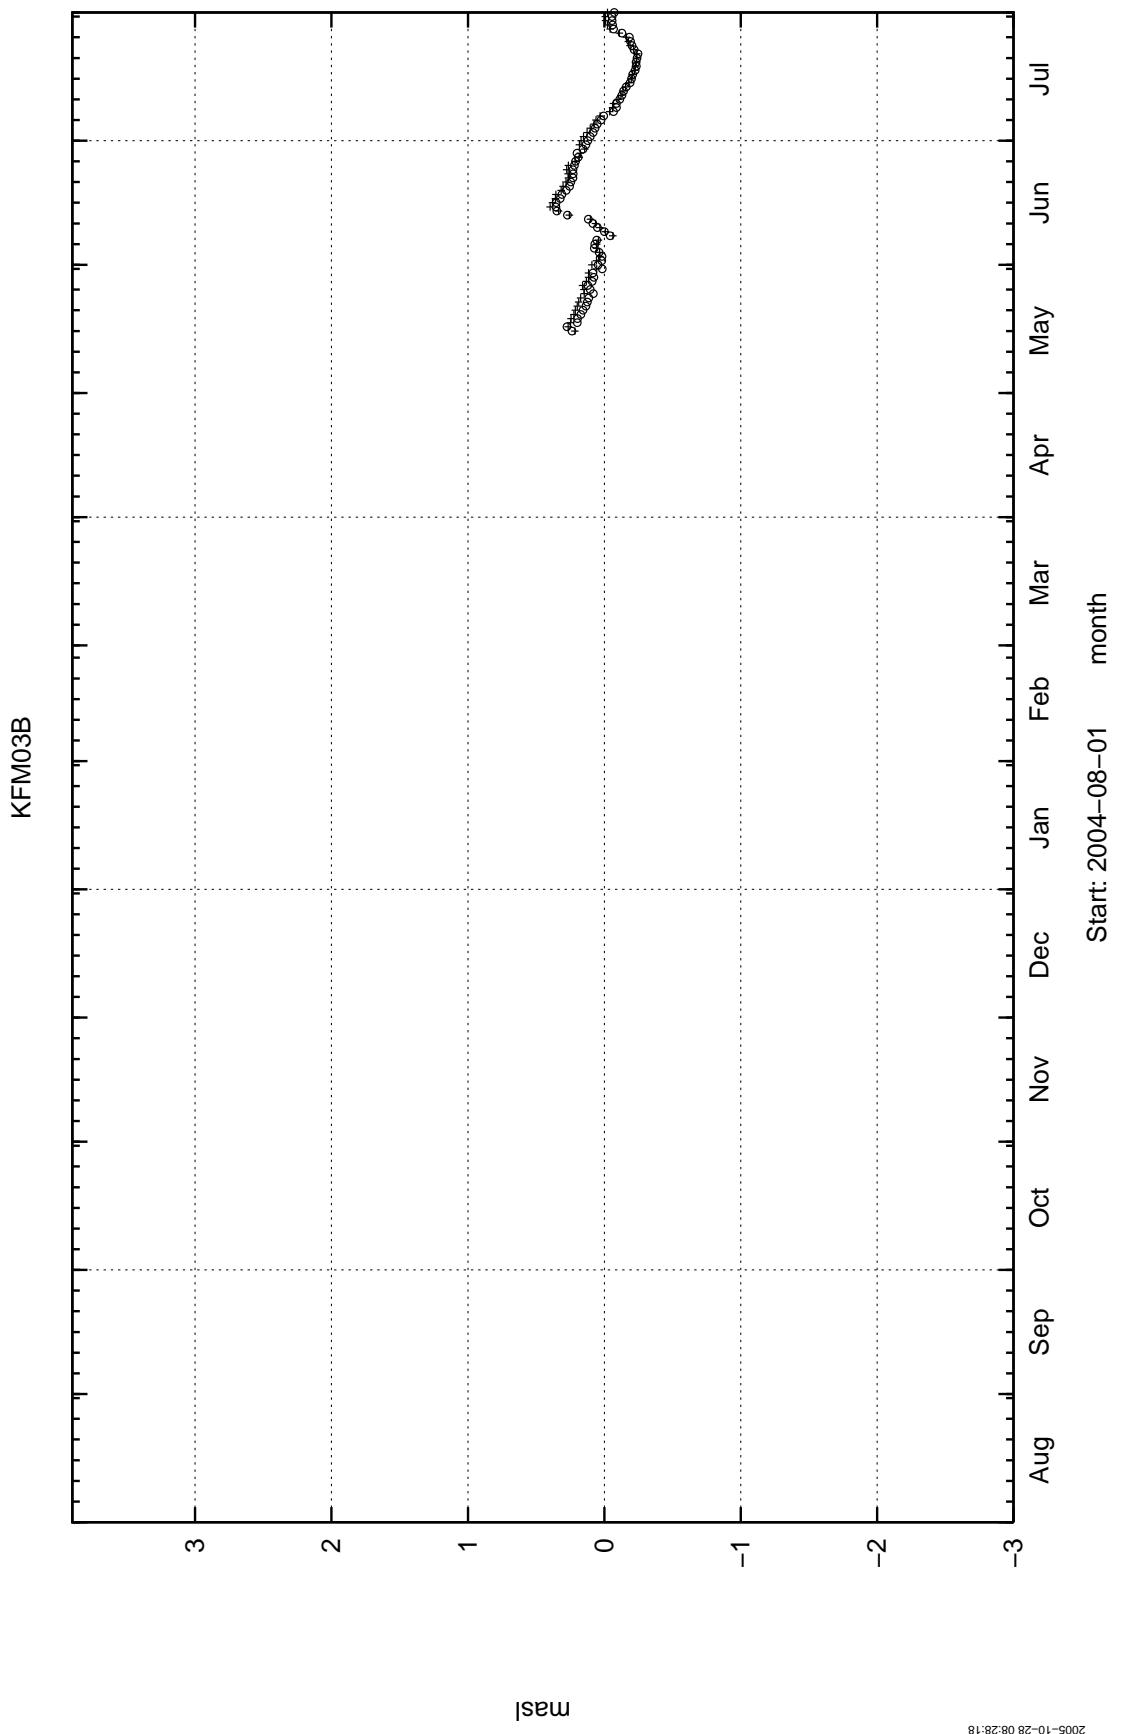


2005-10-28 08:28:18

KFM04A

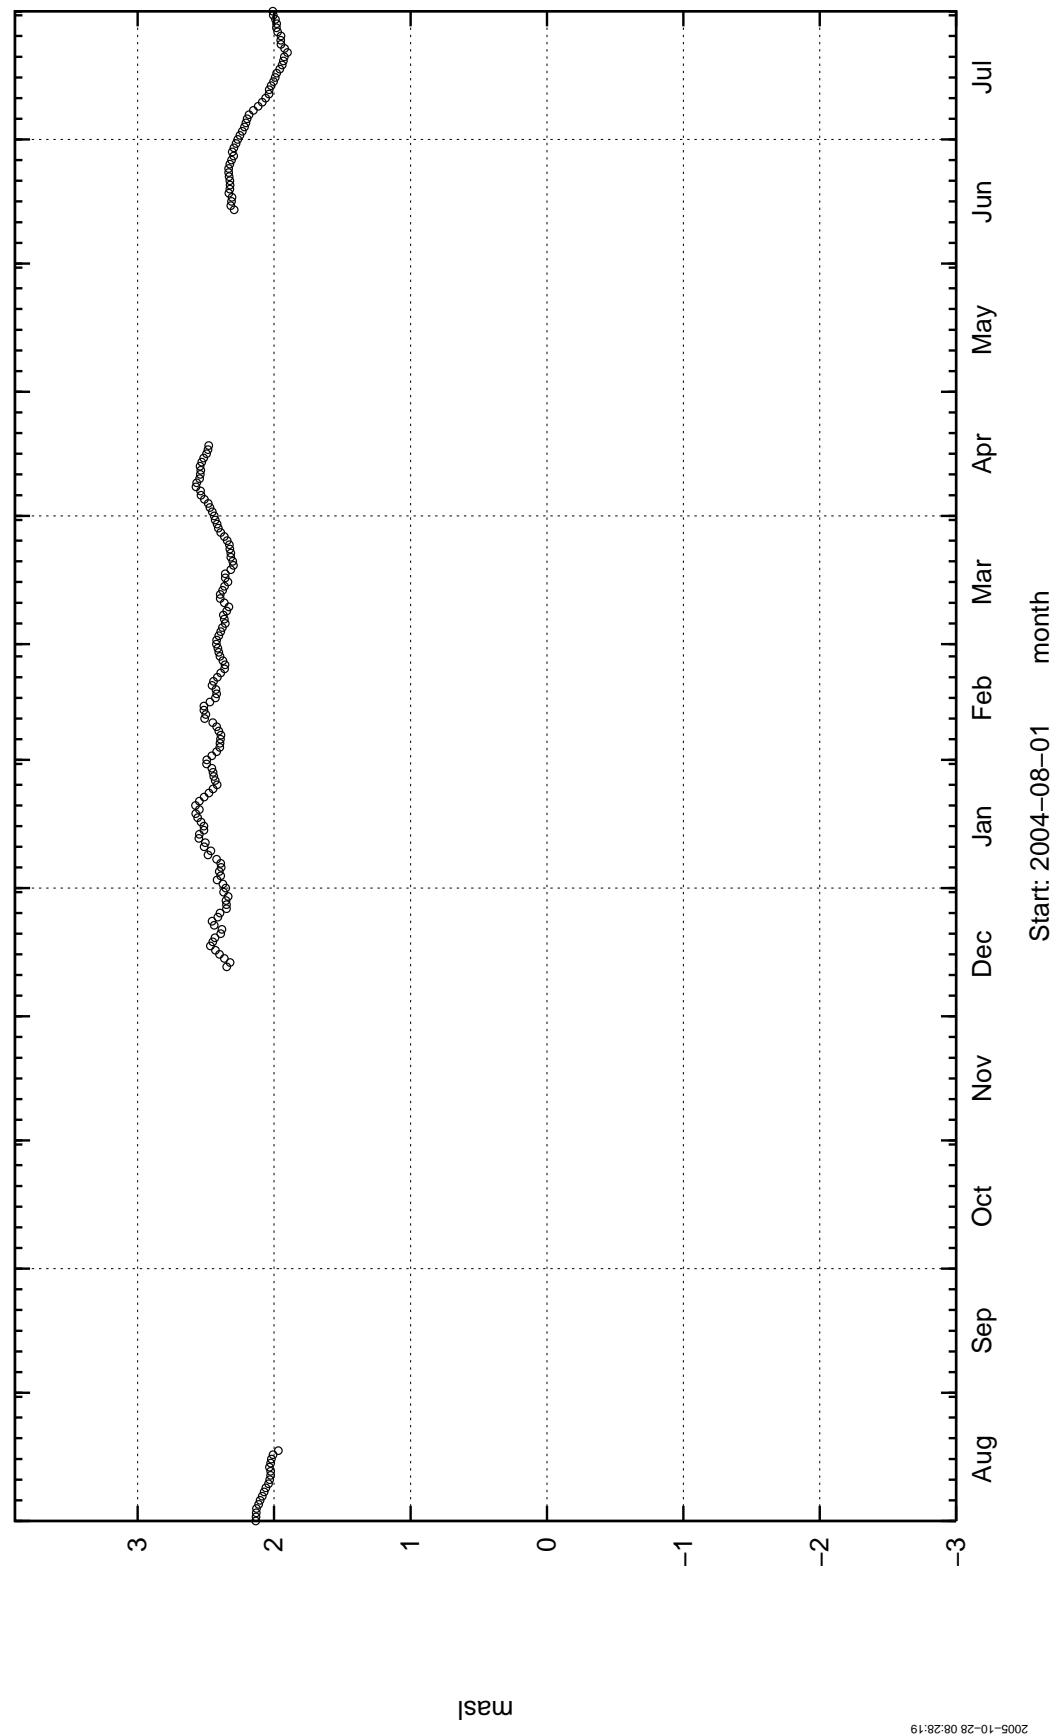


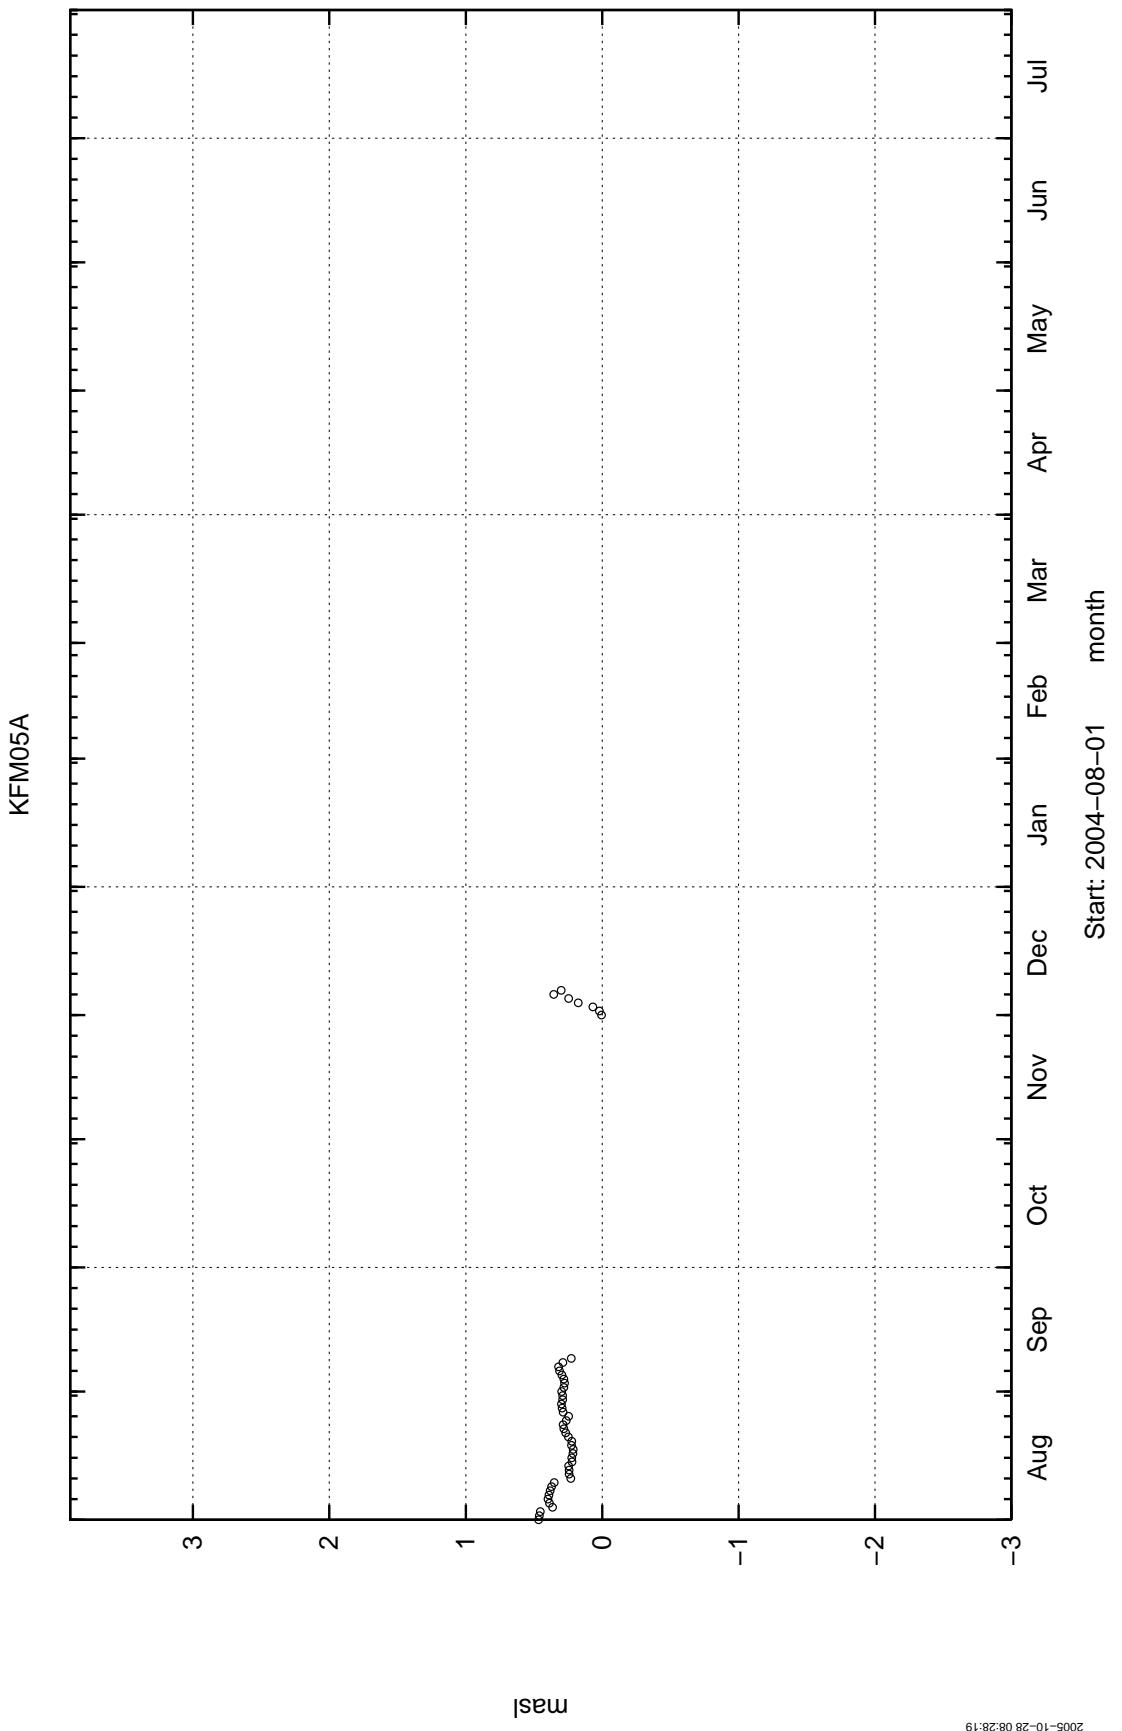

KFM07A

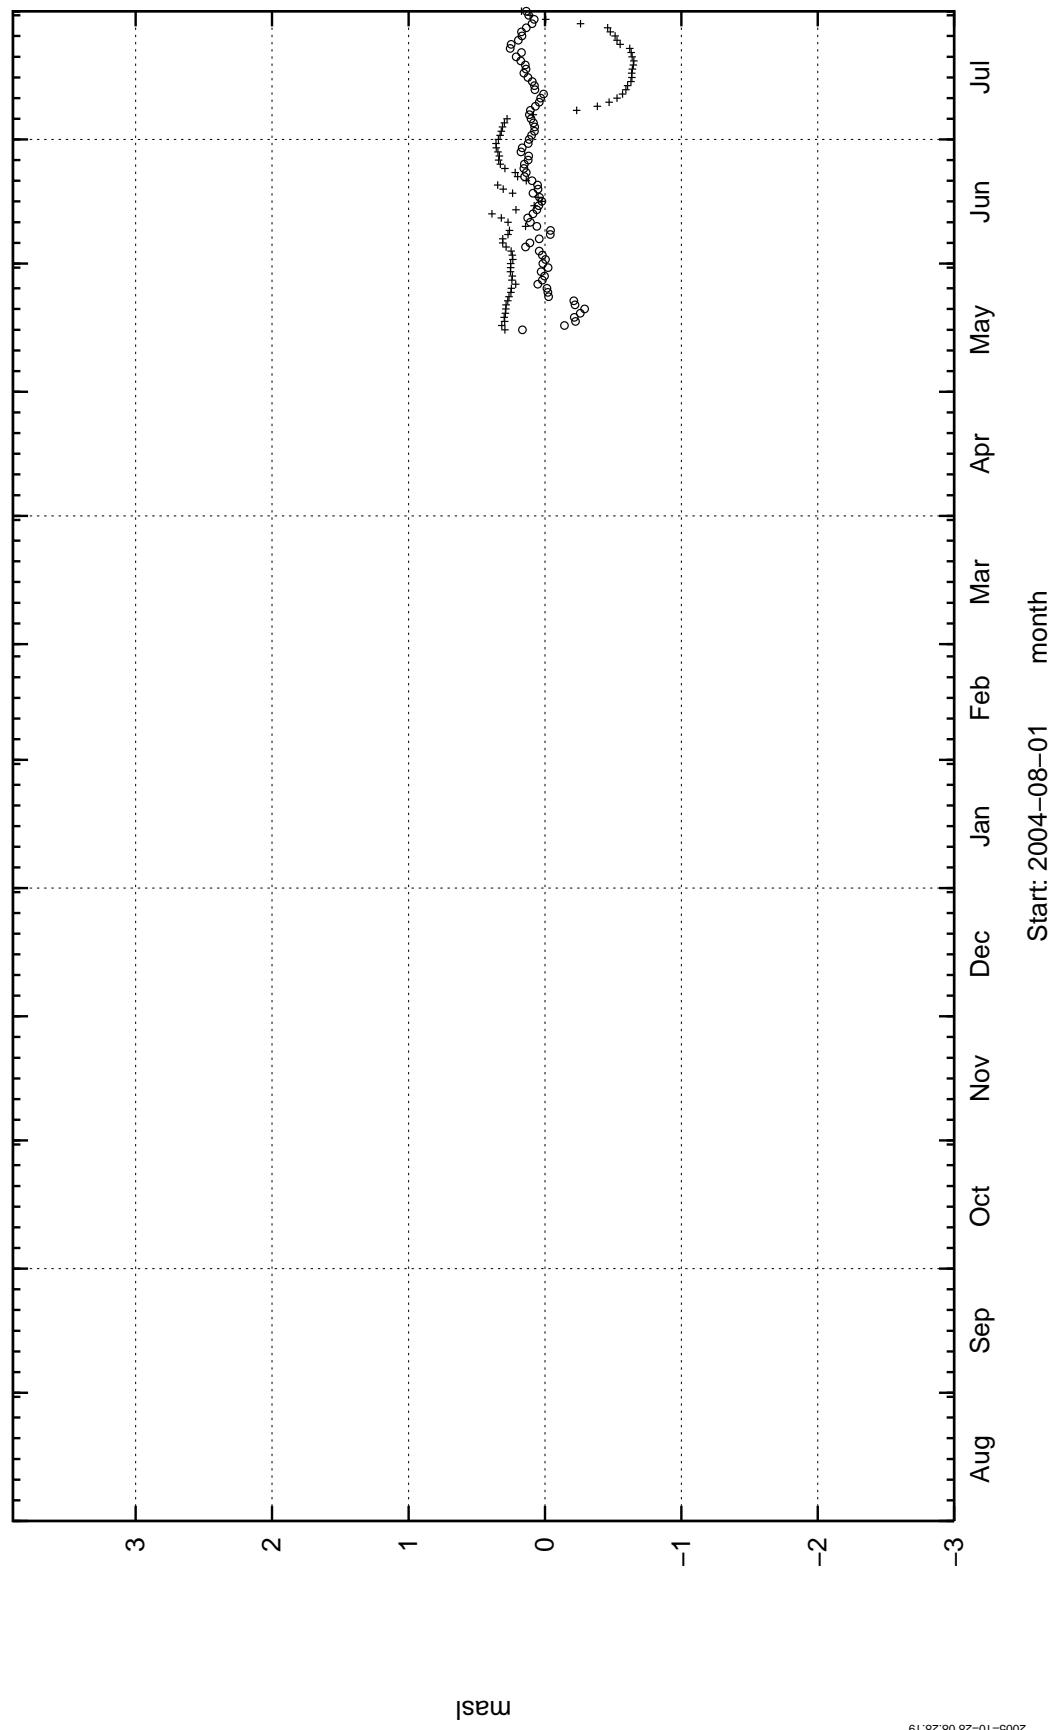


2005-10-26 08:26:19

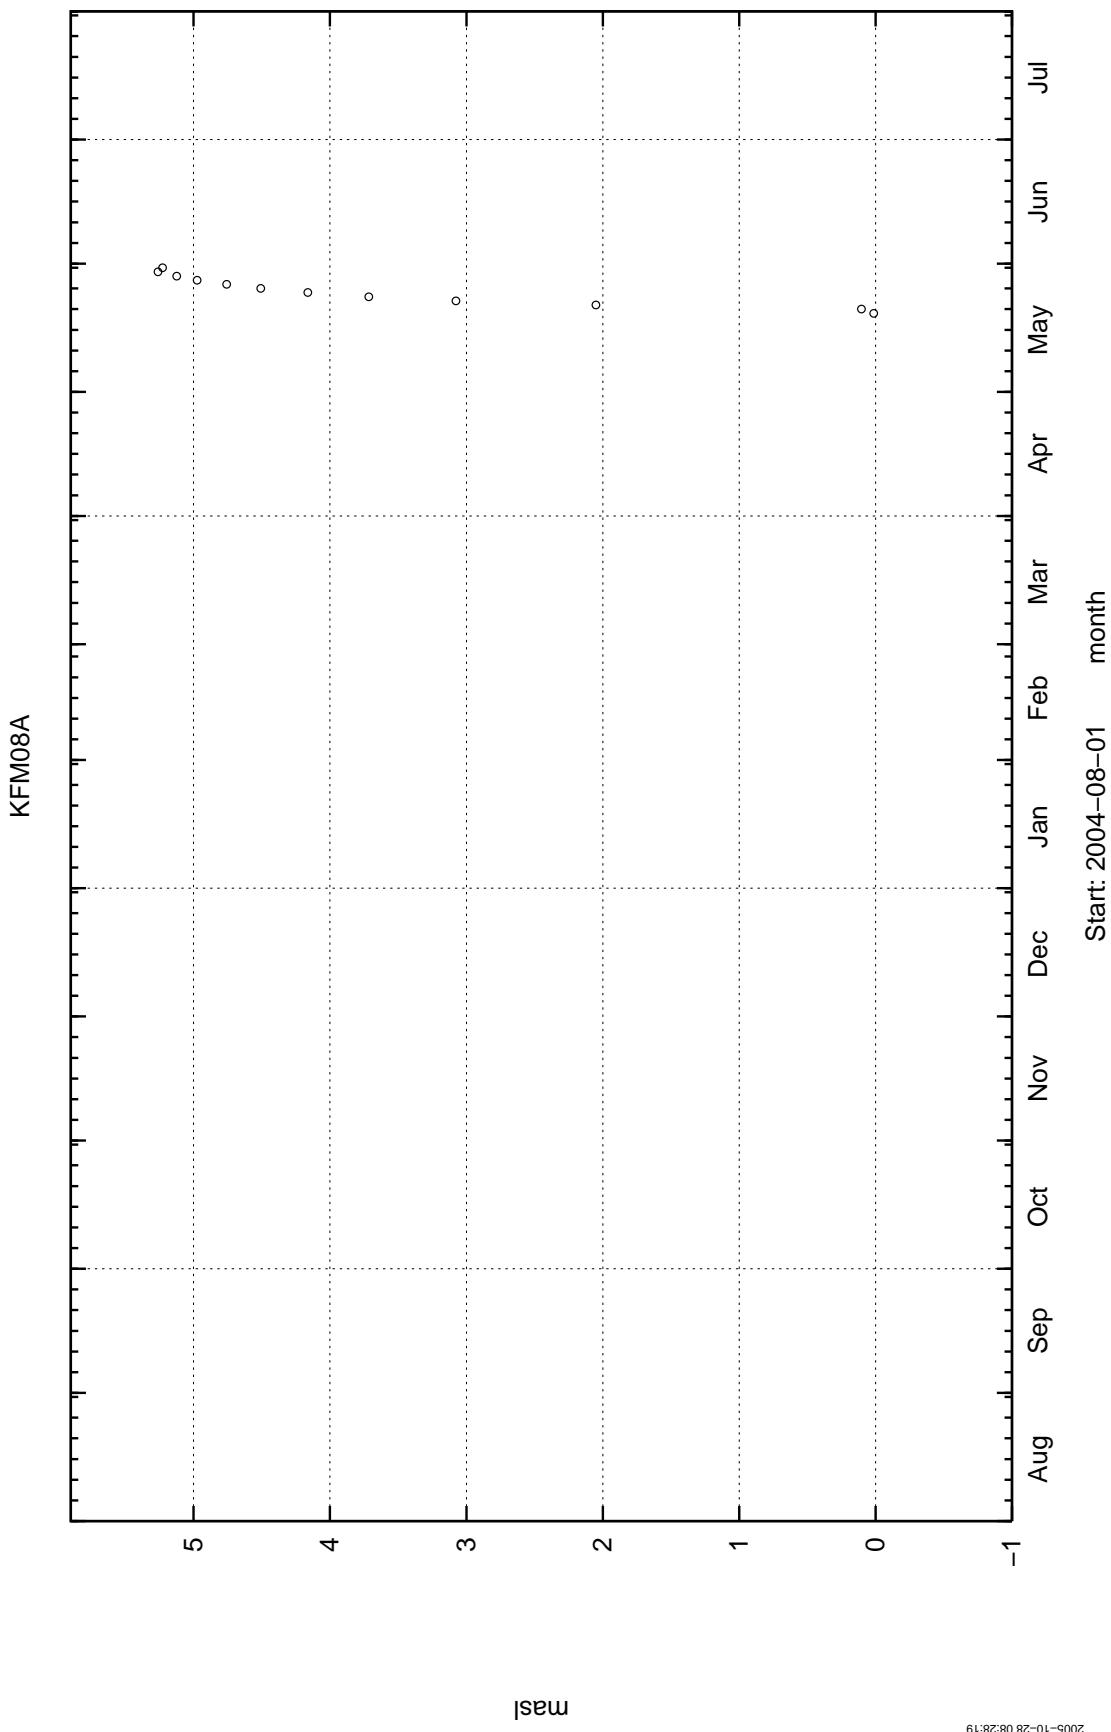


2005-10-28 08:28:19

KFM08B

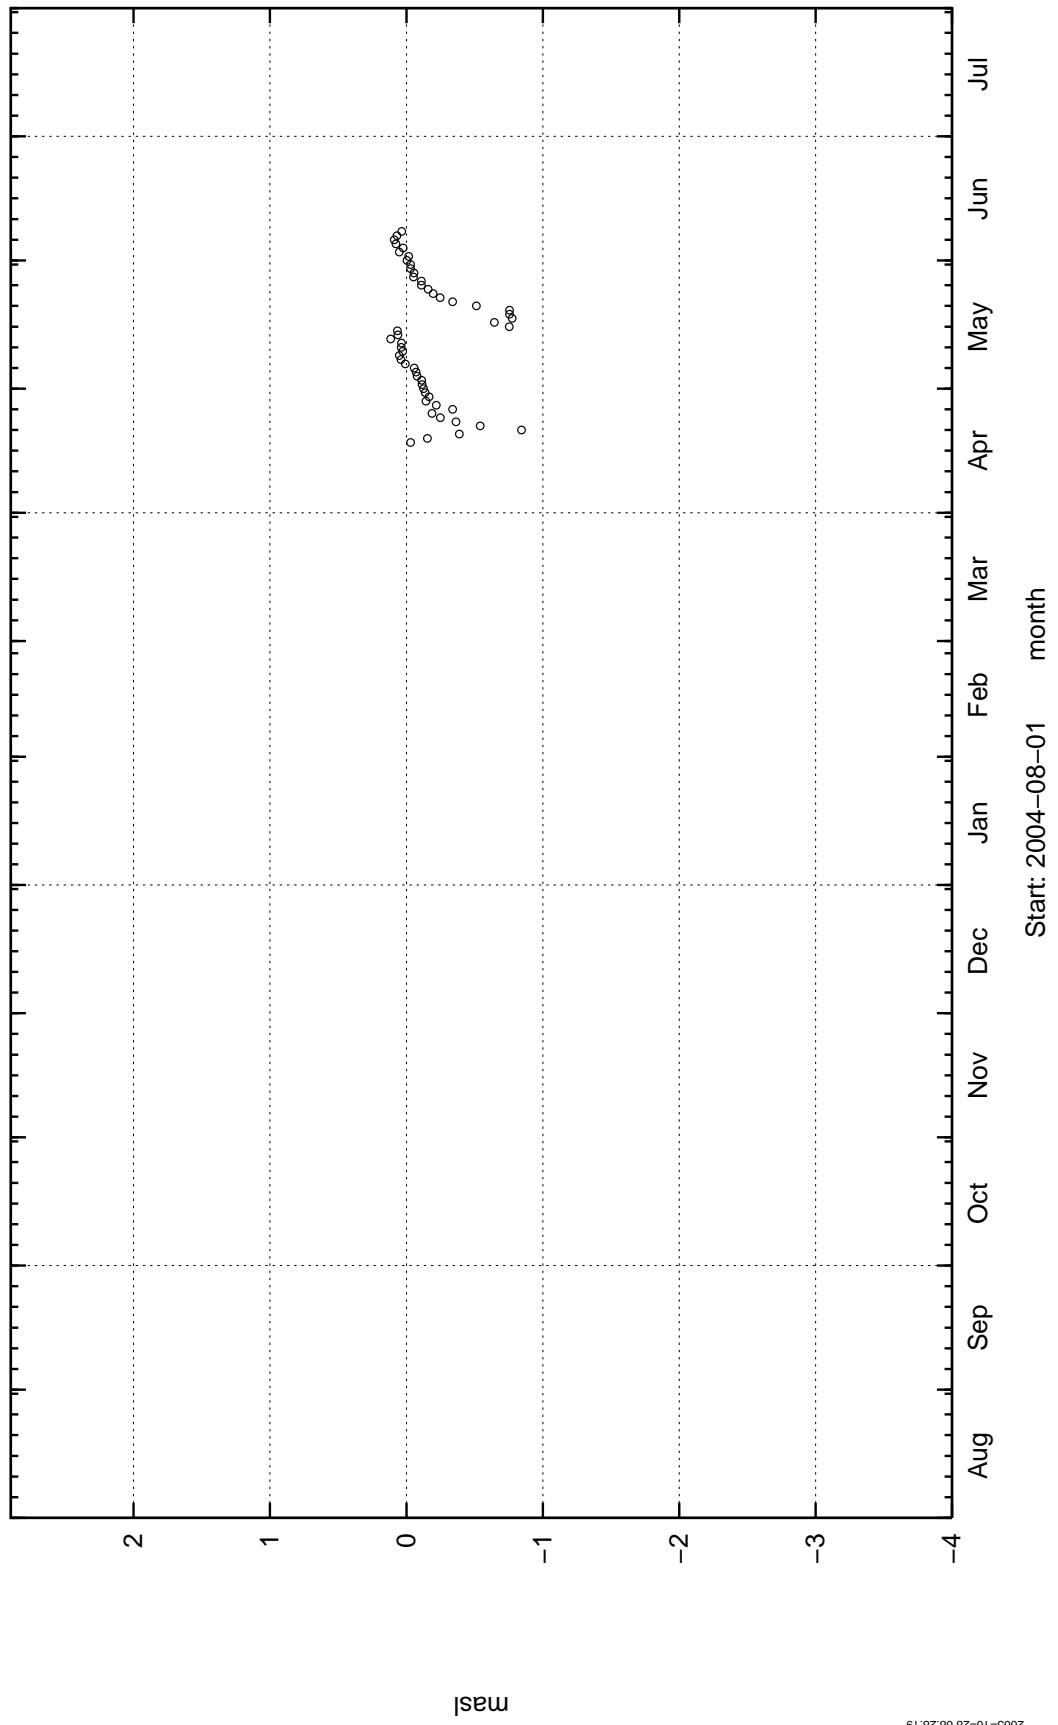



masl


2005-10-28 08:28:19

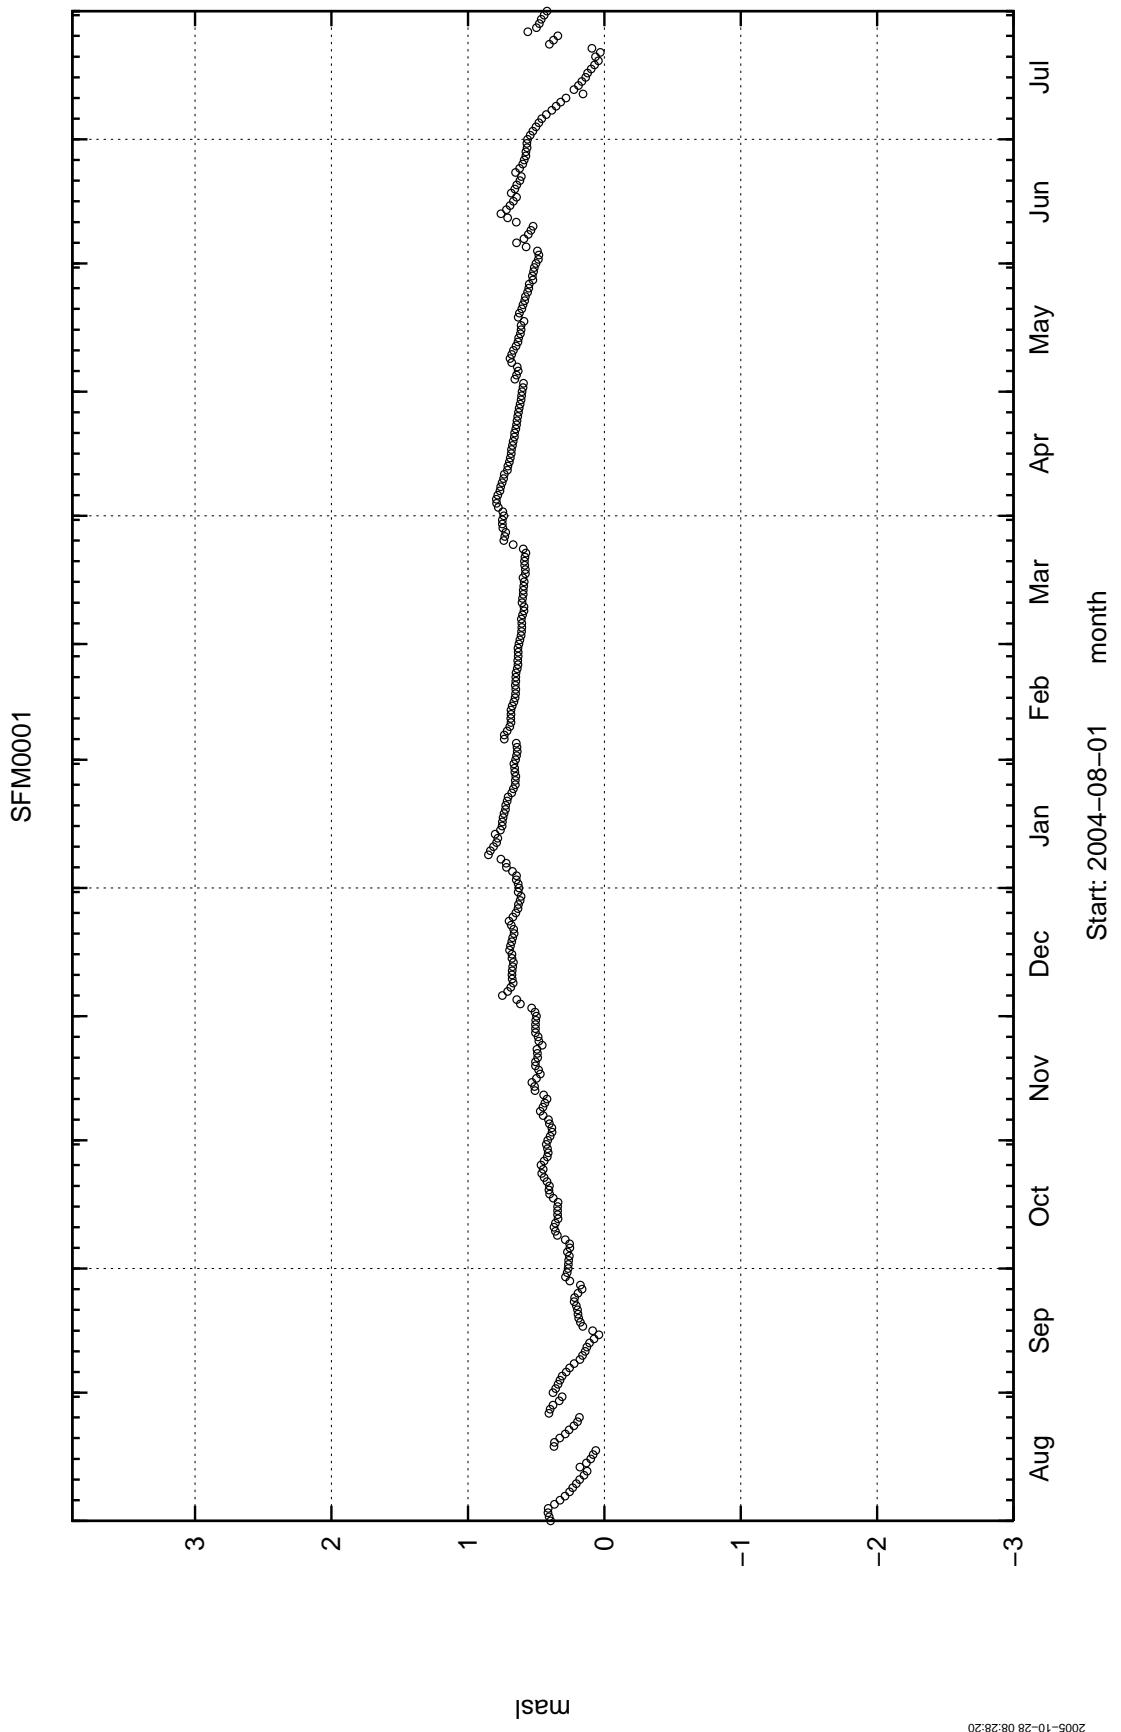


SFM0002

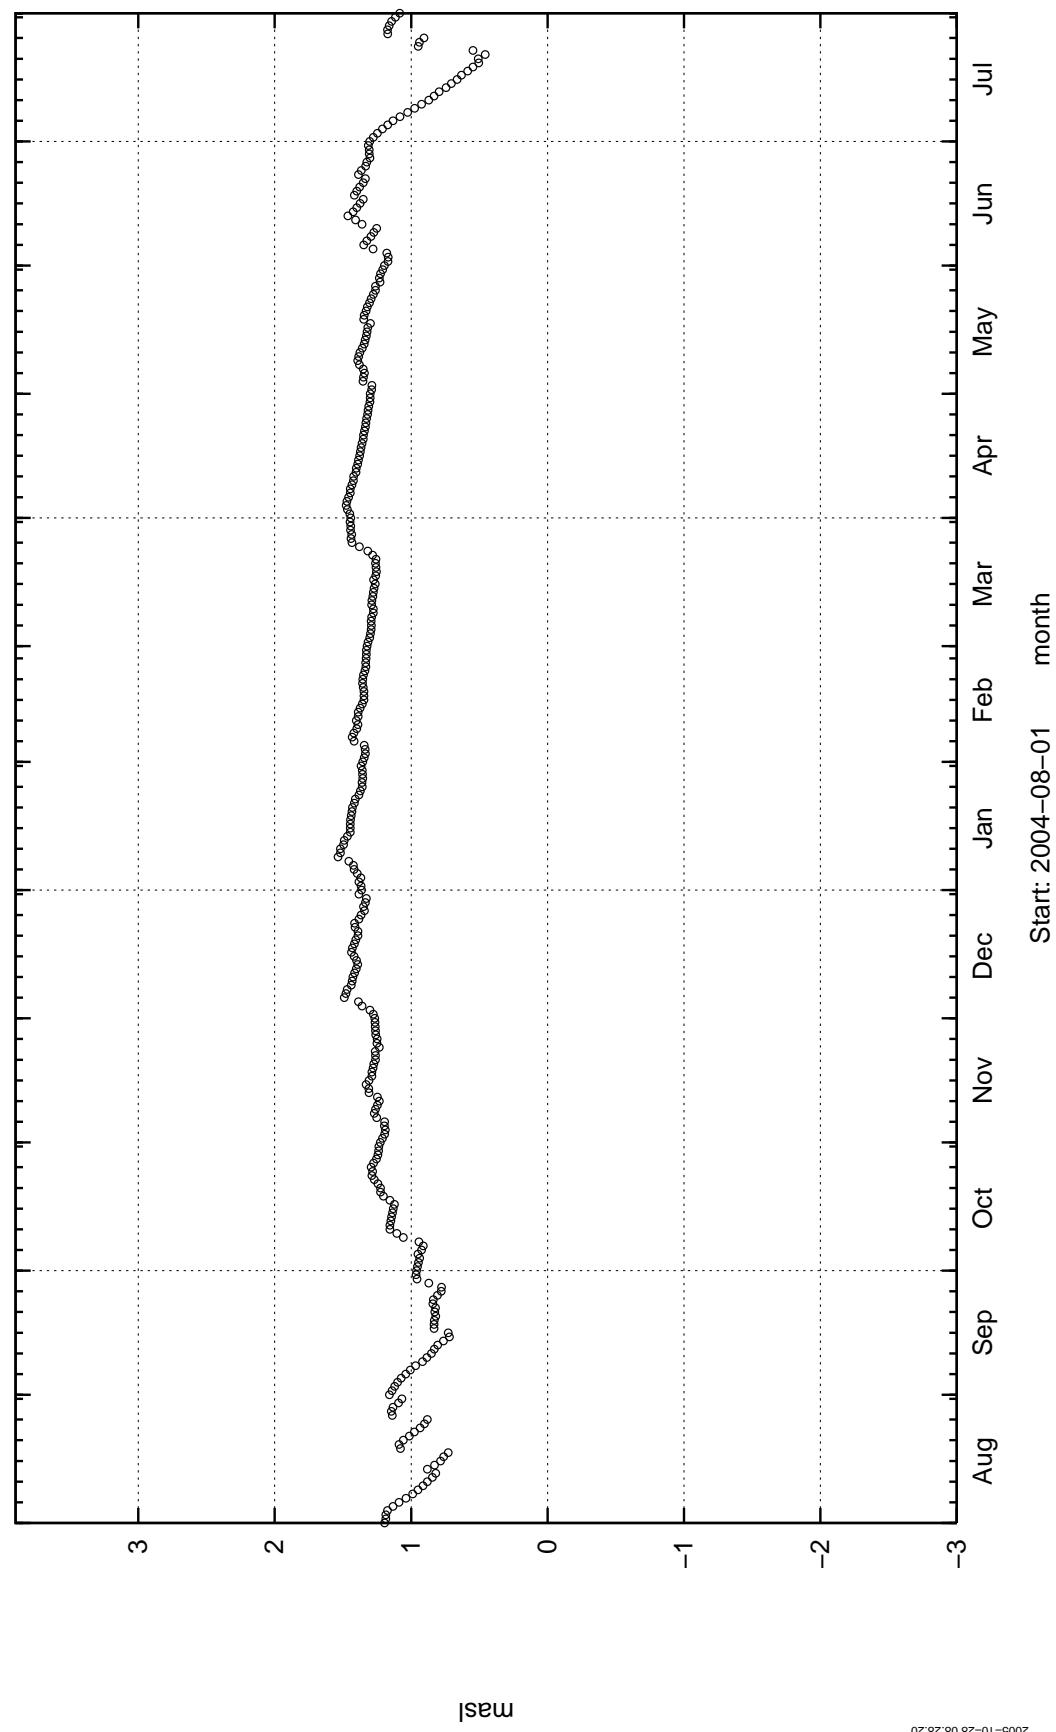

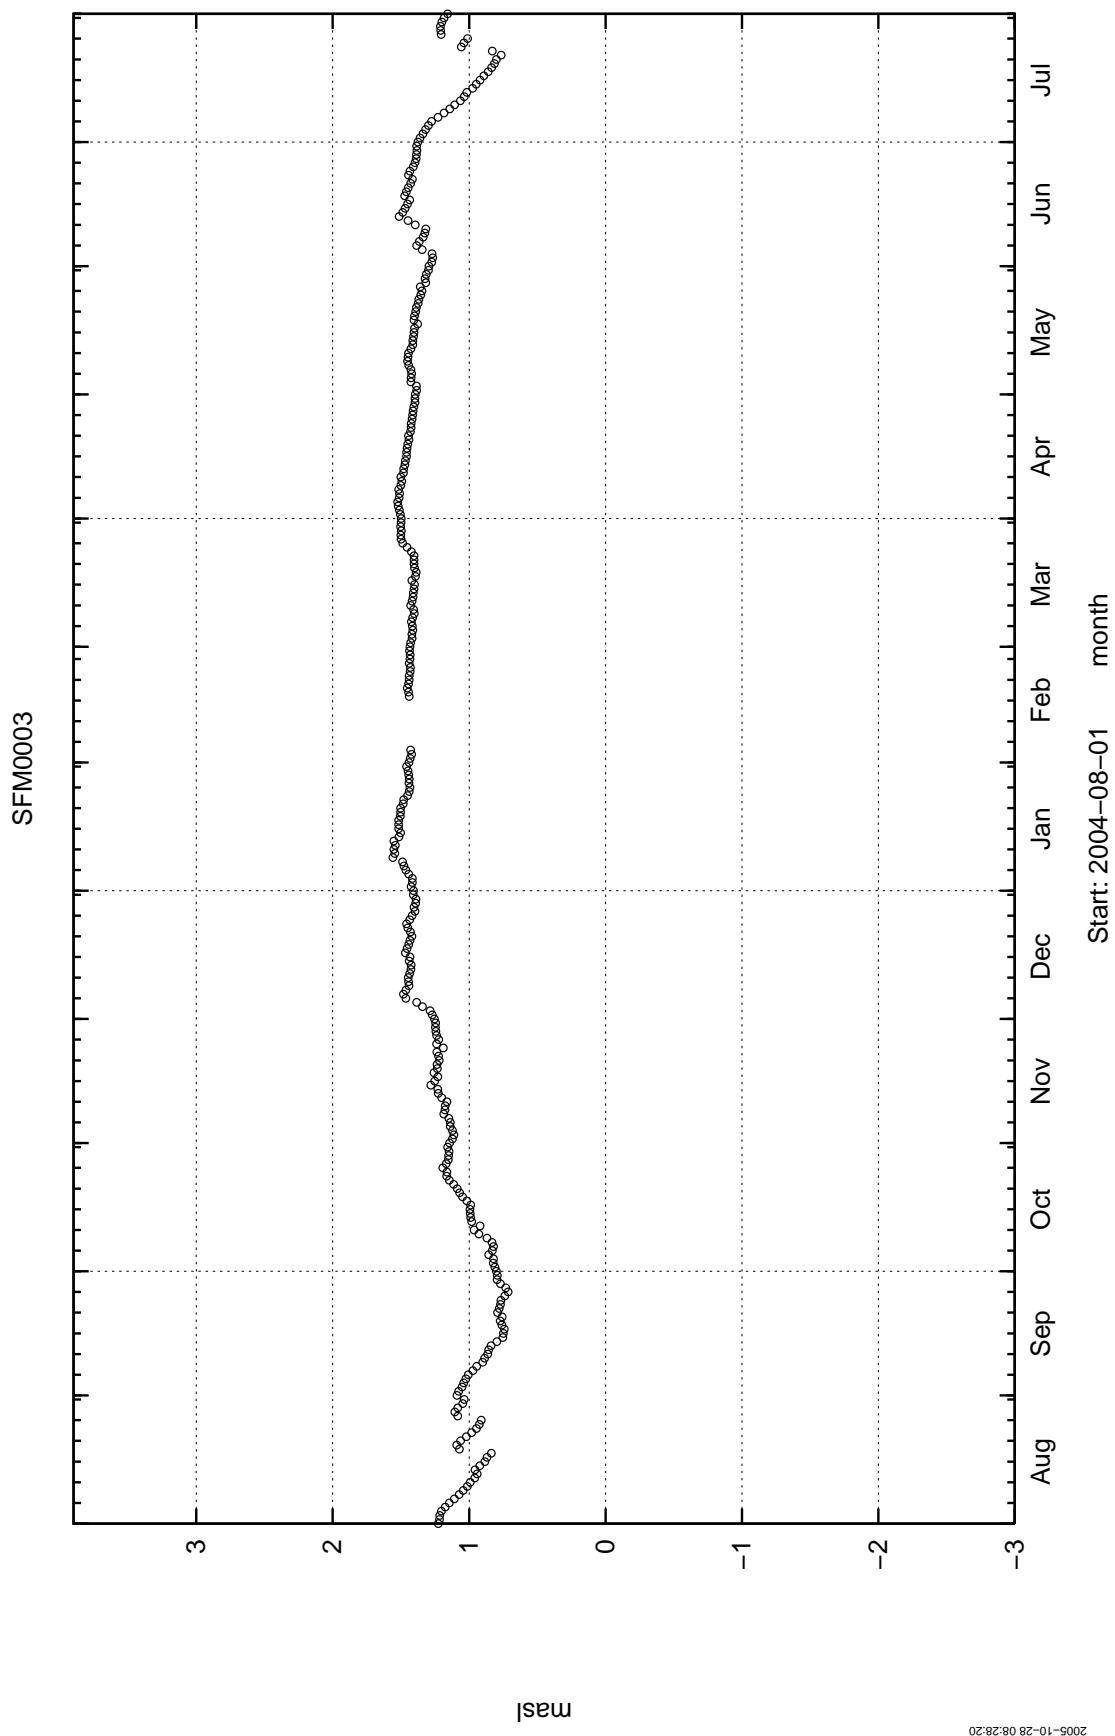


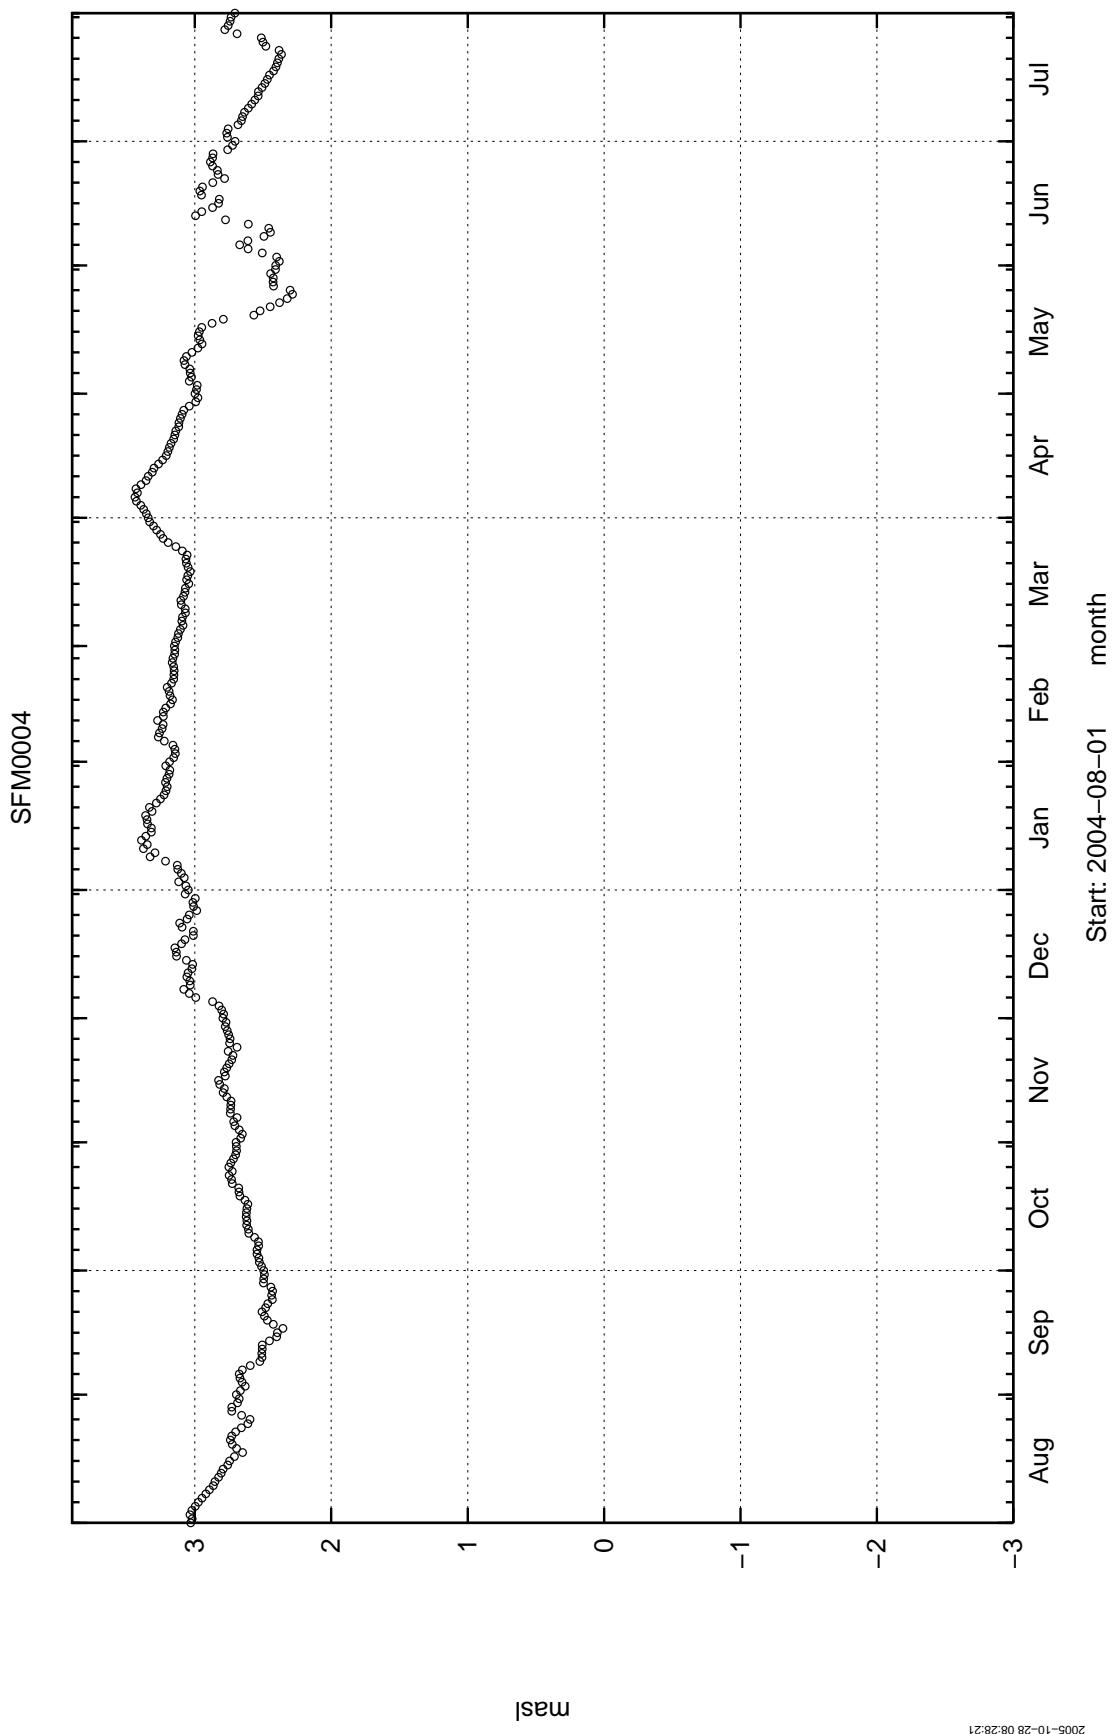


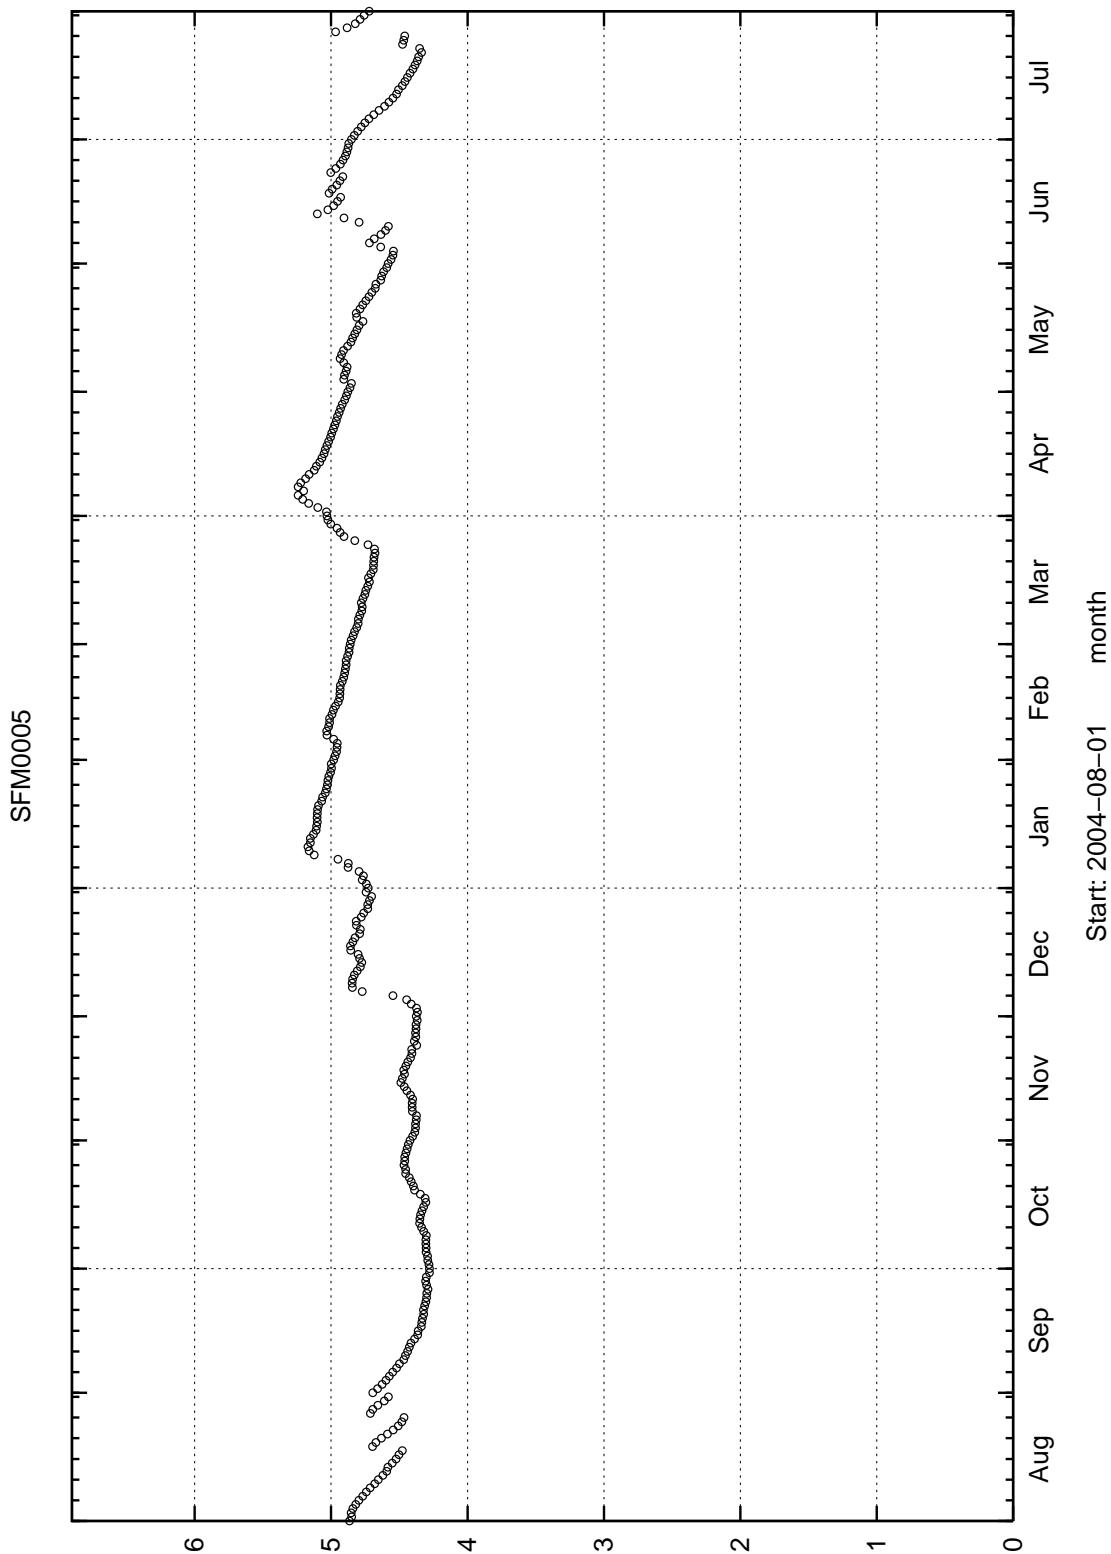


masl

2005-10-26 08:28:21

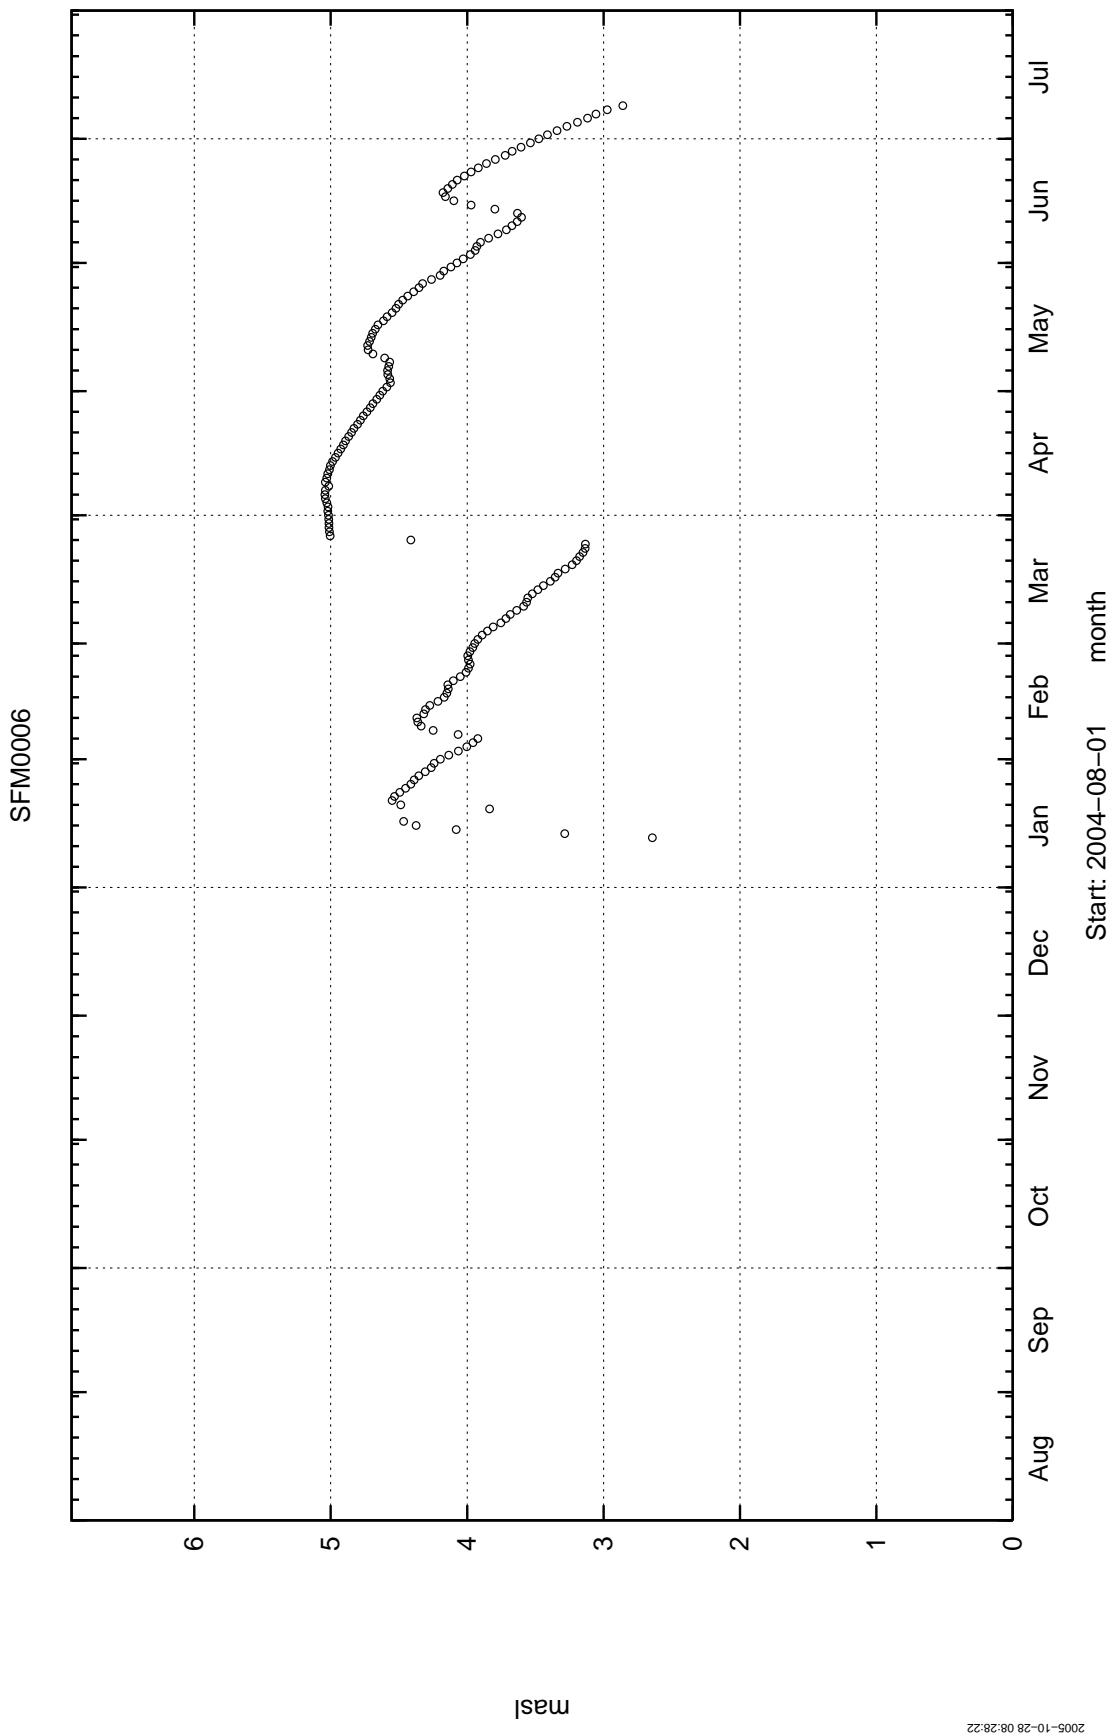


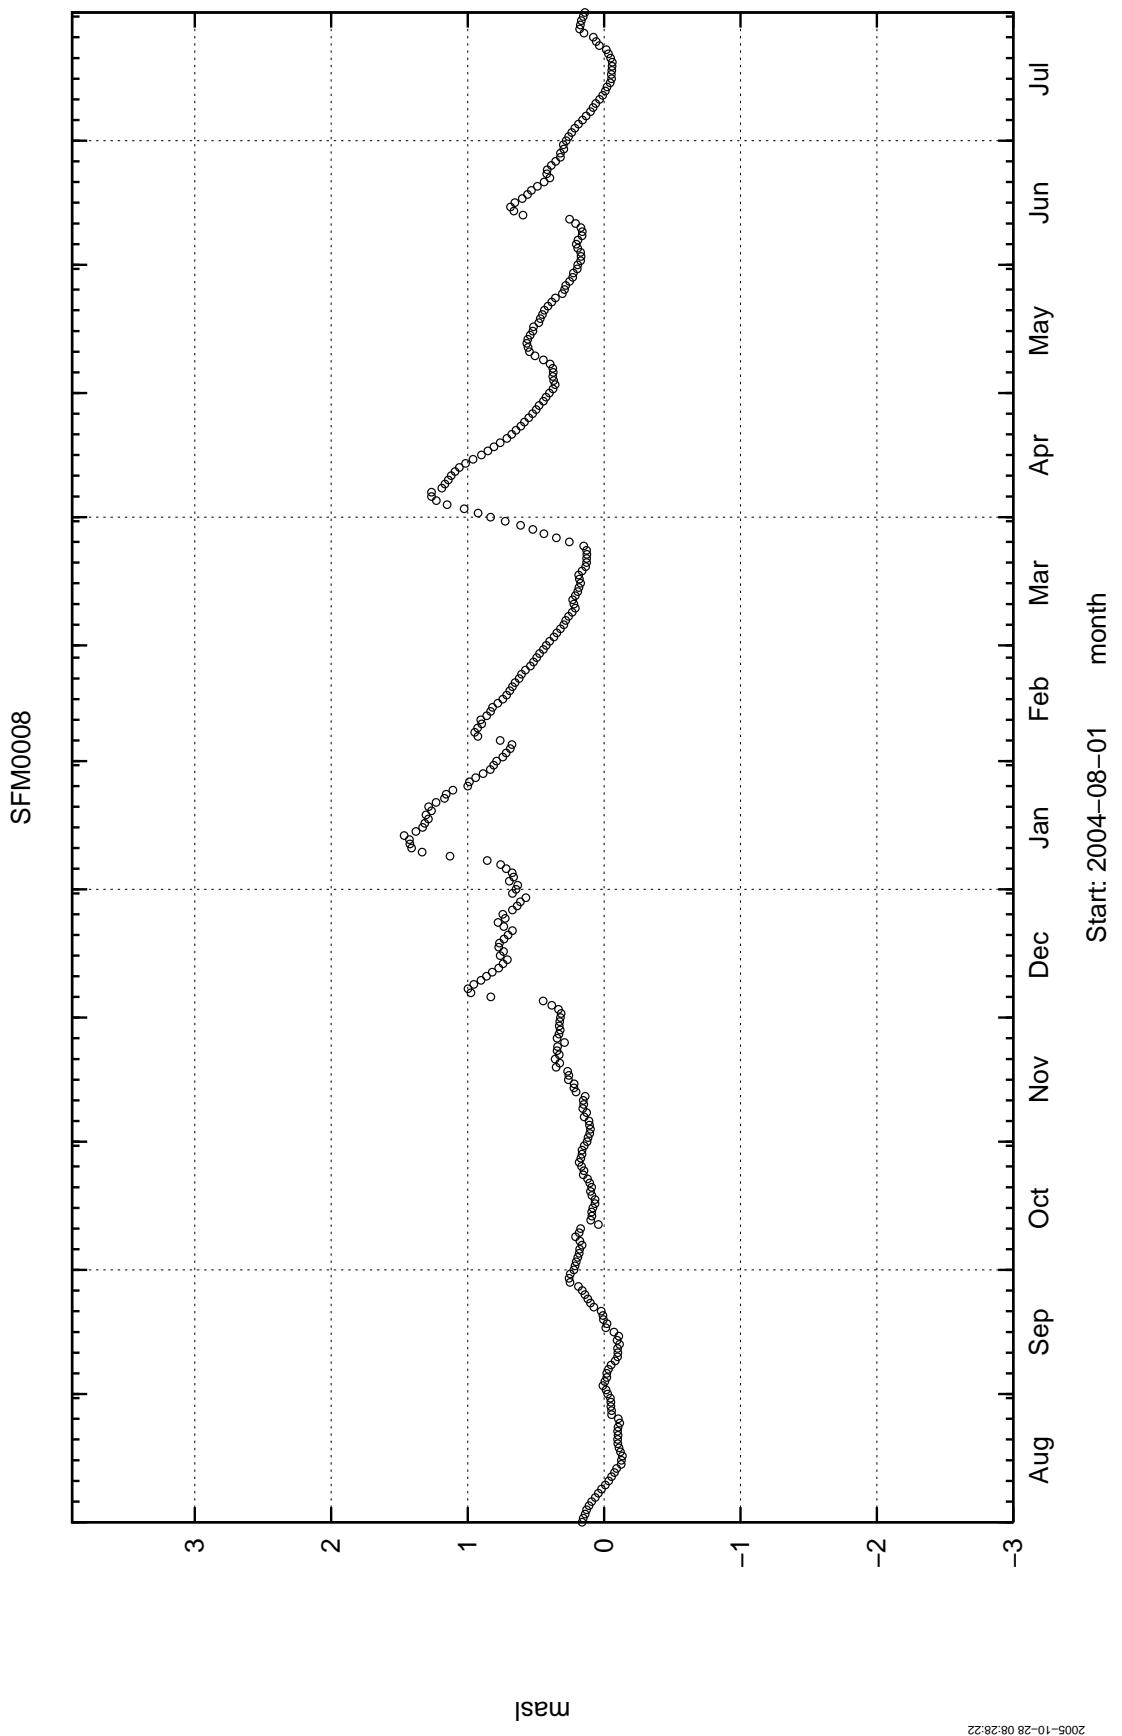

SFM0009

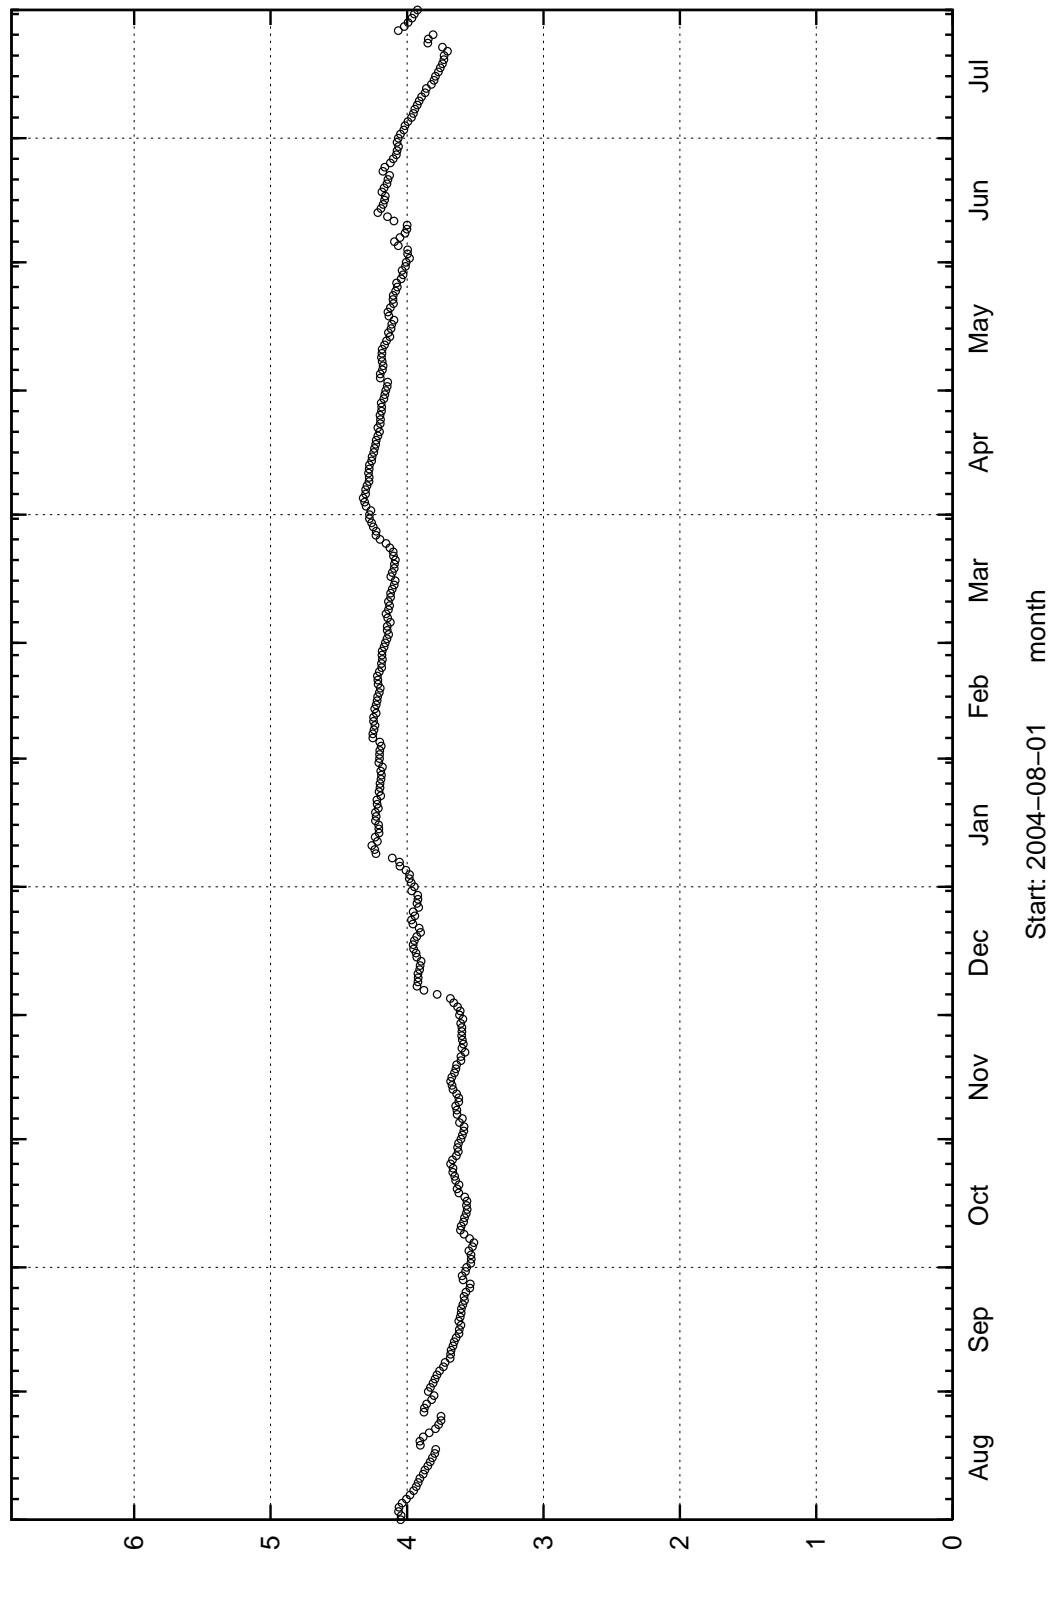


2005-10-28 08:28:22

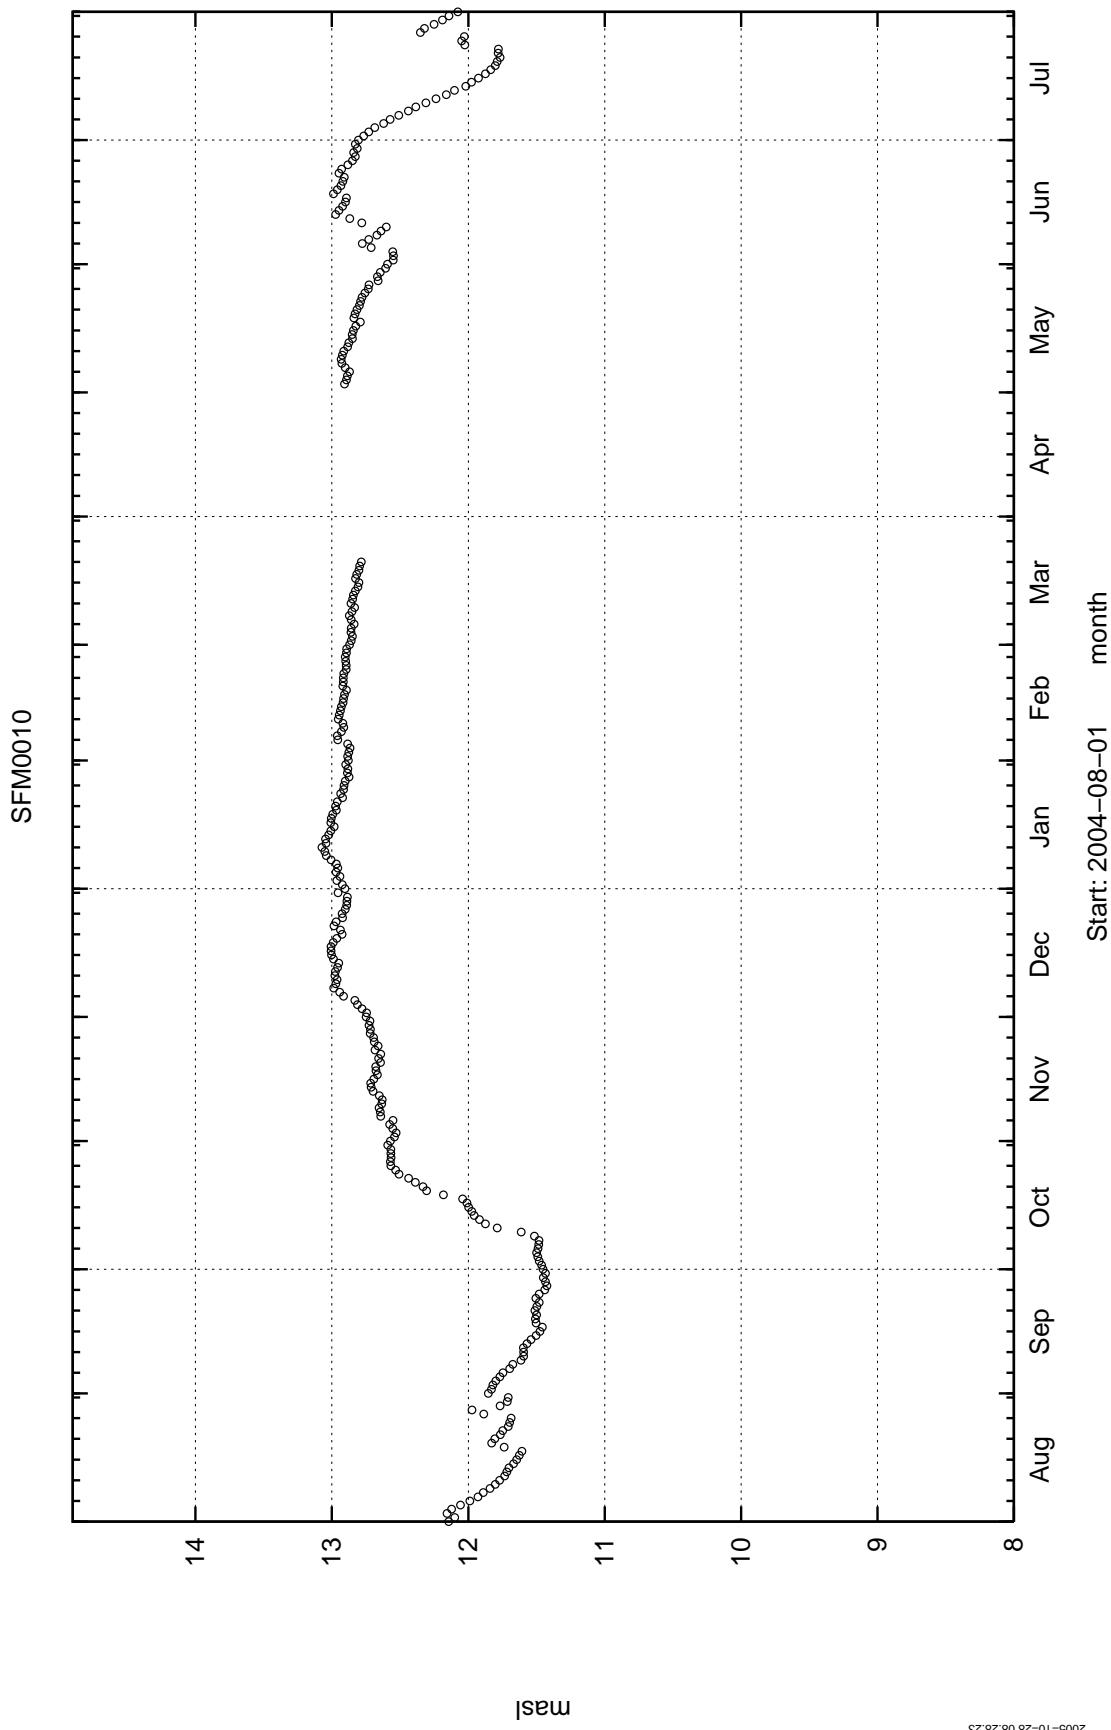


2005-10-26 08:26:23

SFM0011

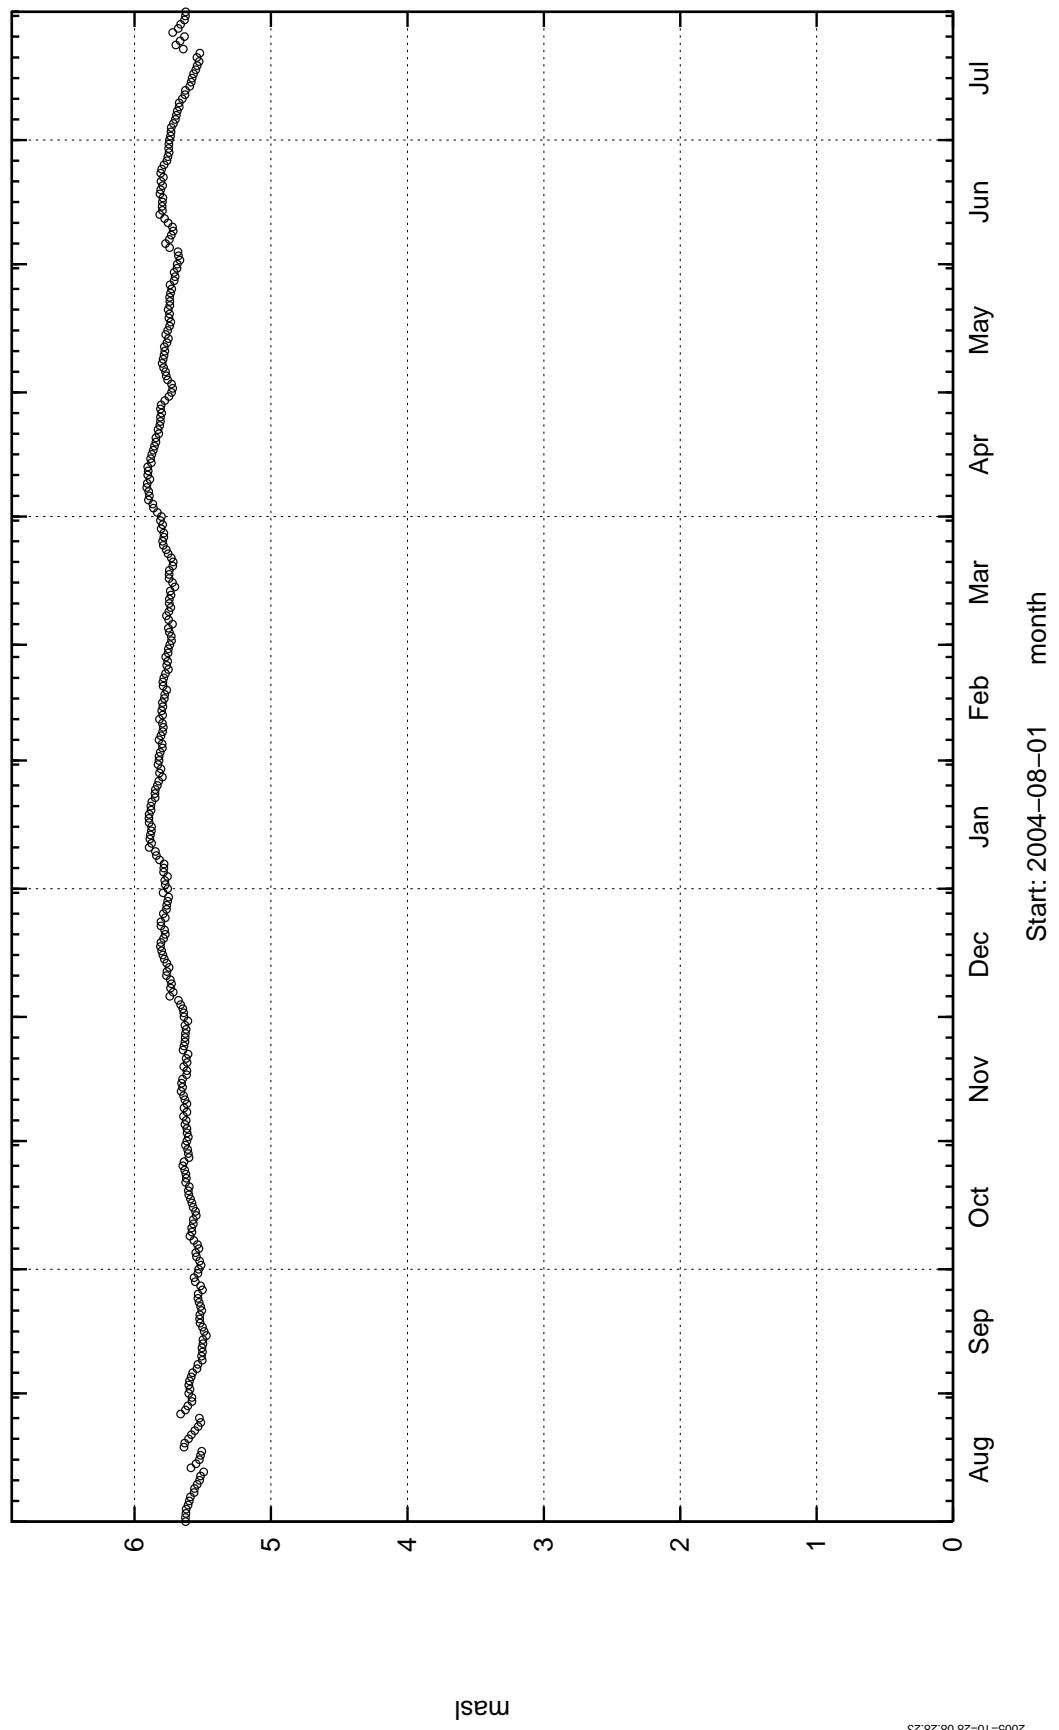



2005-10-26 06:26:23

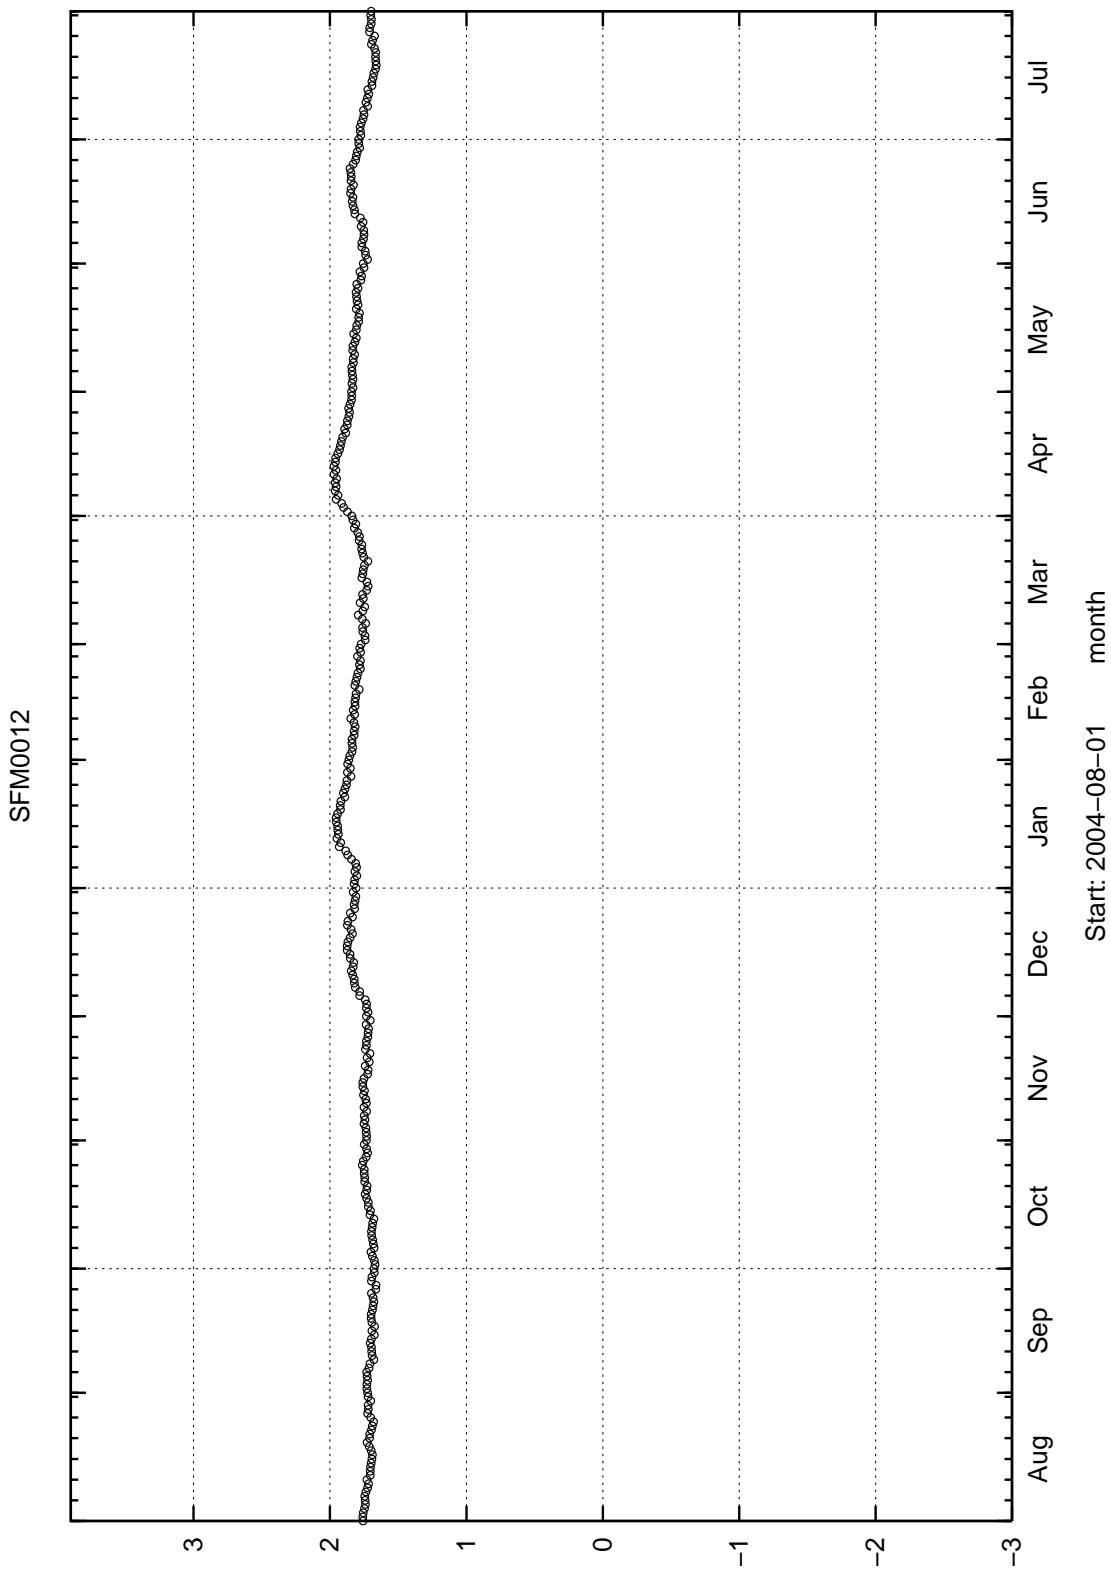

2005-10-28 08:28:24

SFM0013

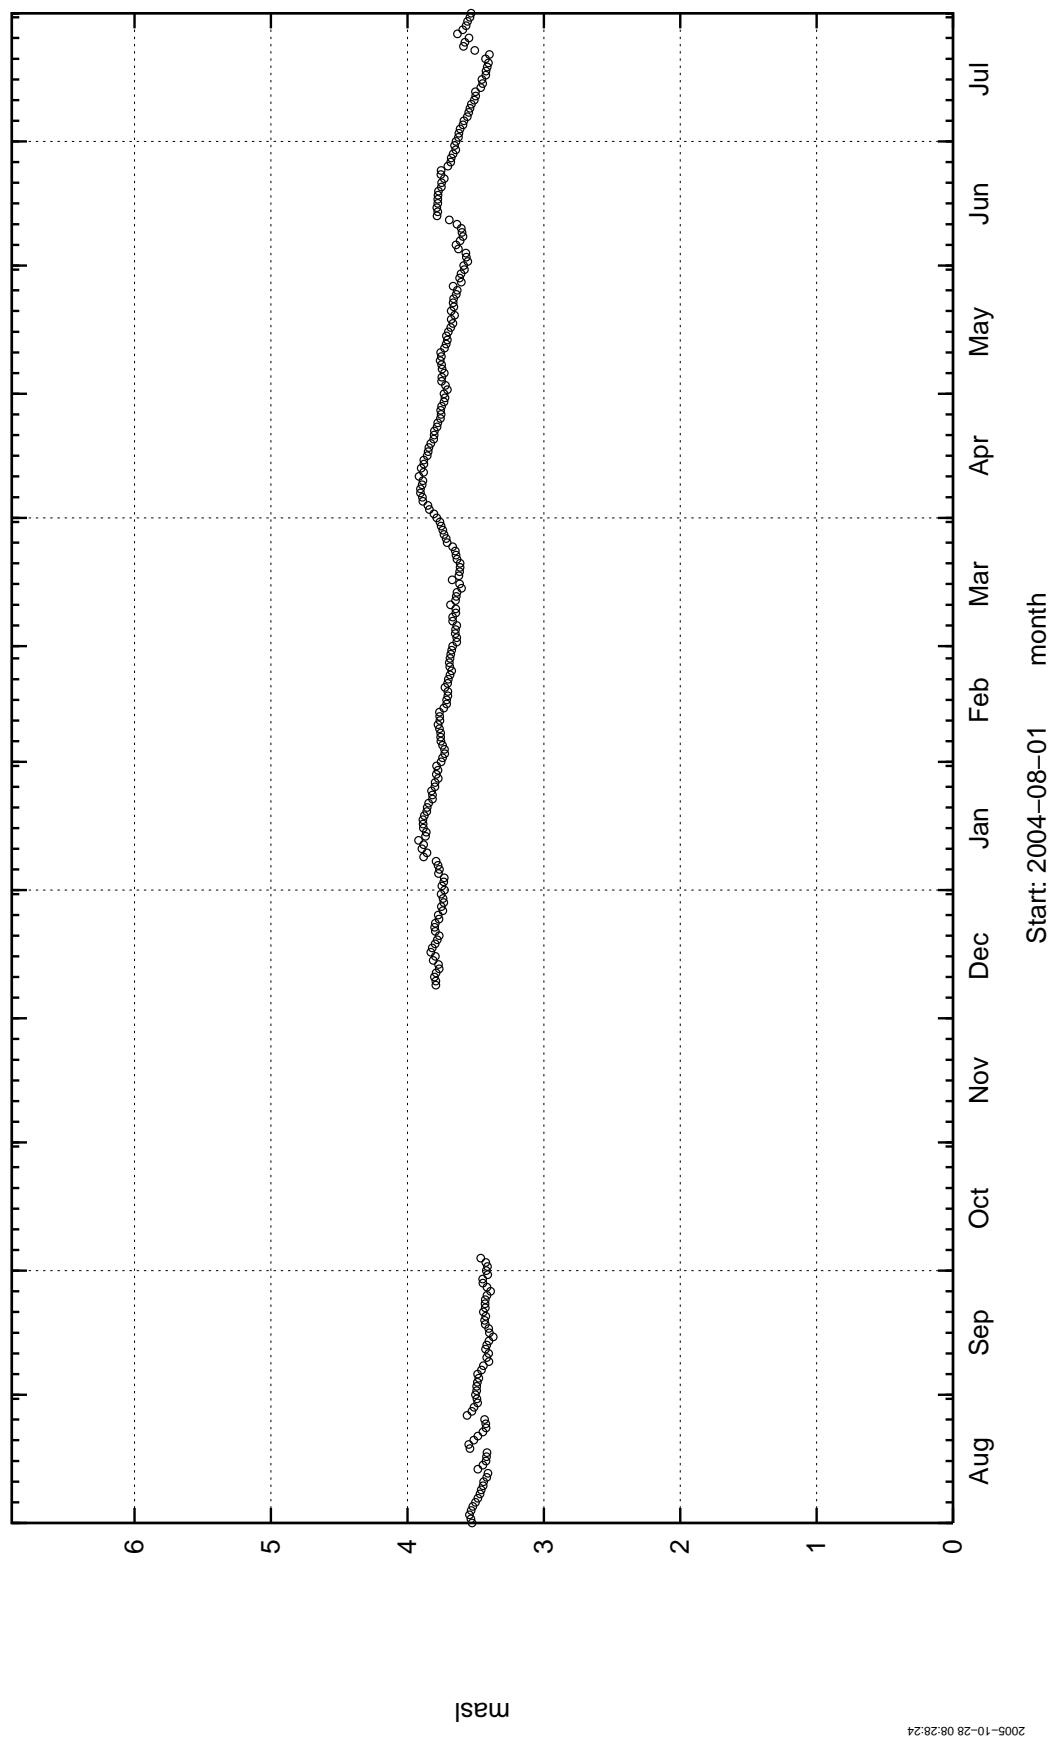


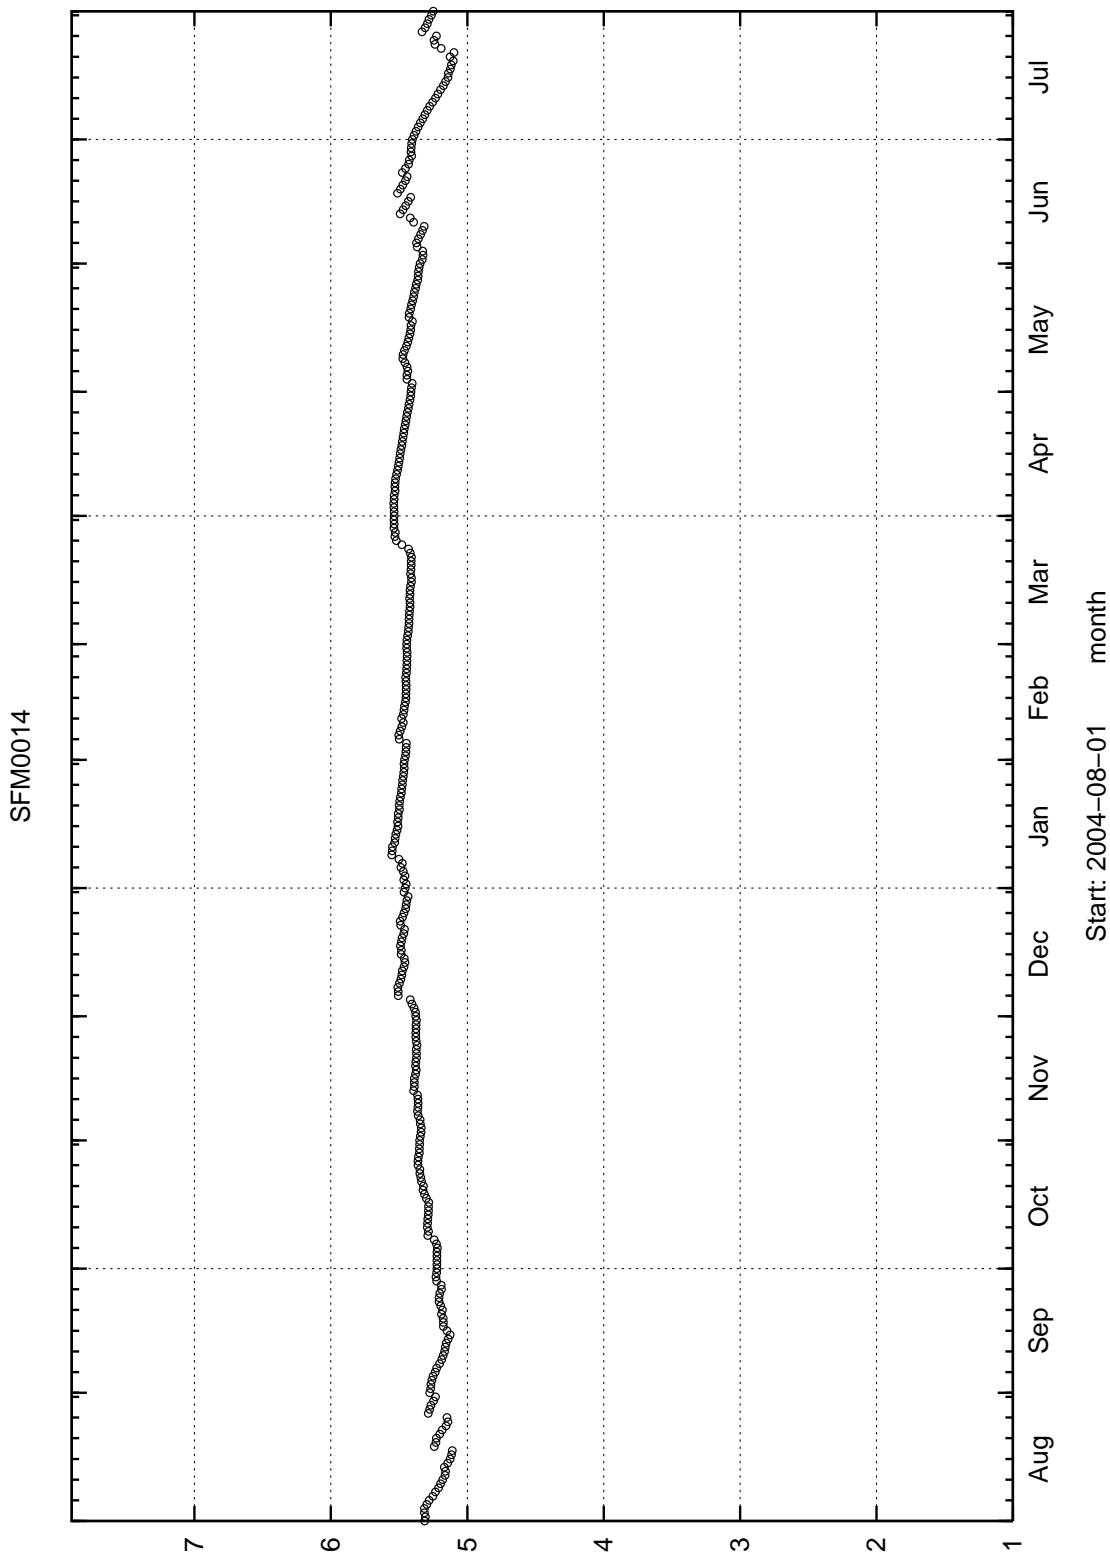

masl


2005-10-26 08:26:25

SFM0015

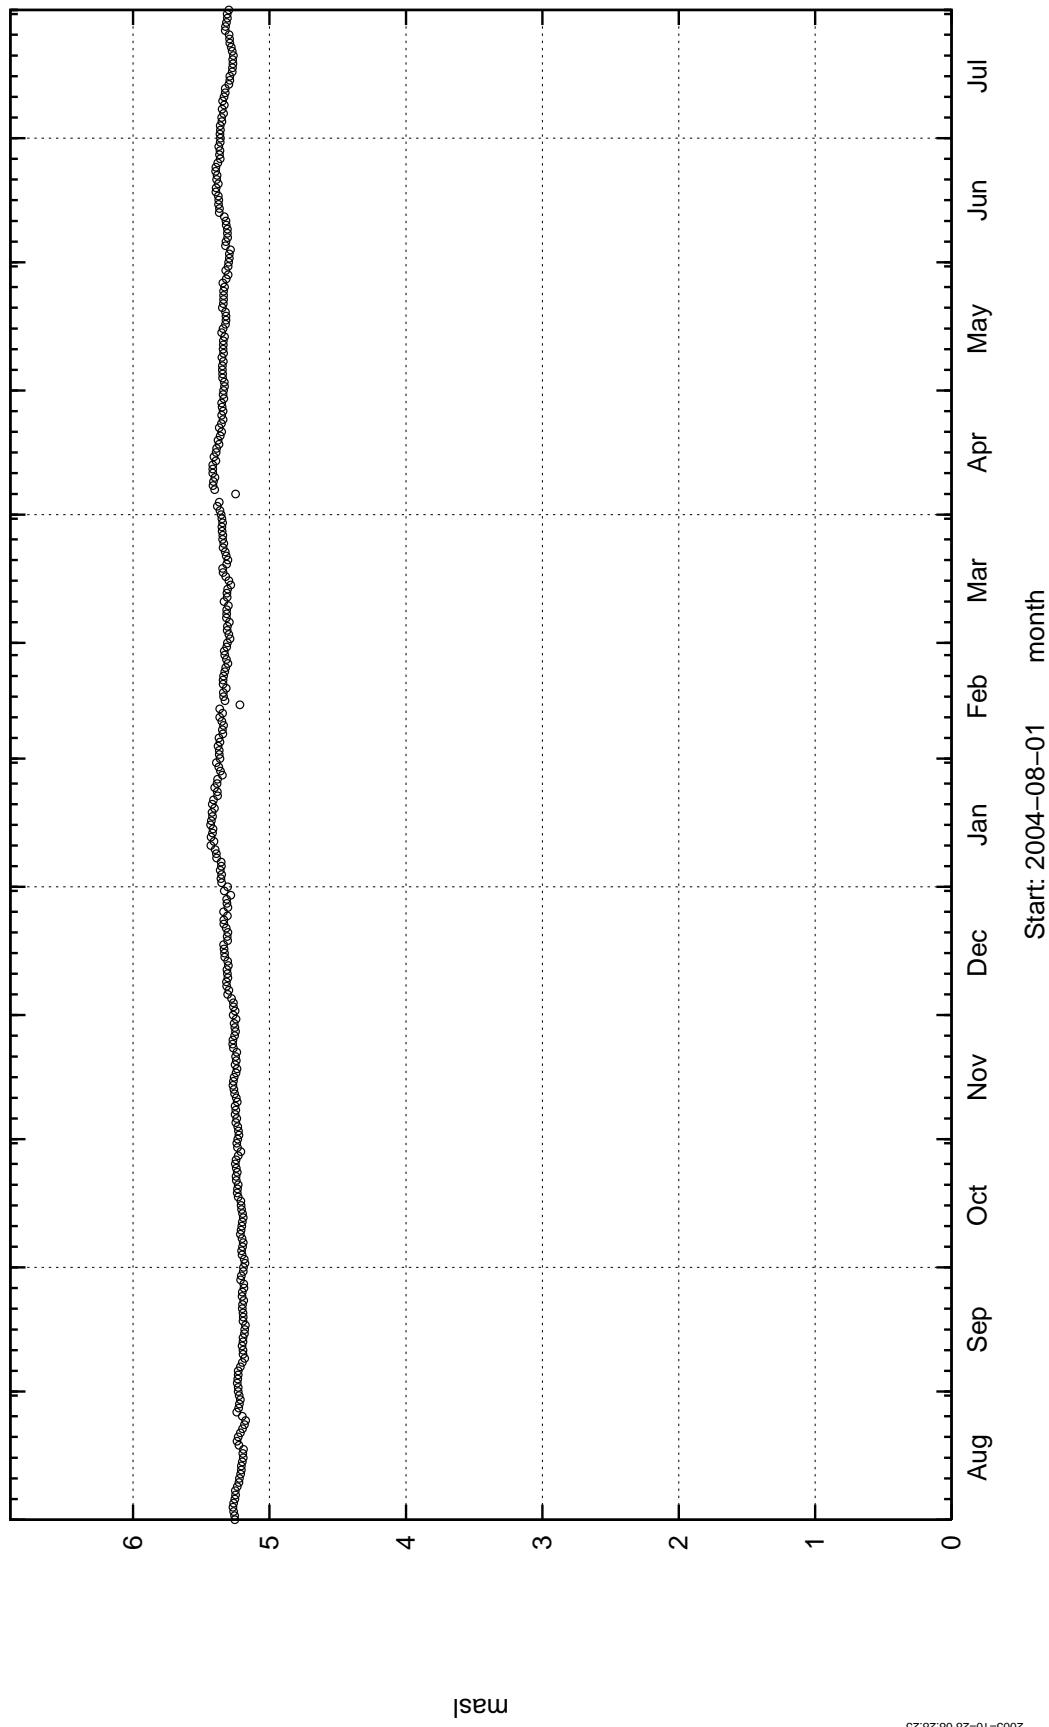


masl

2005-10-28 08:28:25

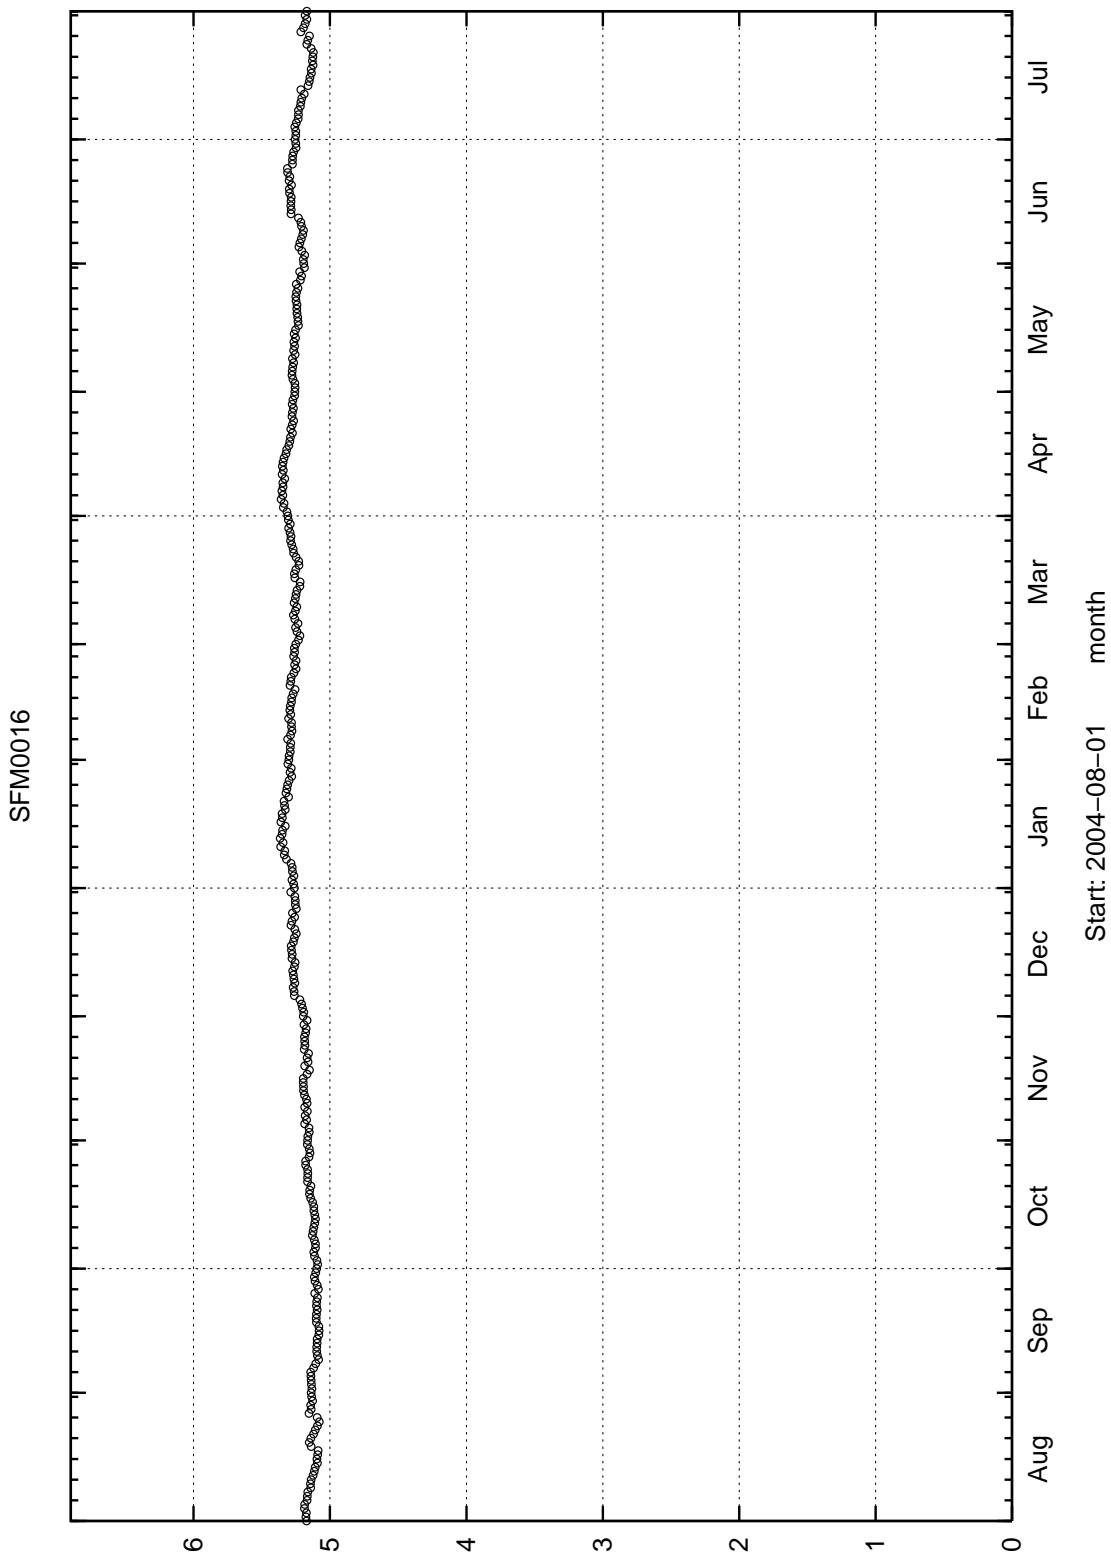


2005-10-28 08:28:26

SFM0017

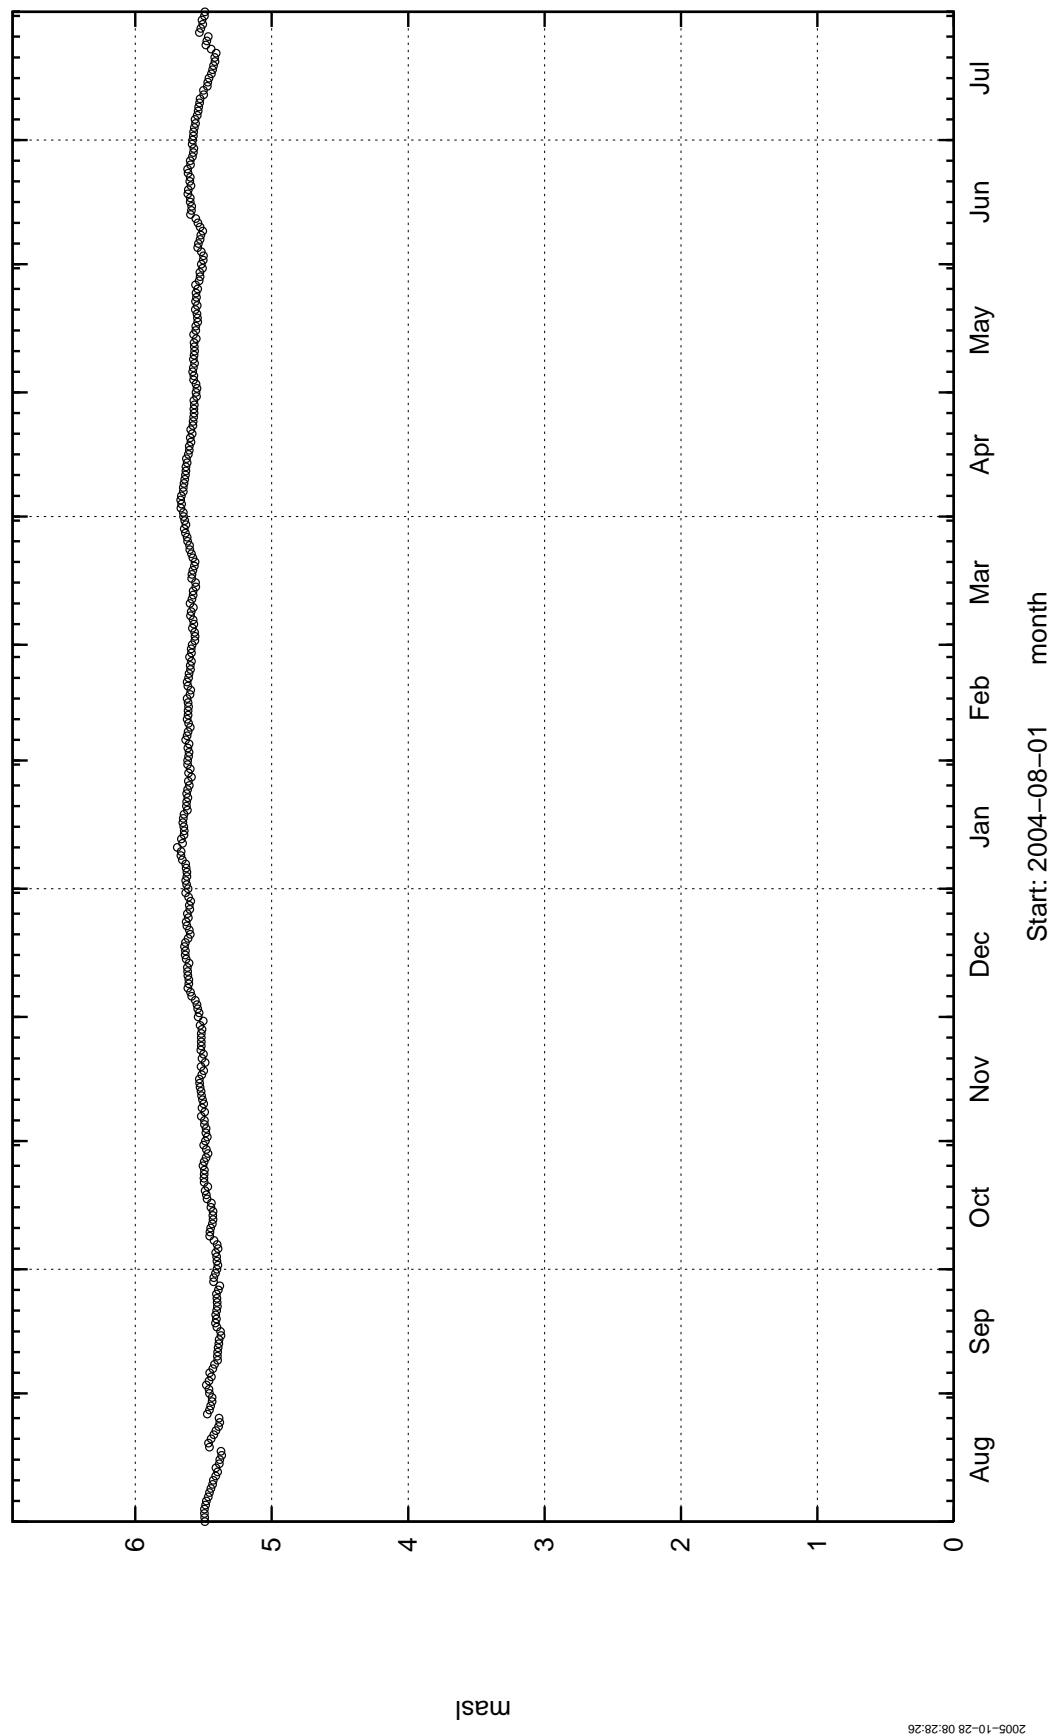


masl


2005-10-26 08:26:26

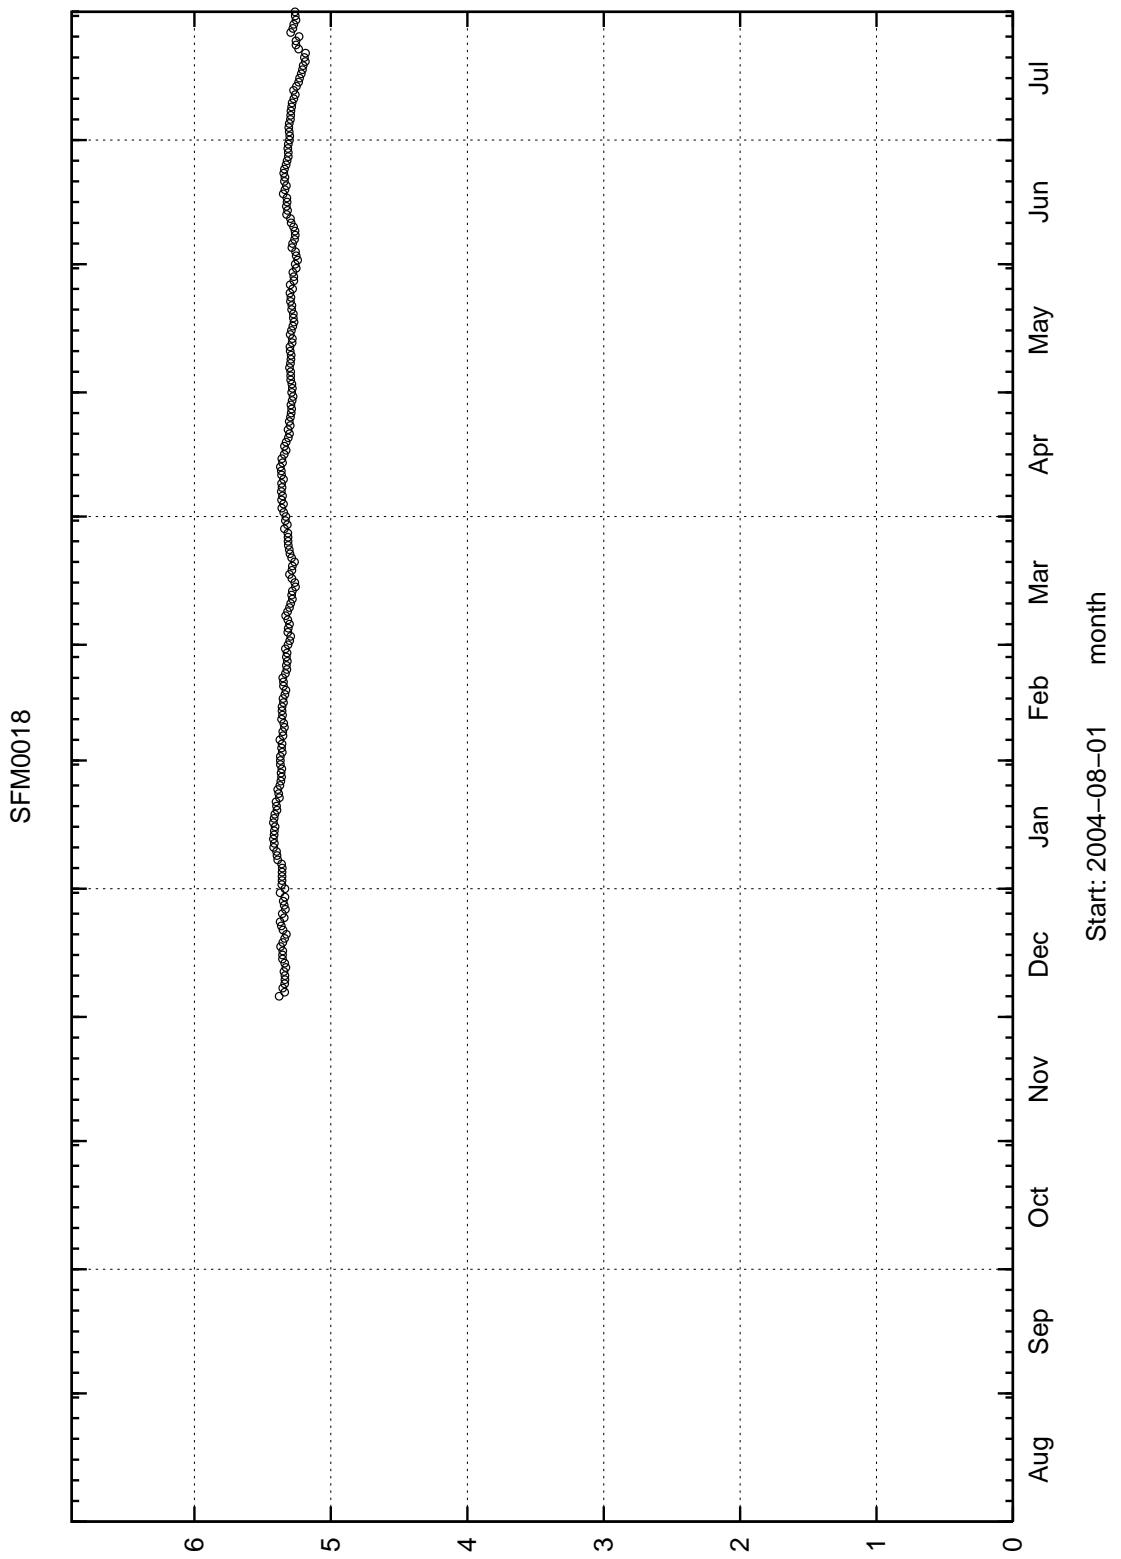


masl


2005-10-26 08:26:26

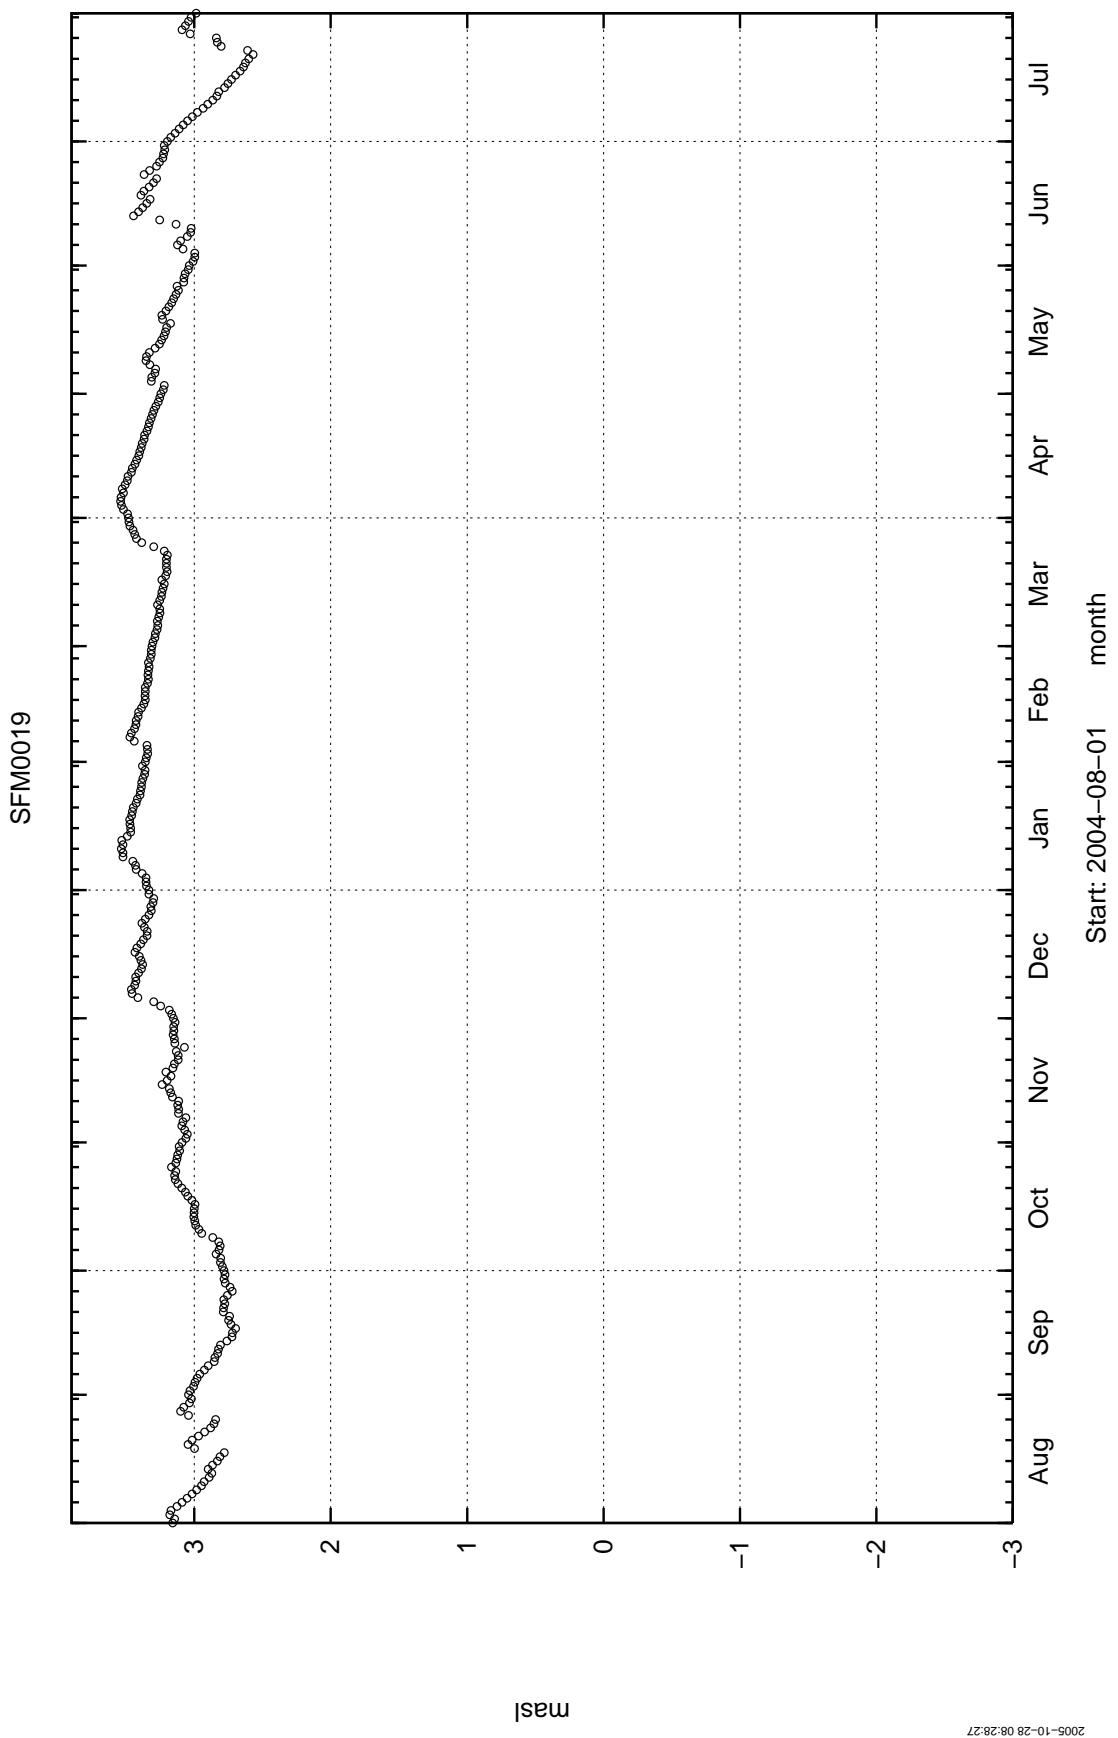

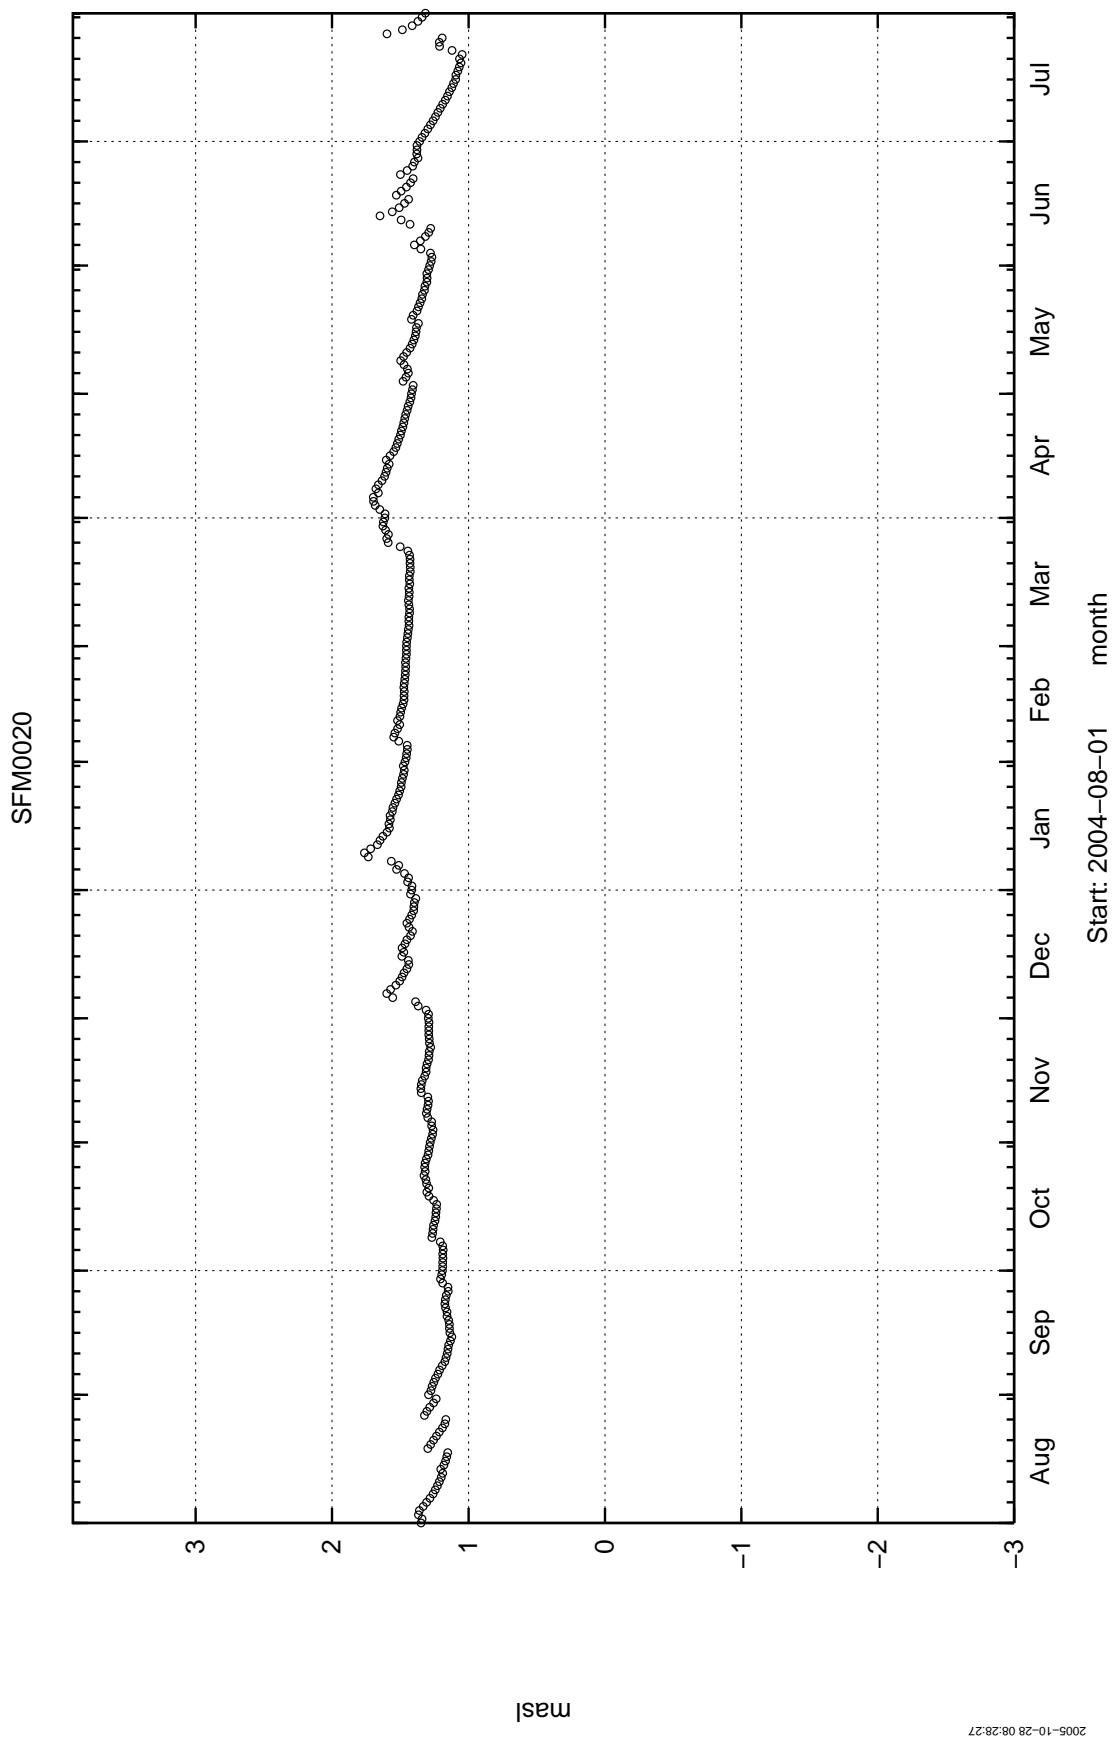



SFM0021

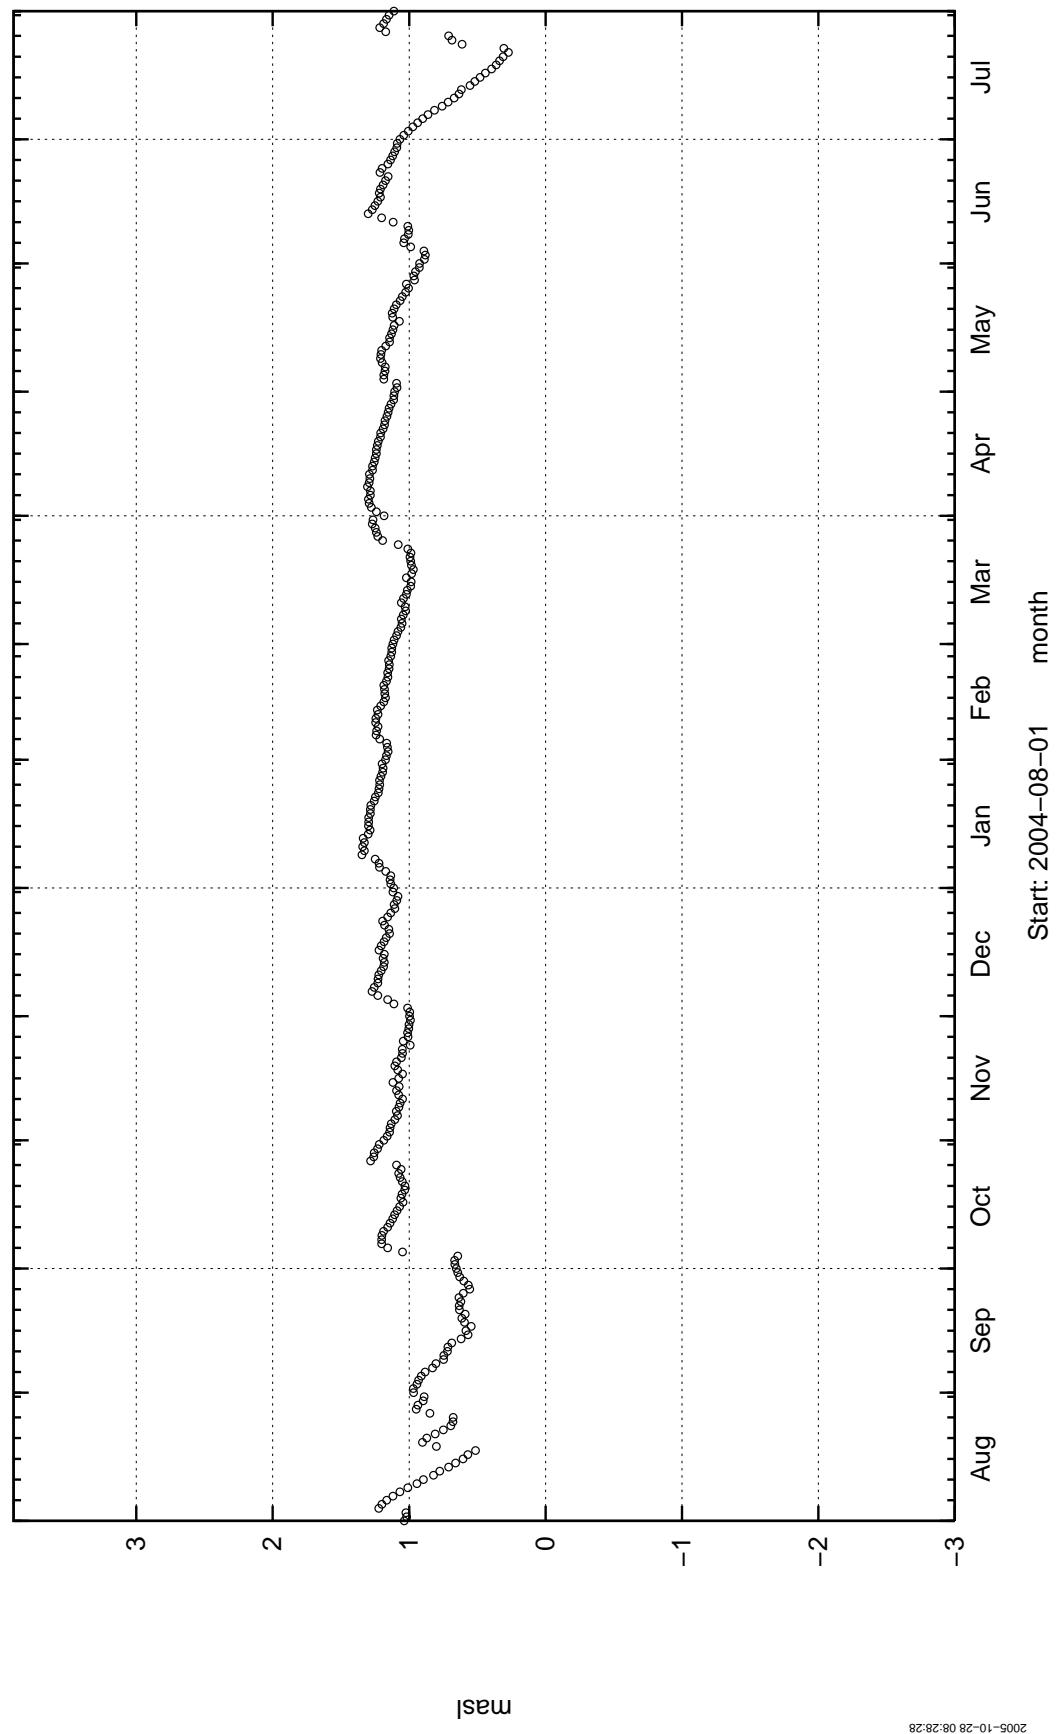


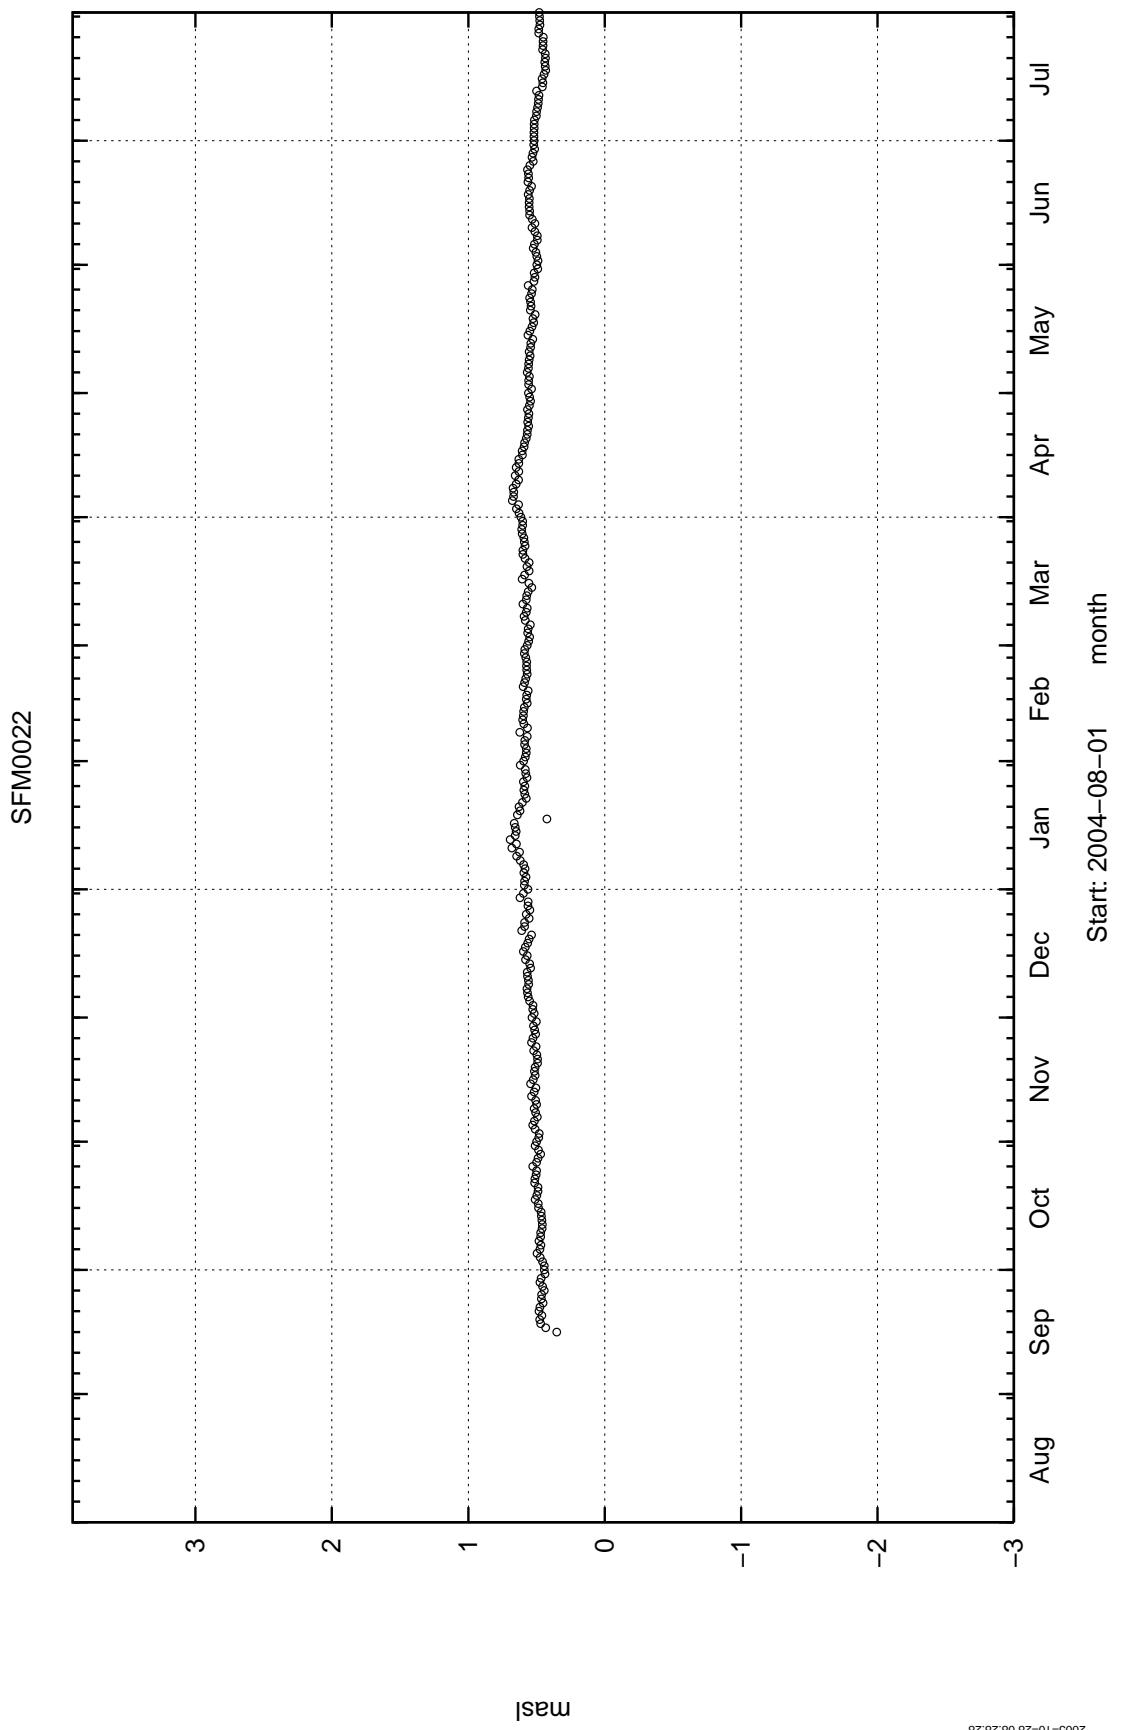


SFM0023

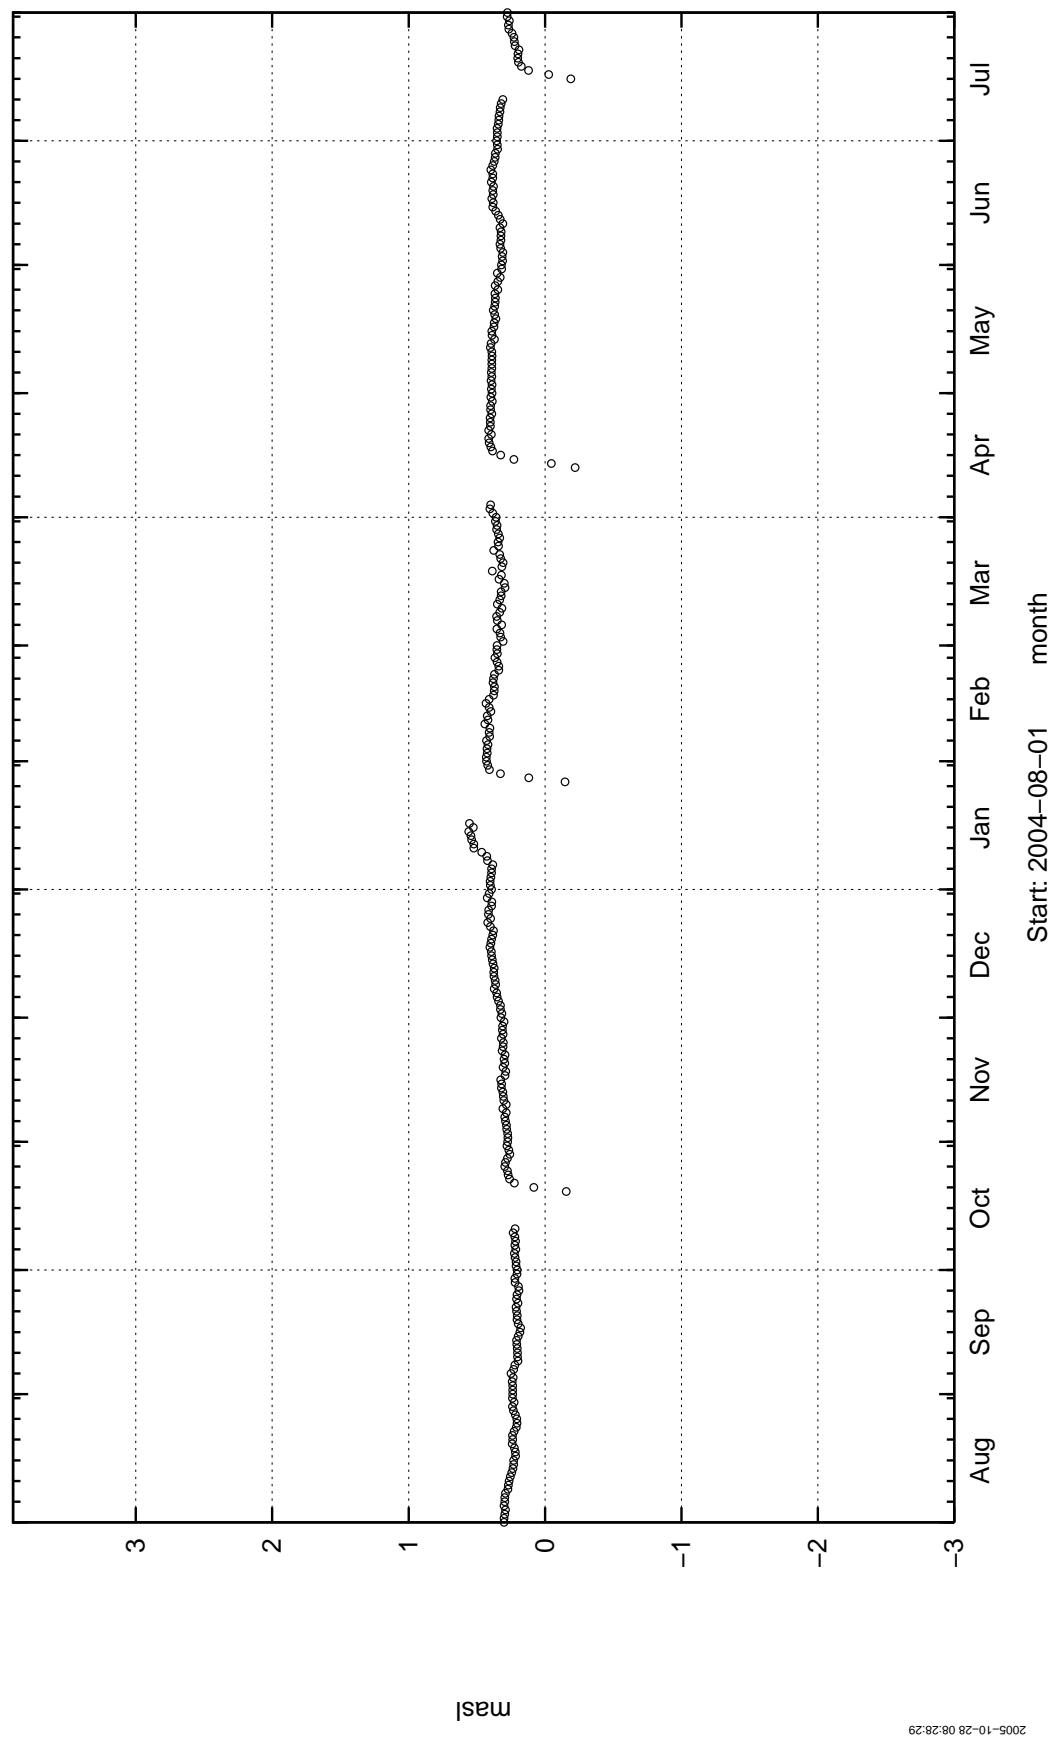

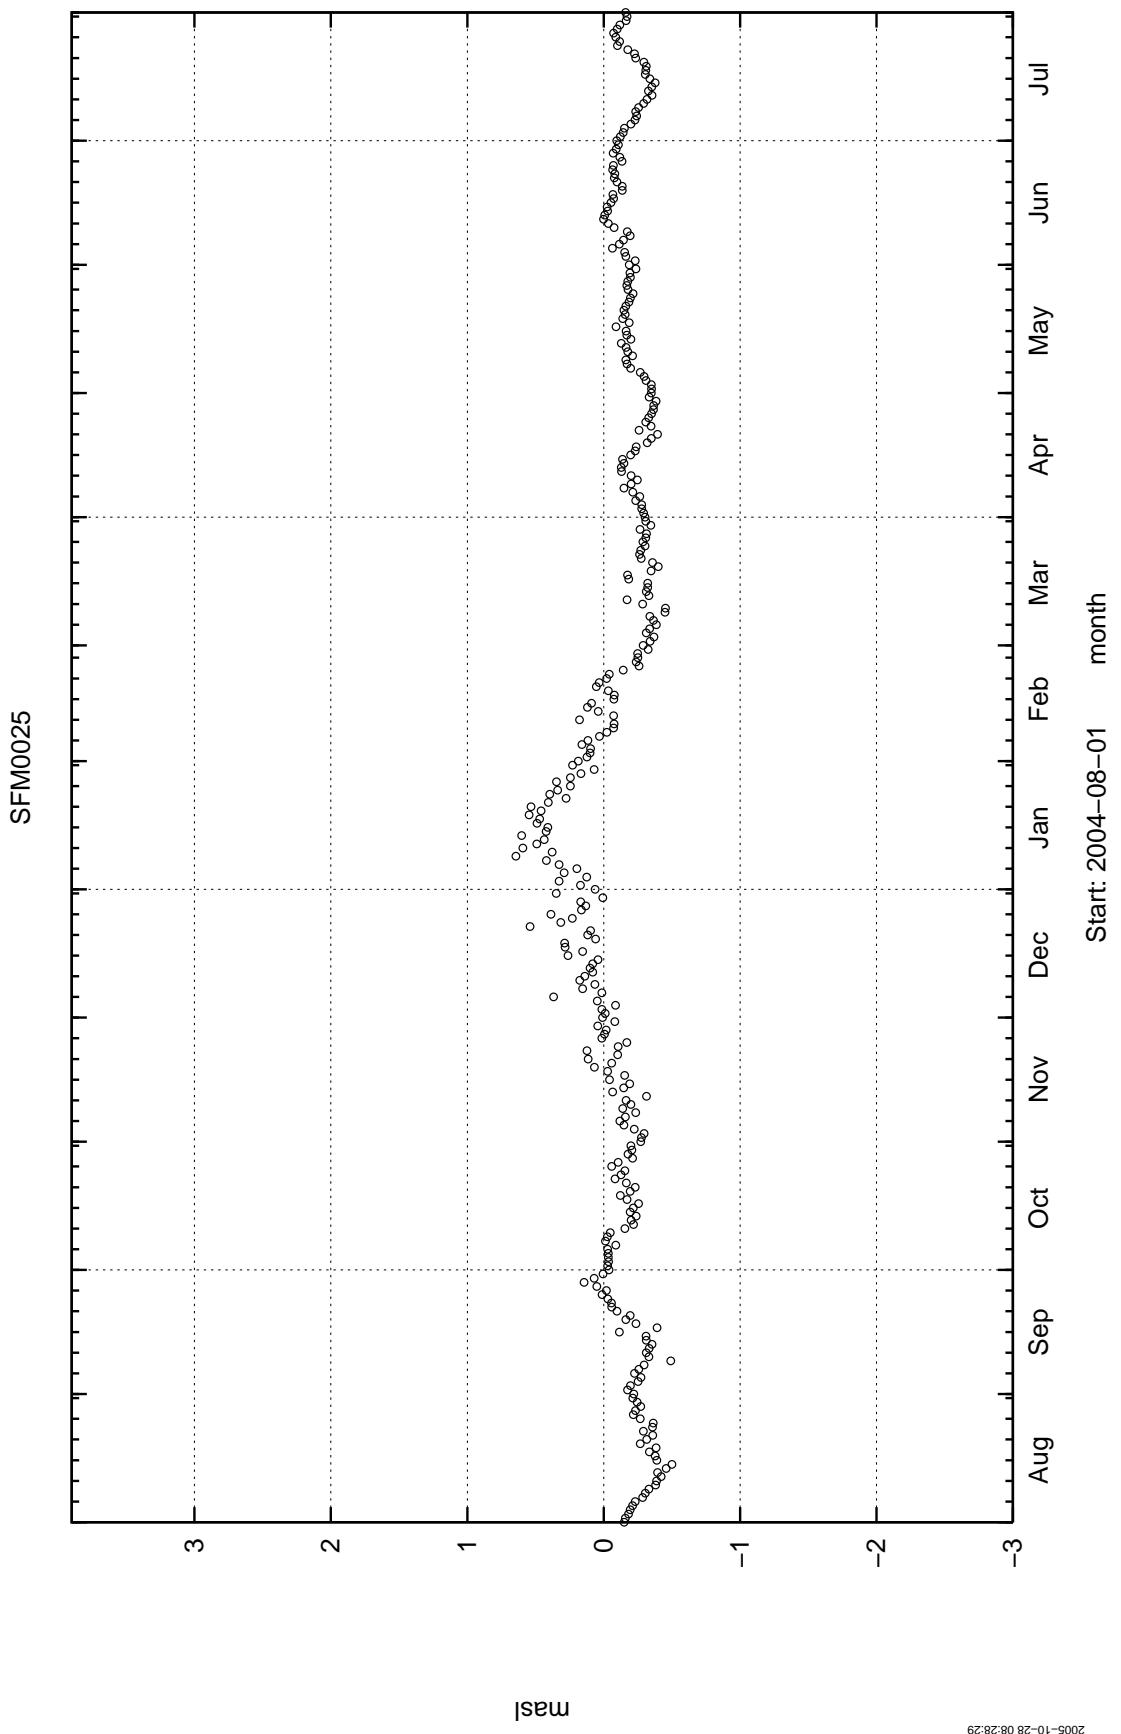


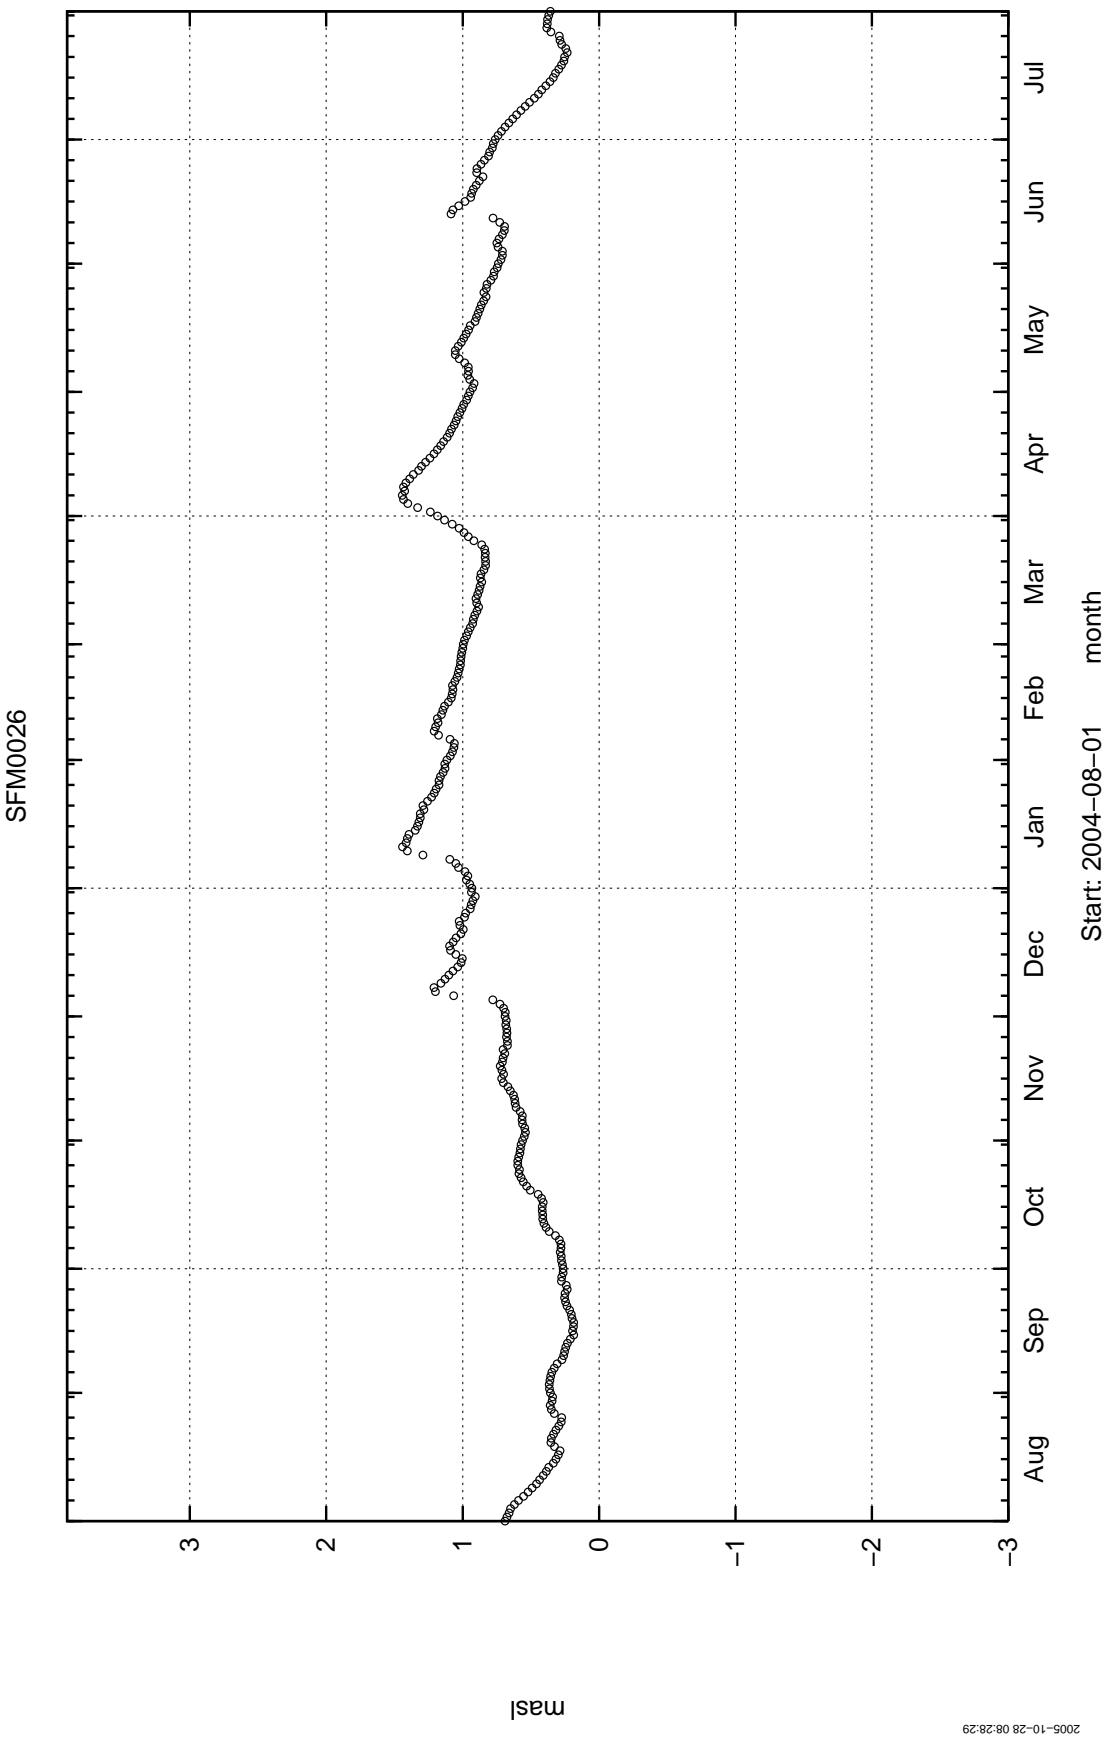

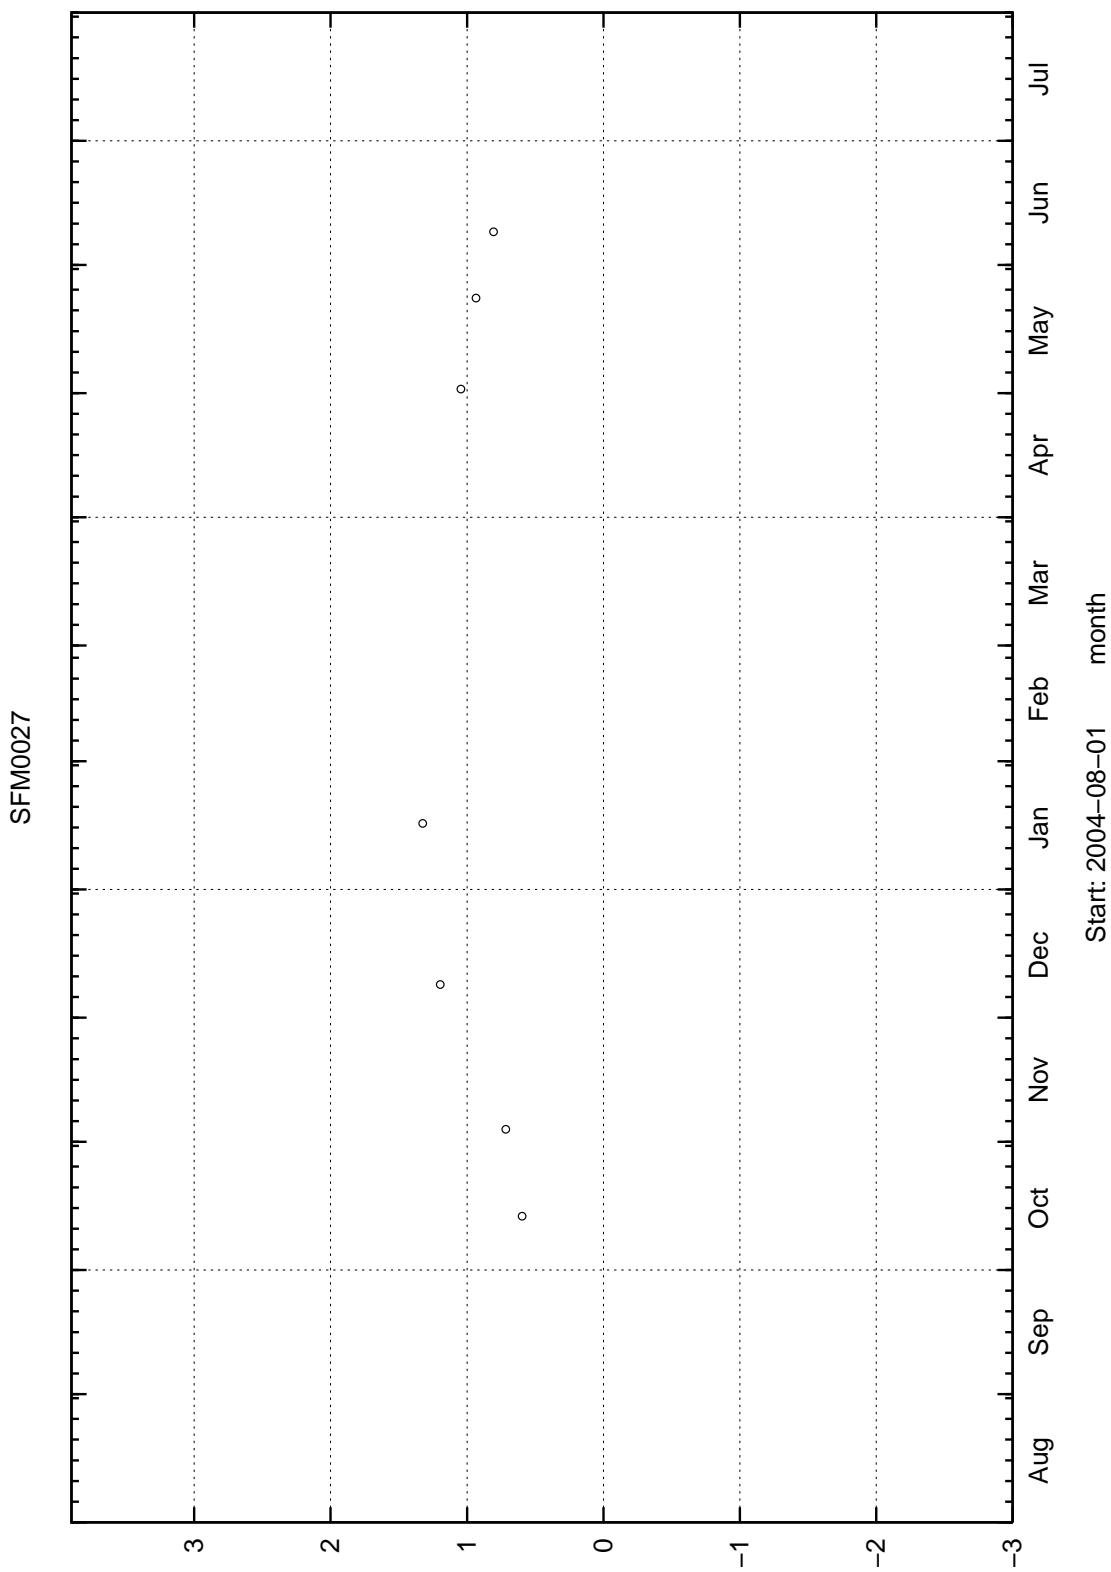


2005-10-28 08:28:30


SFM0028

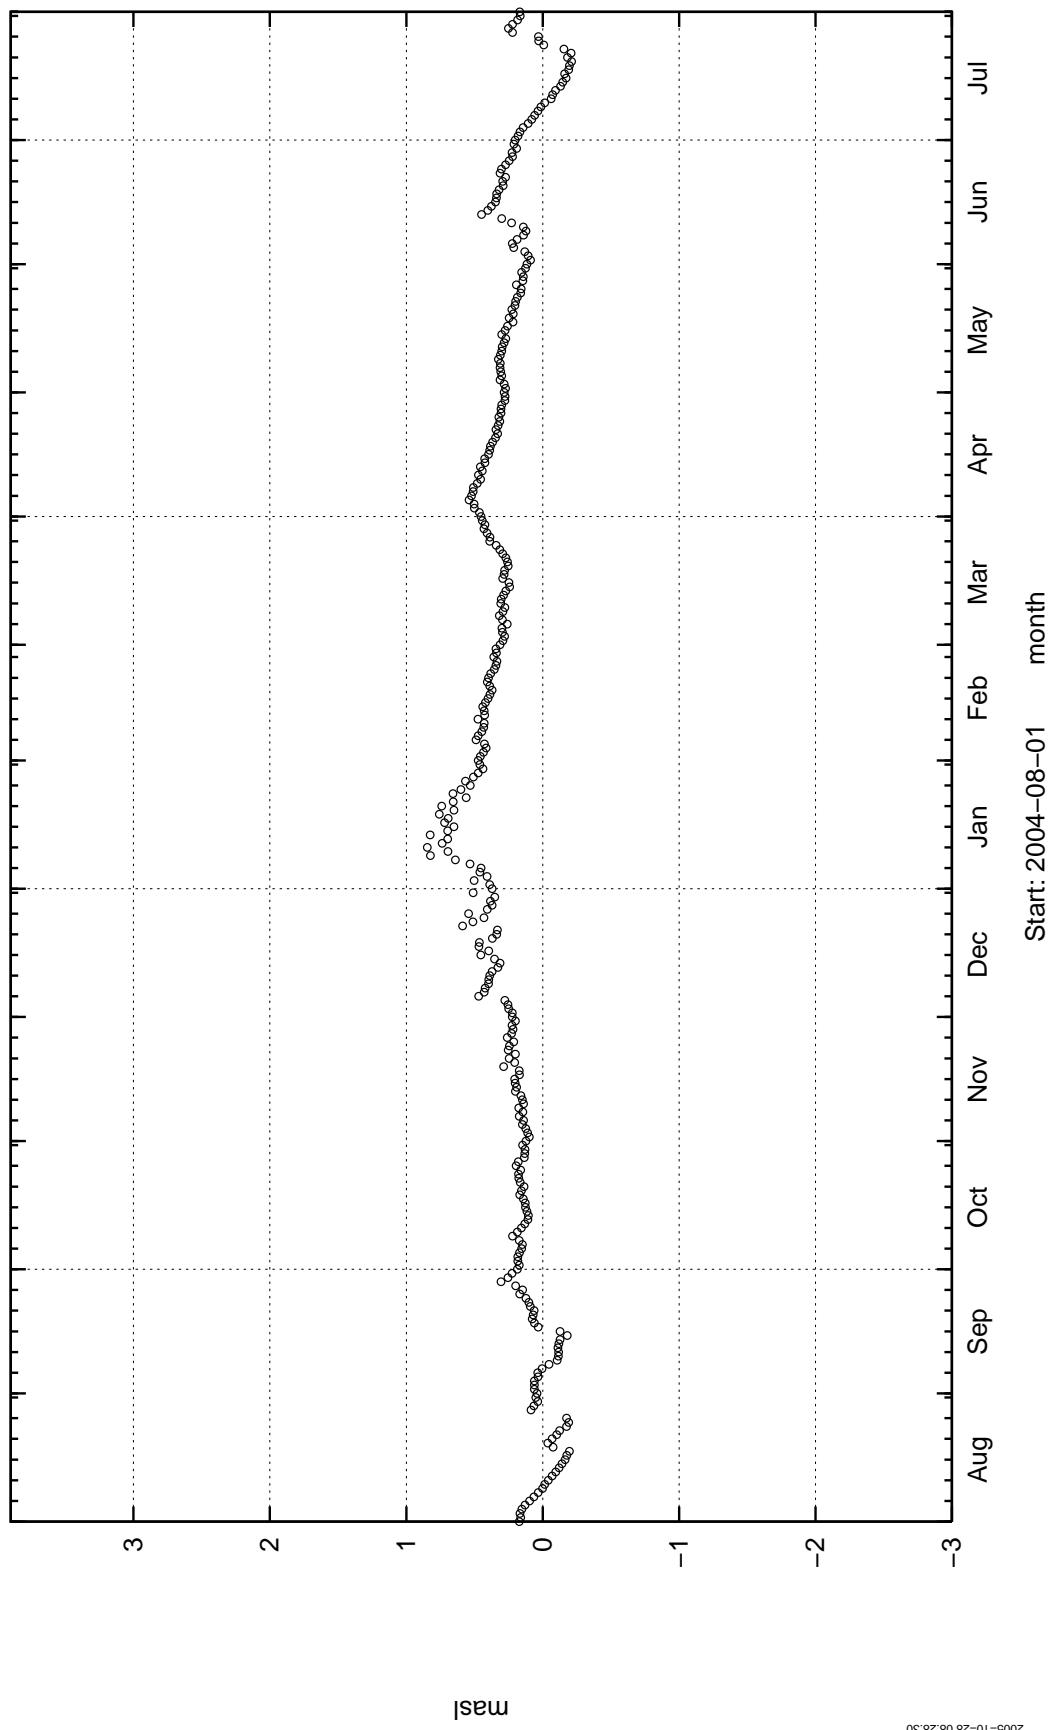


2005-10-26 06:28:30

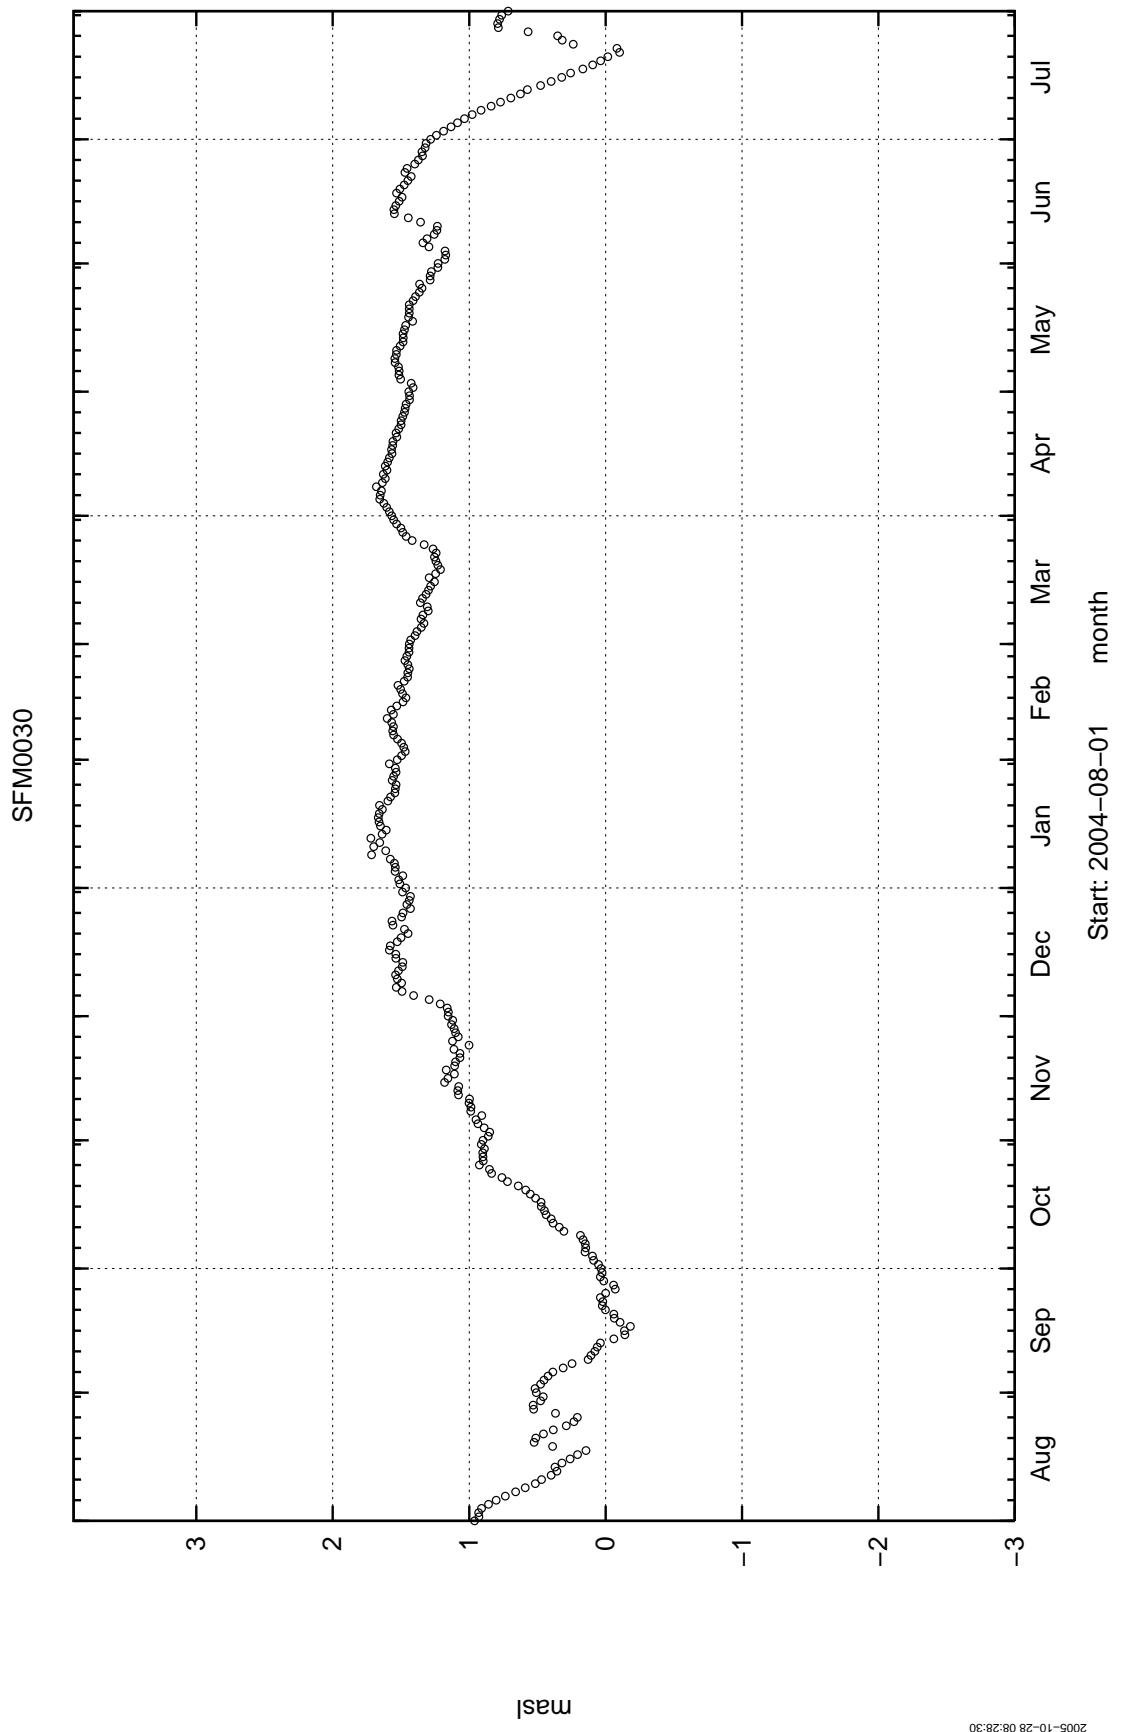


SFM0033

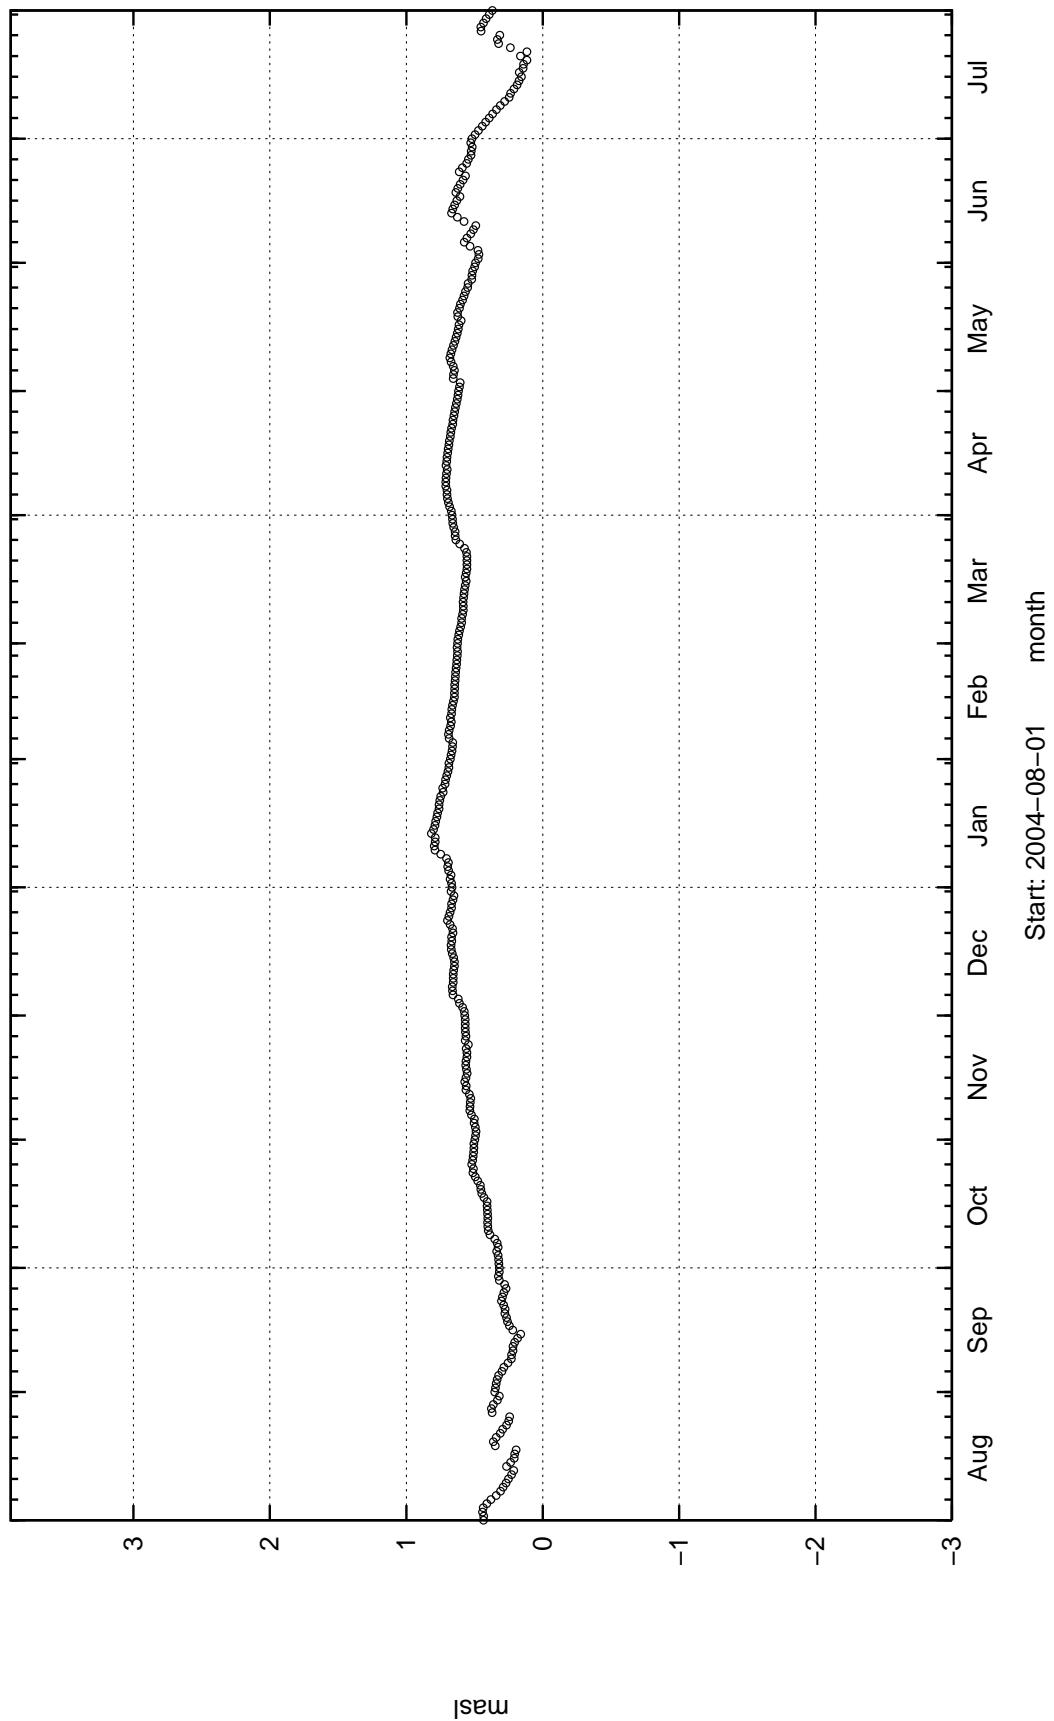


2005-10-28 08:28:31

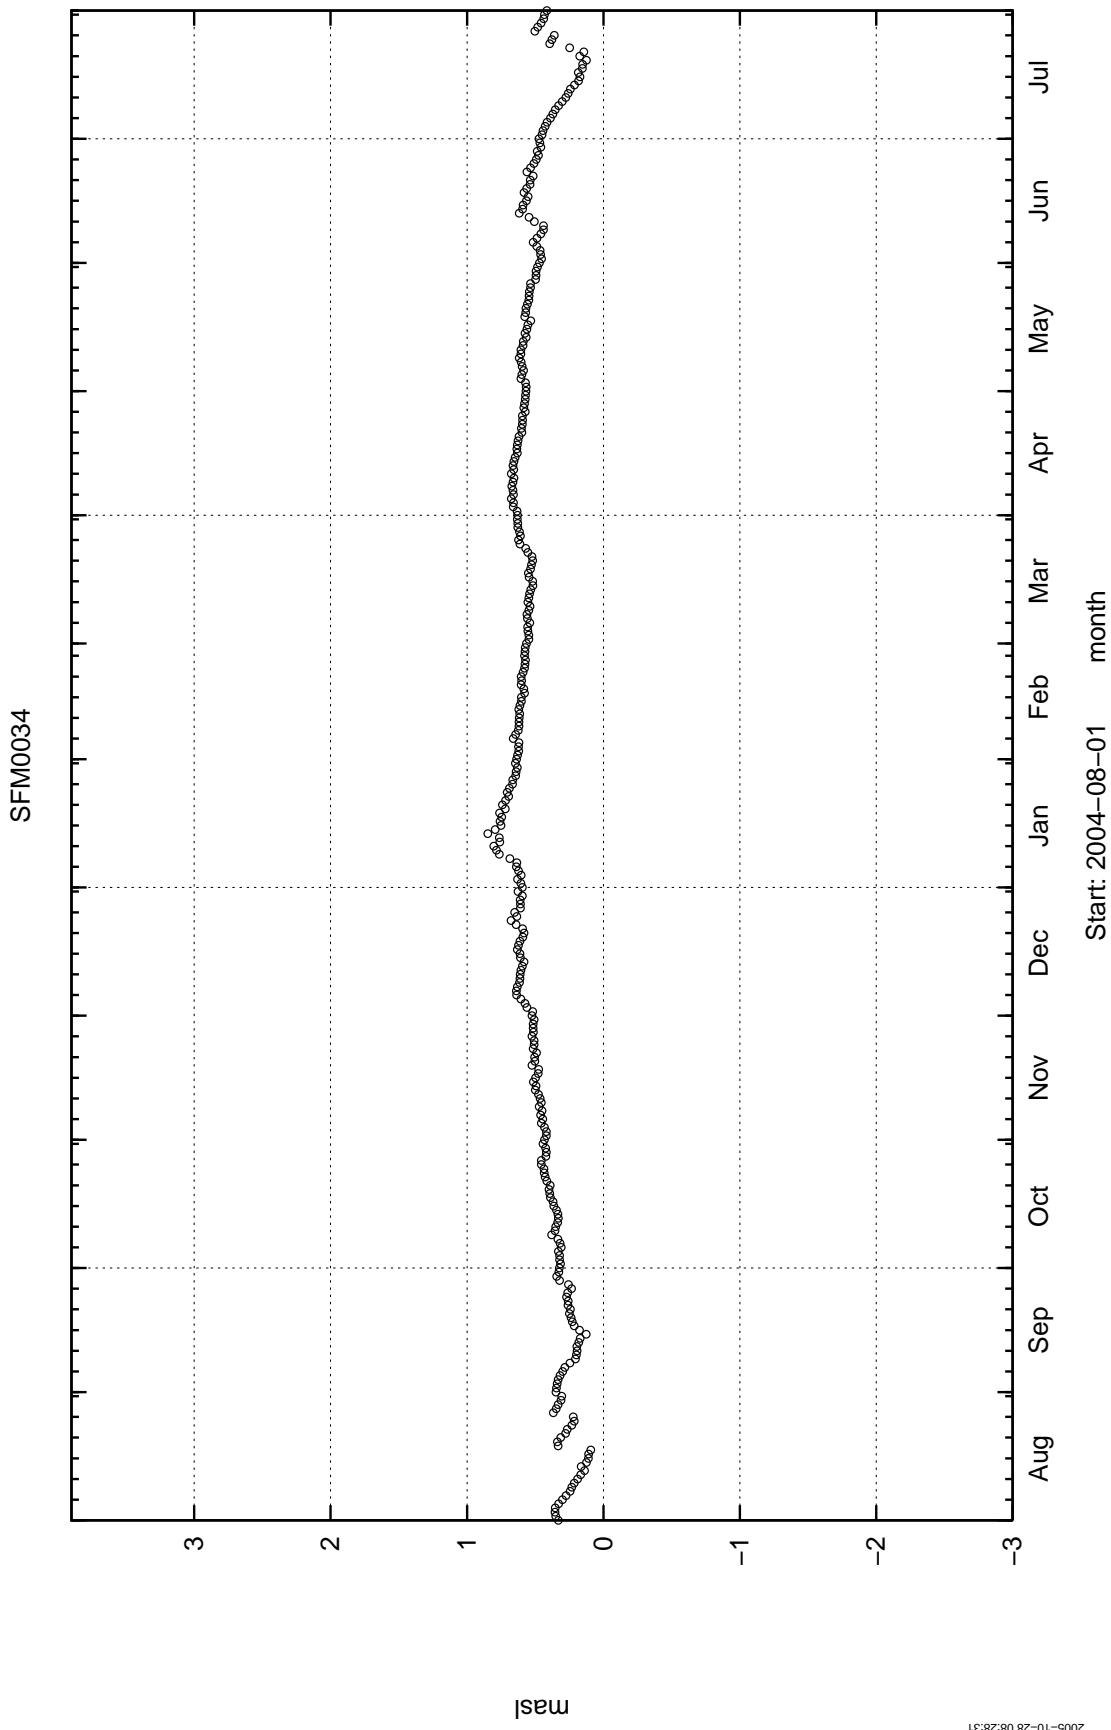



SFM0036

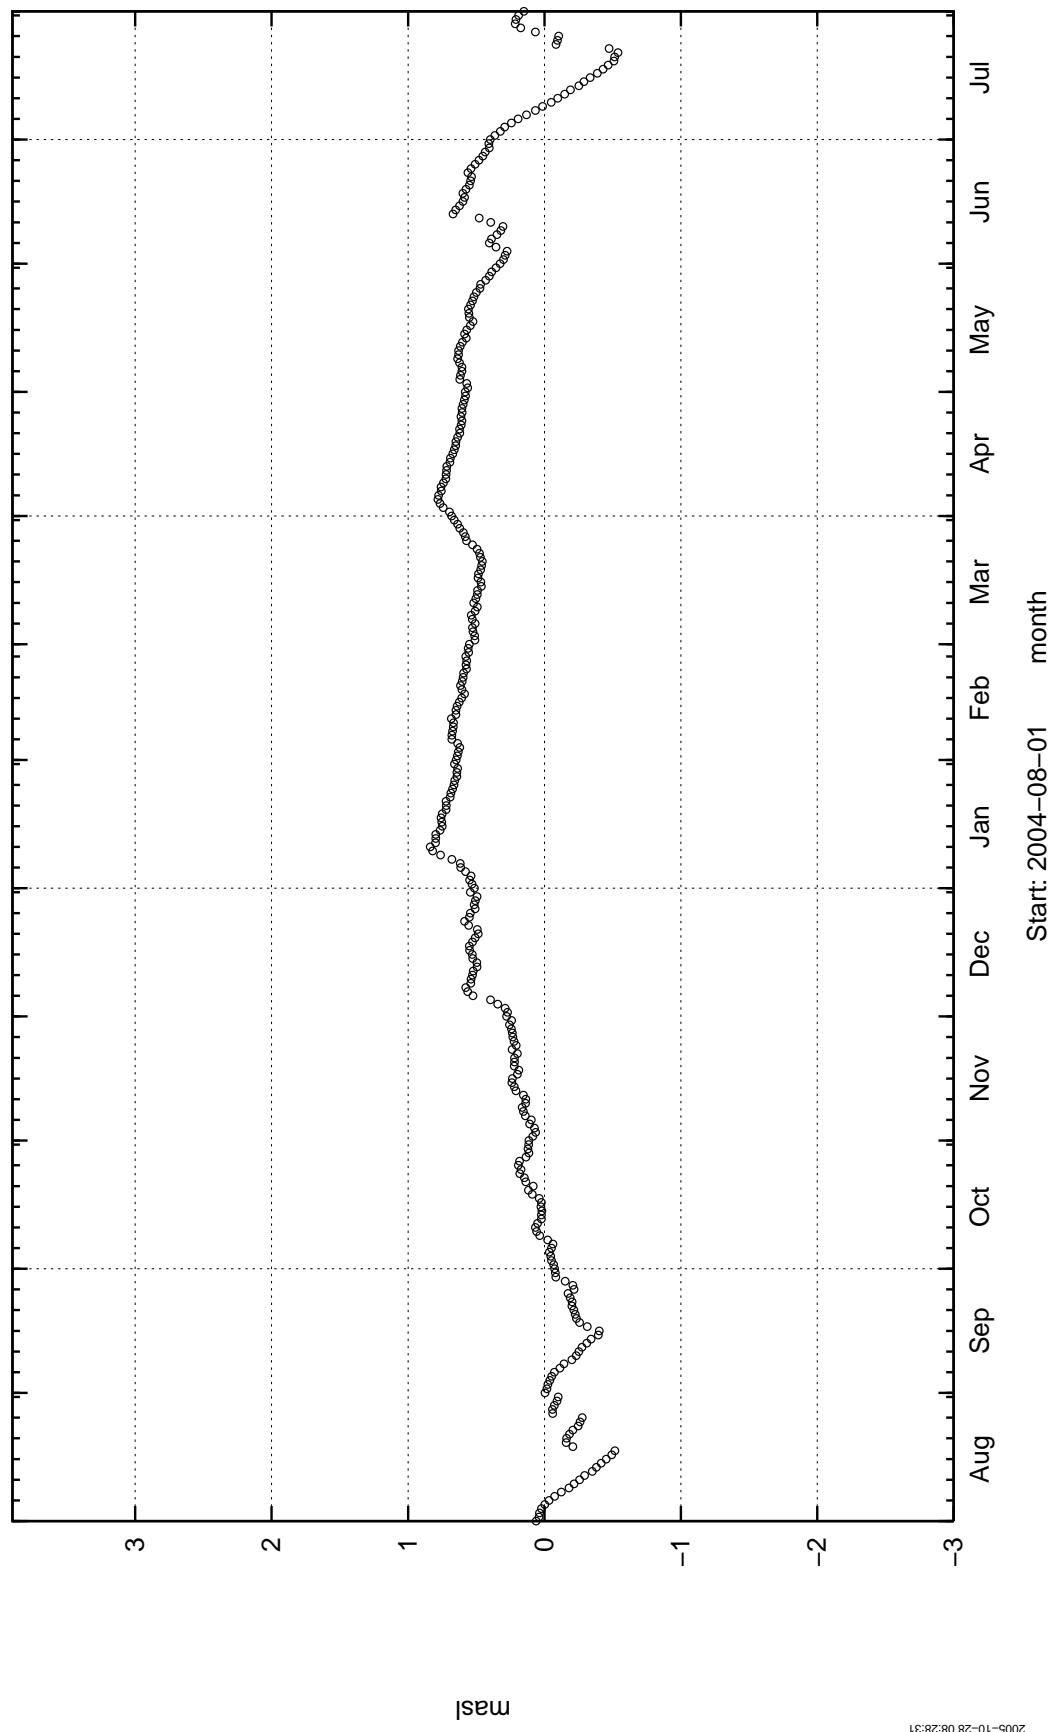


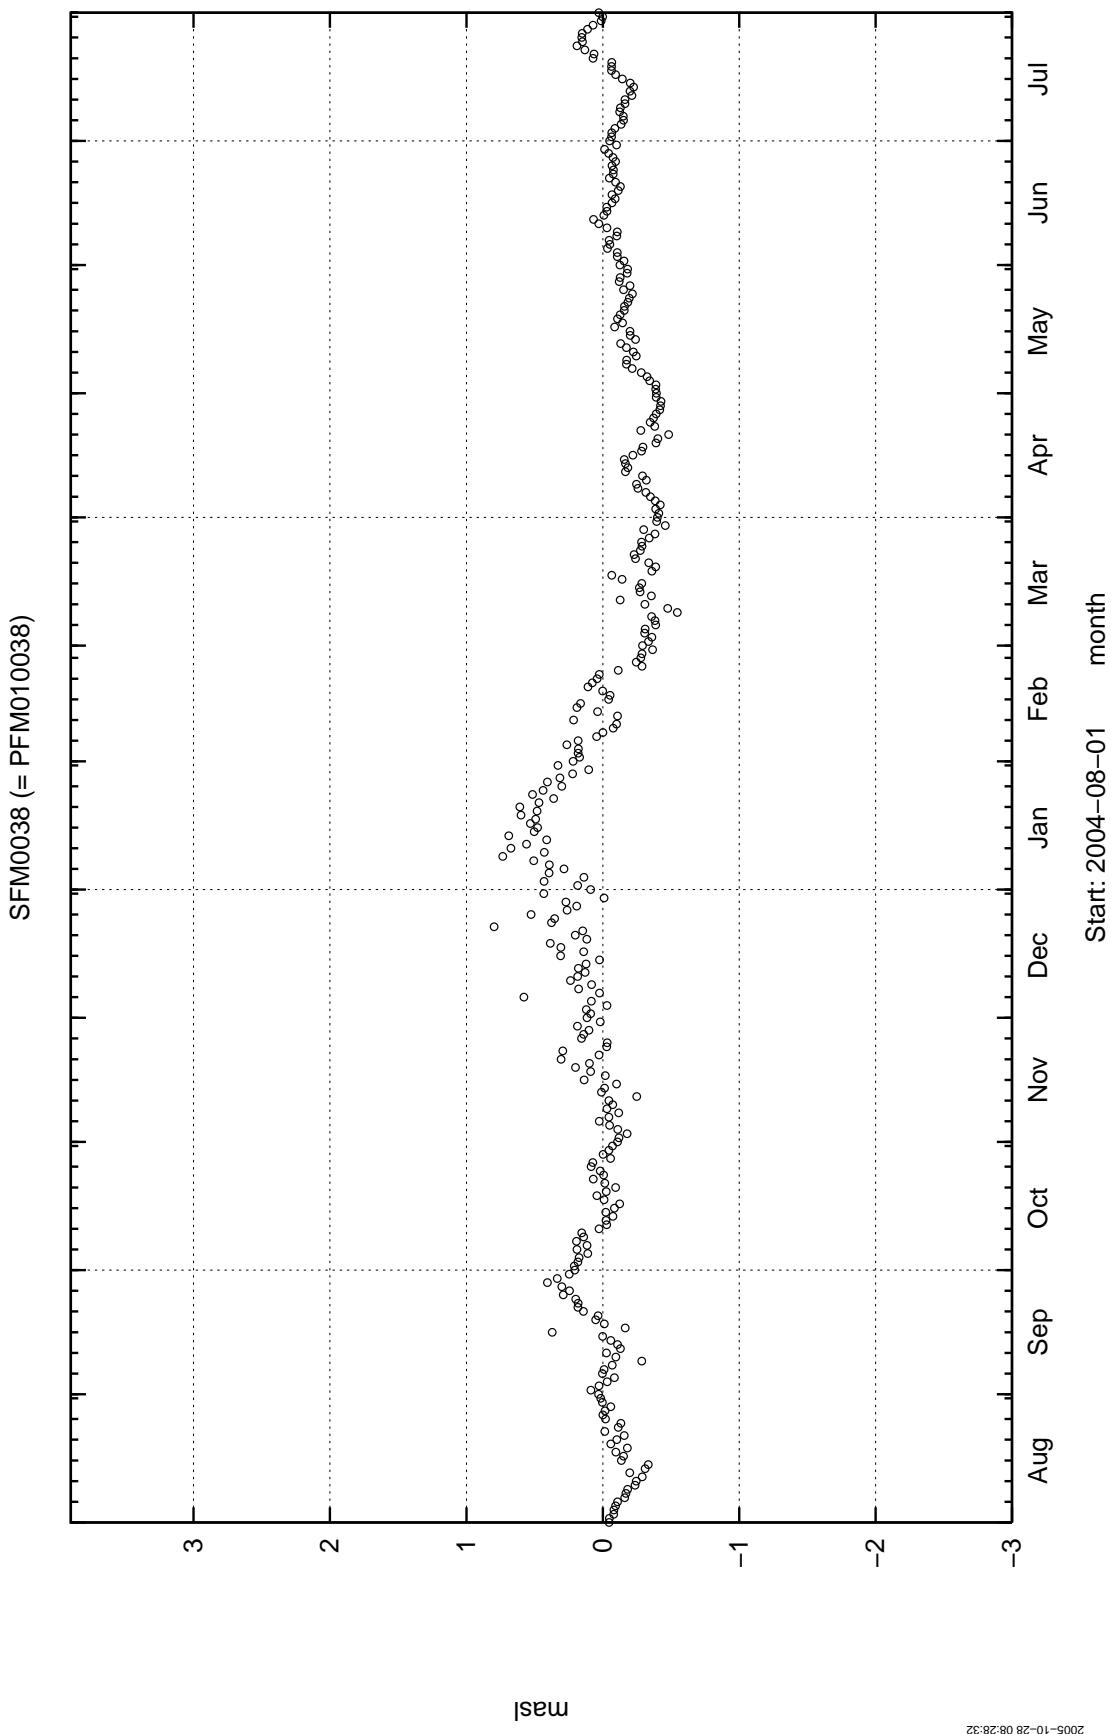



SFM0039

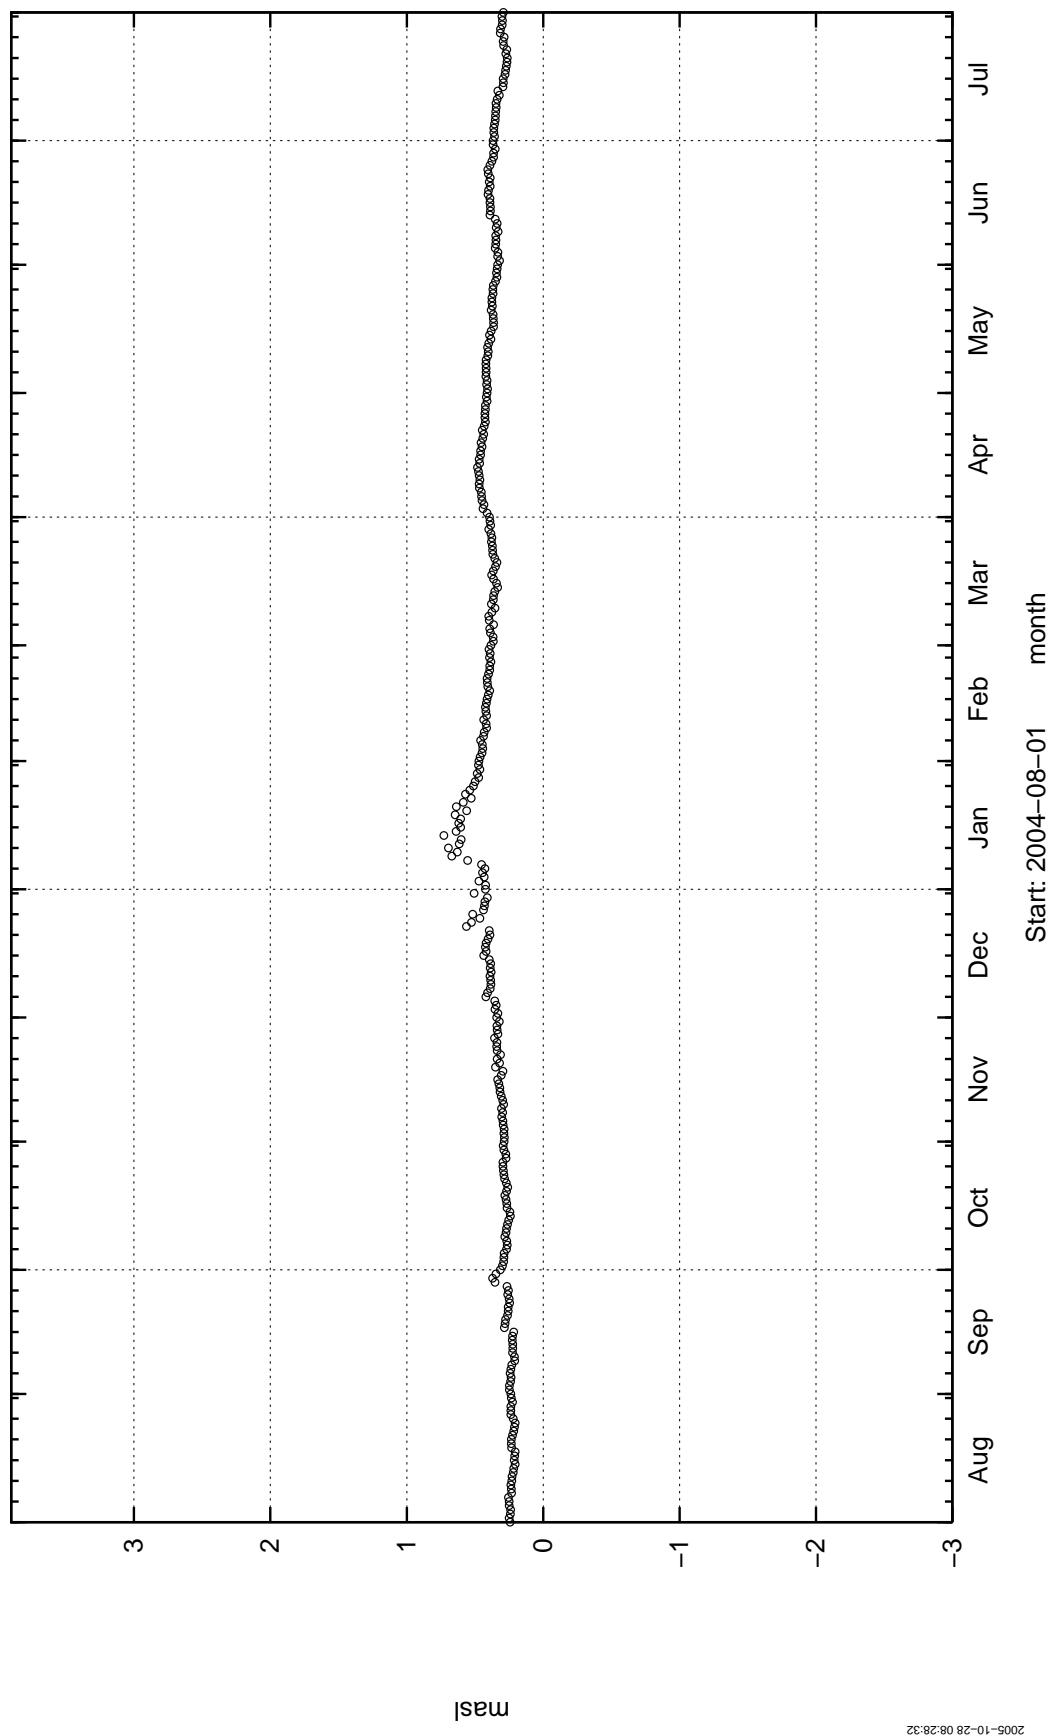


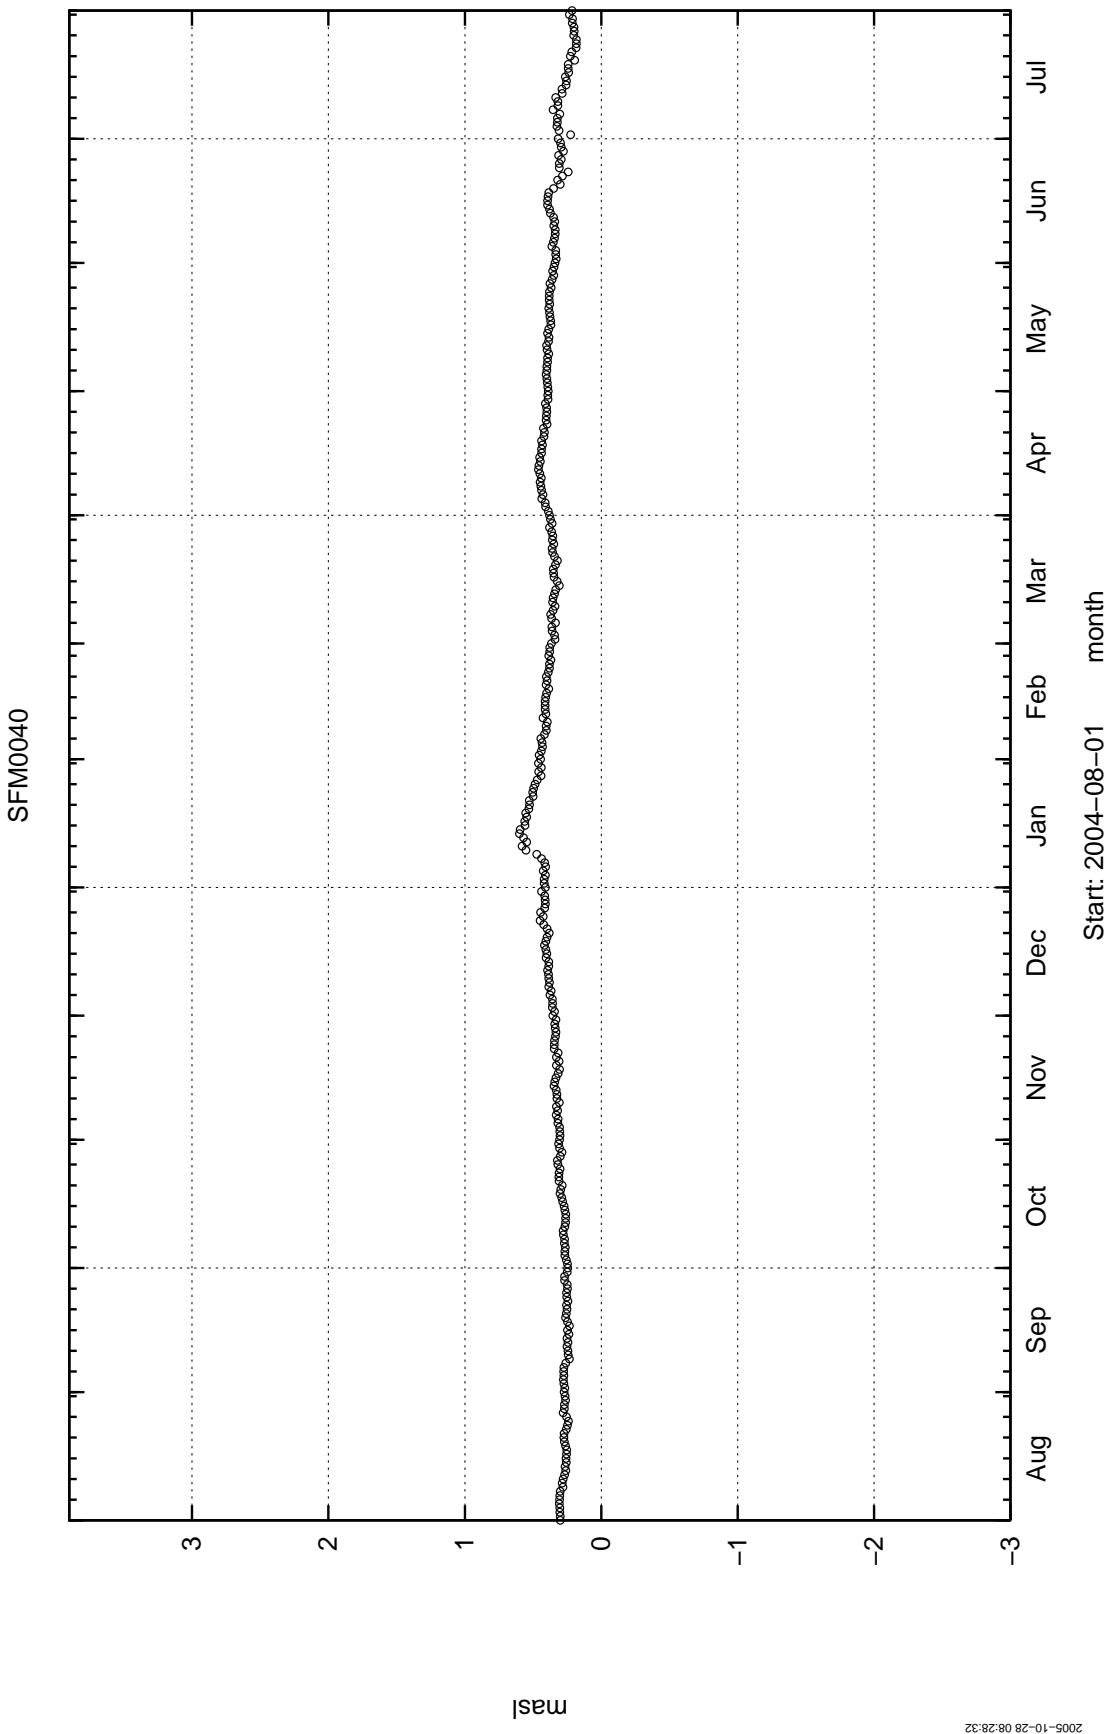

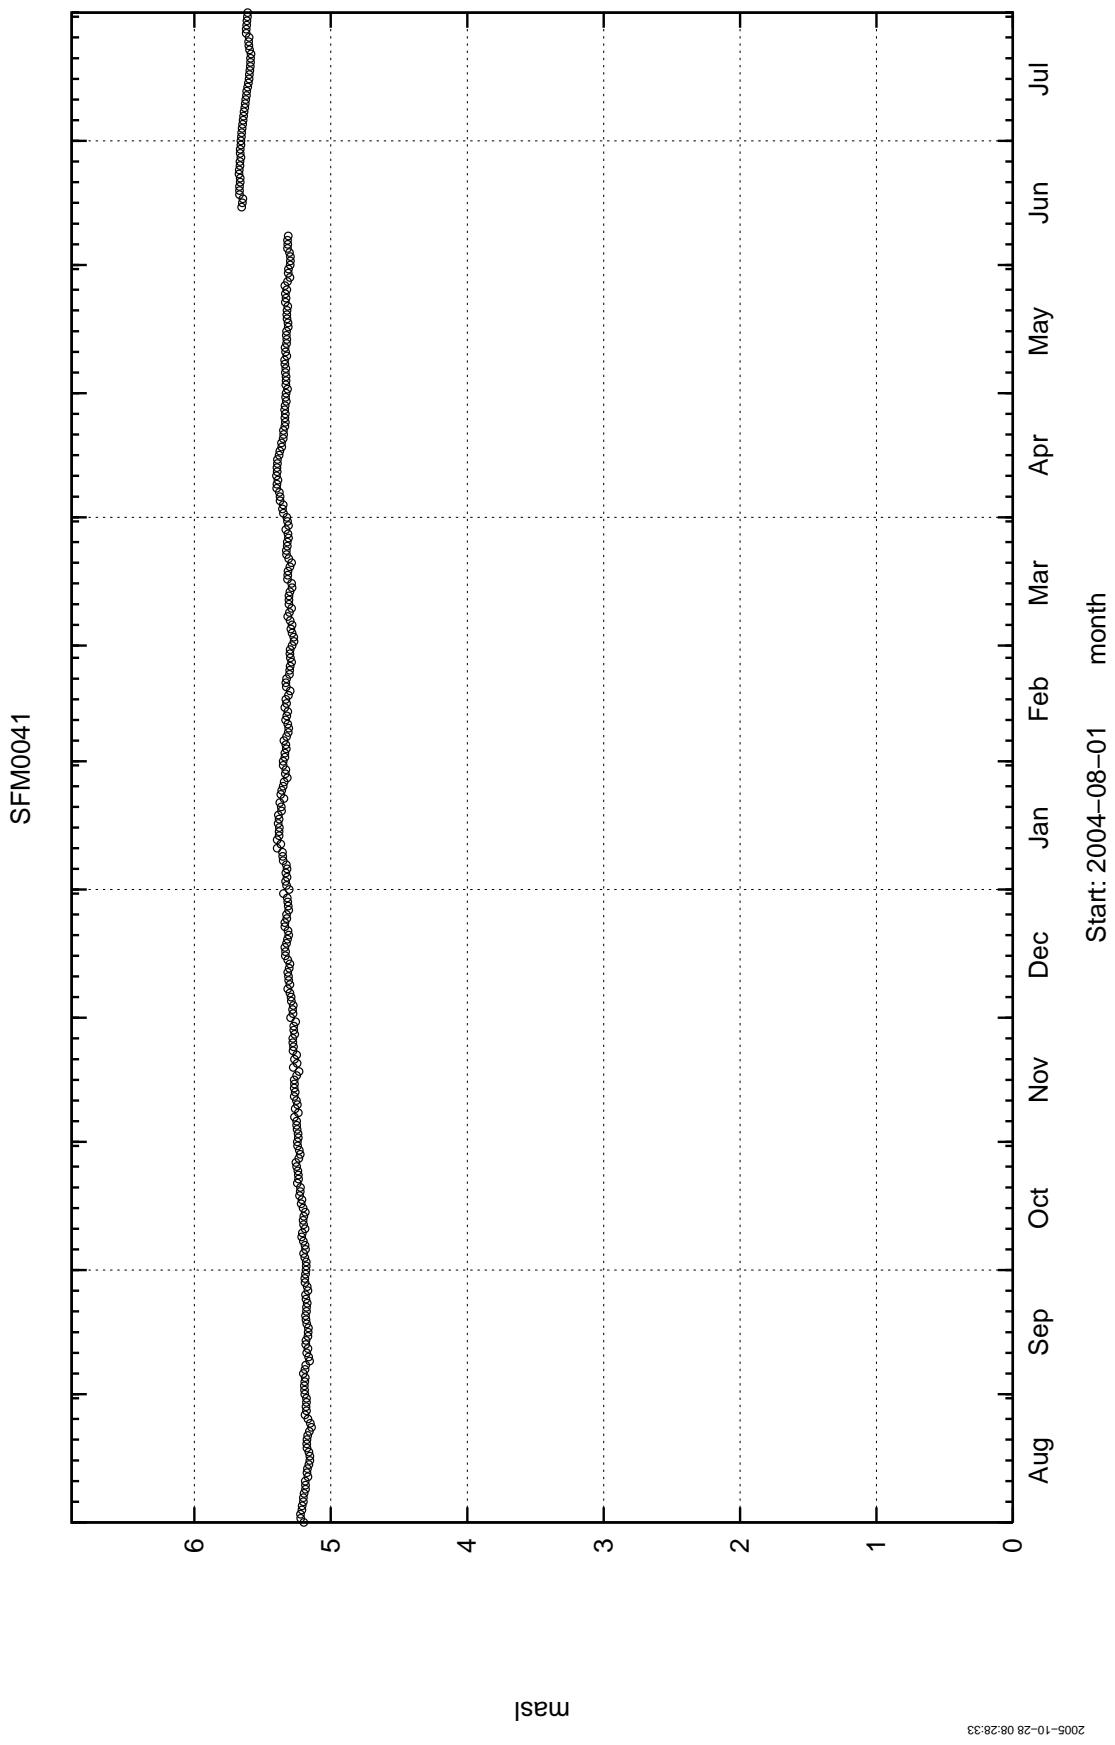


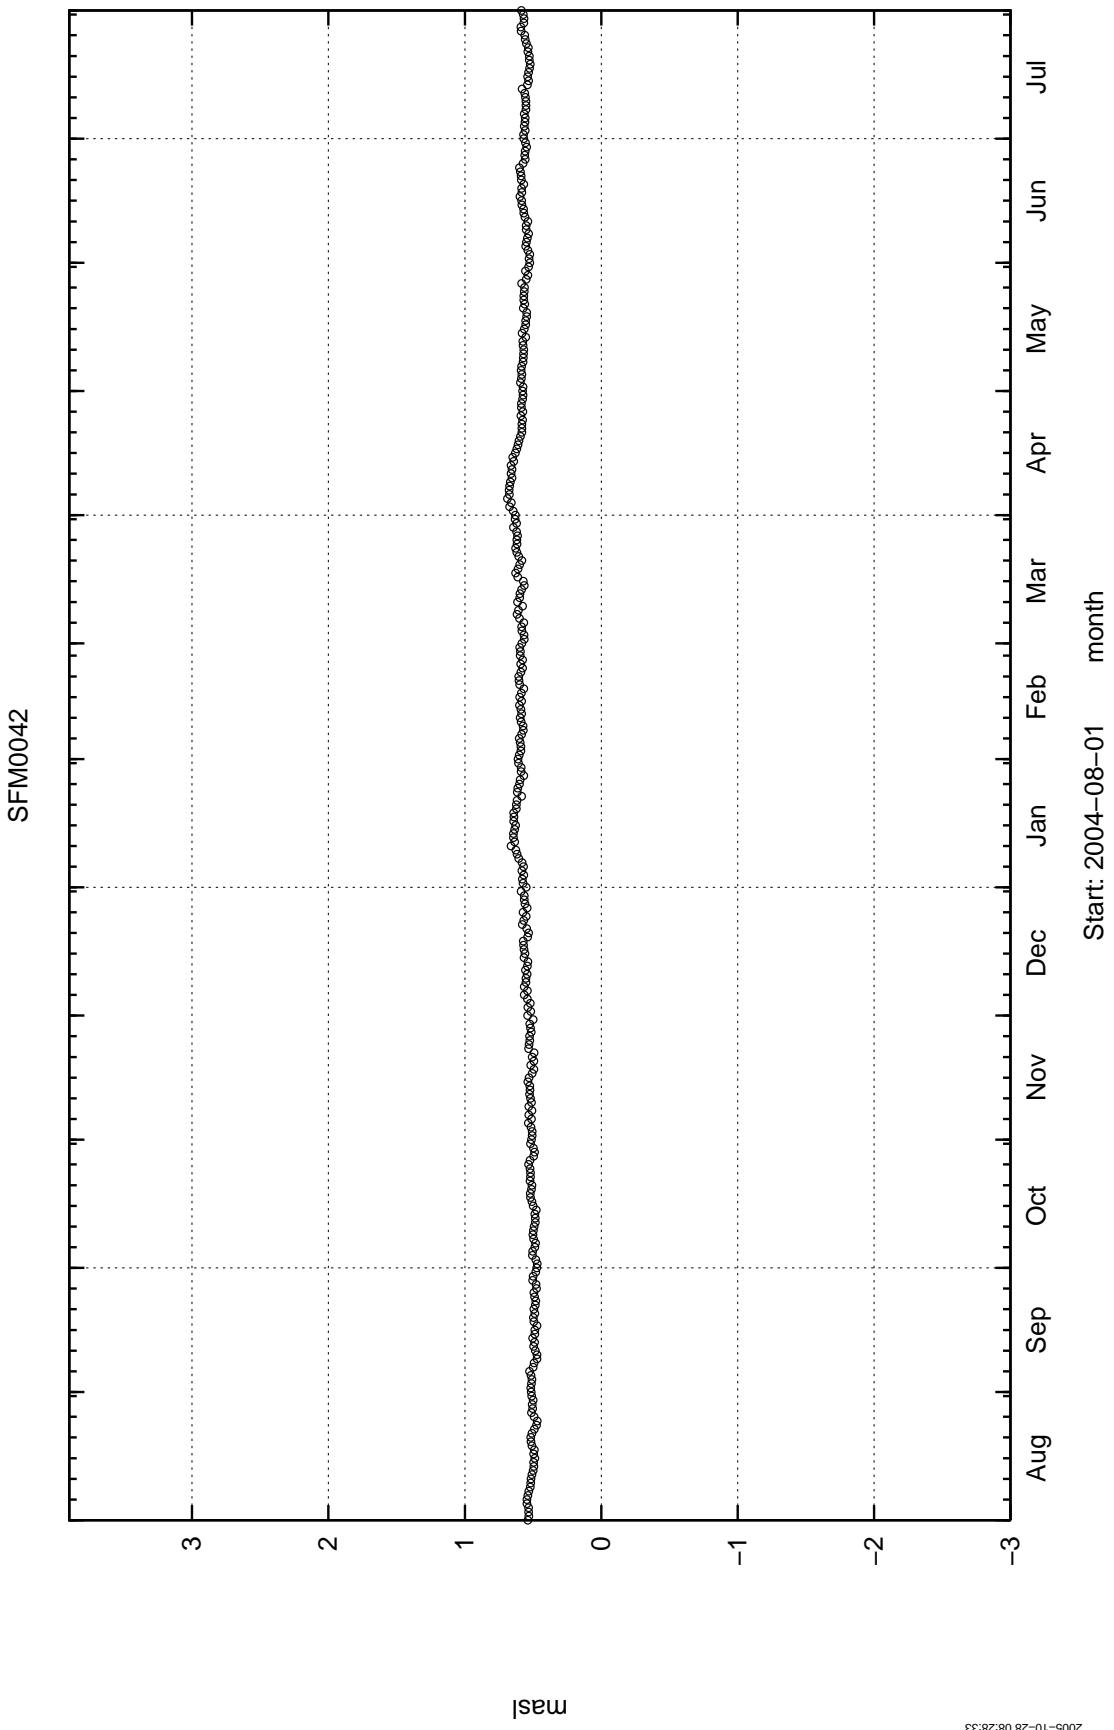


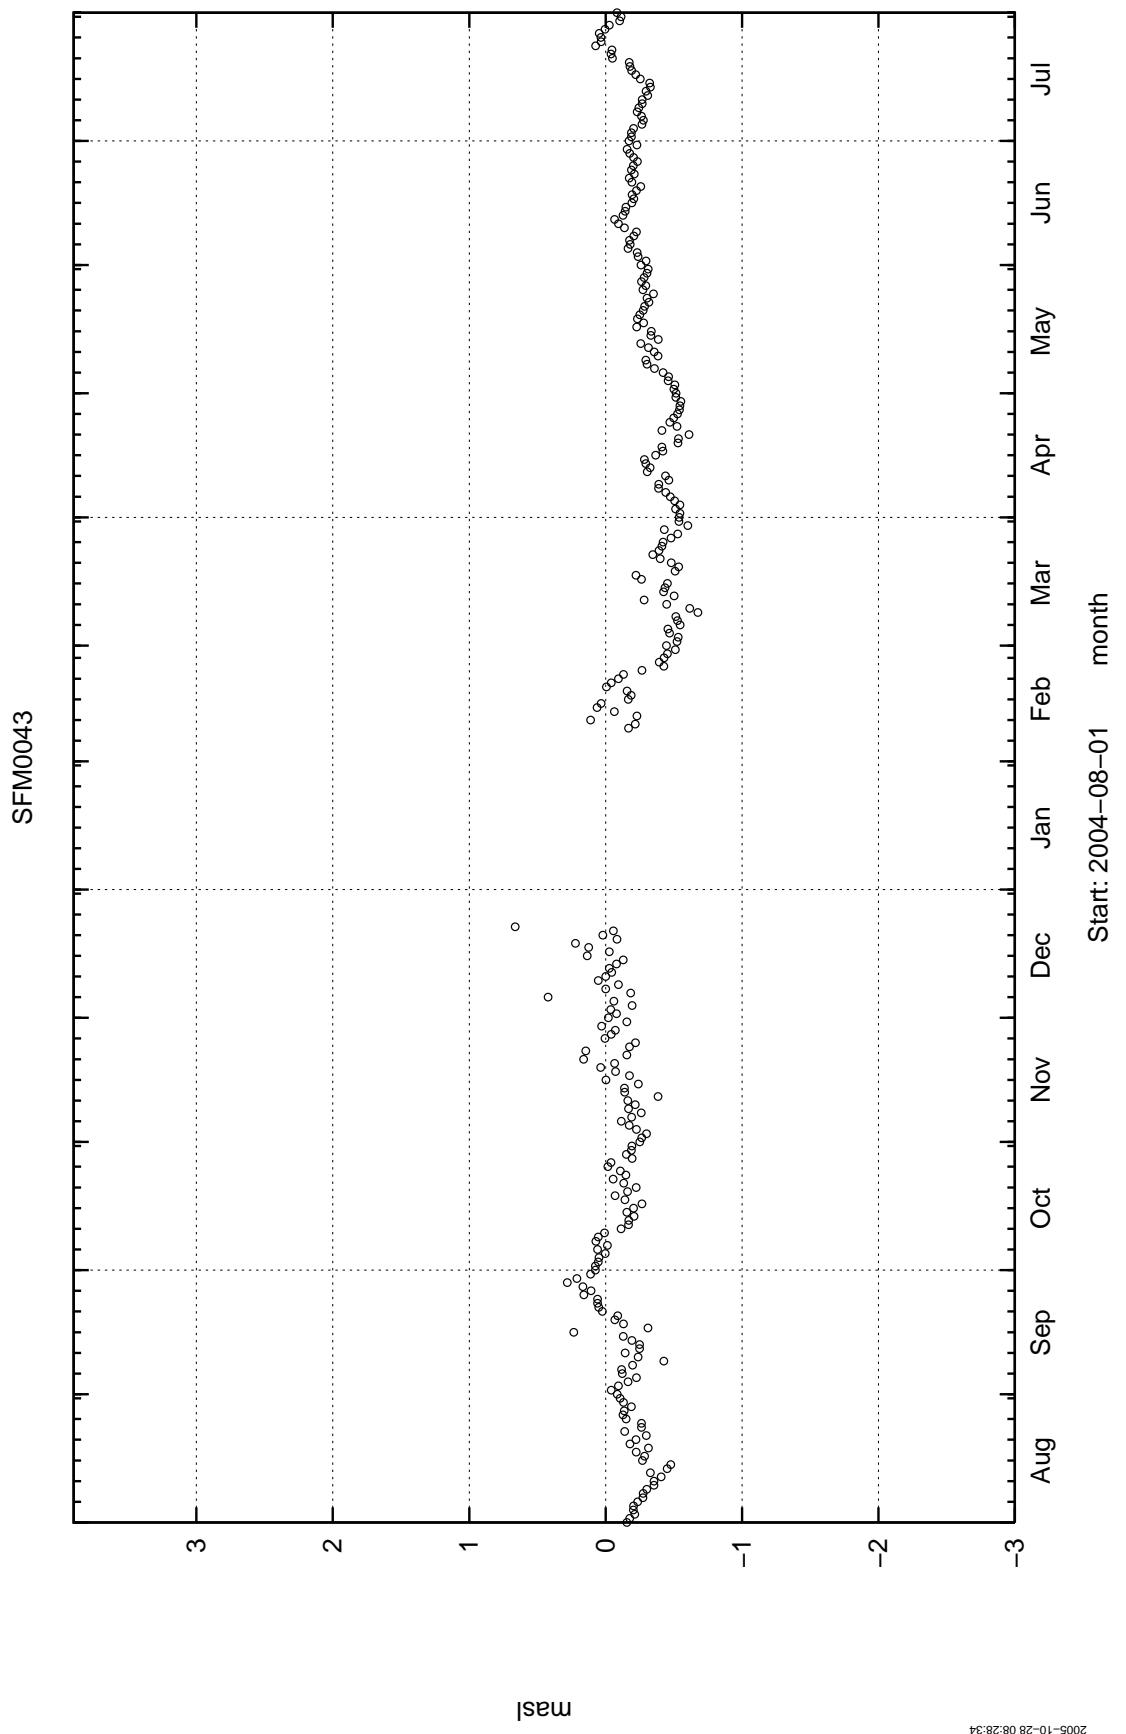


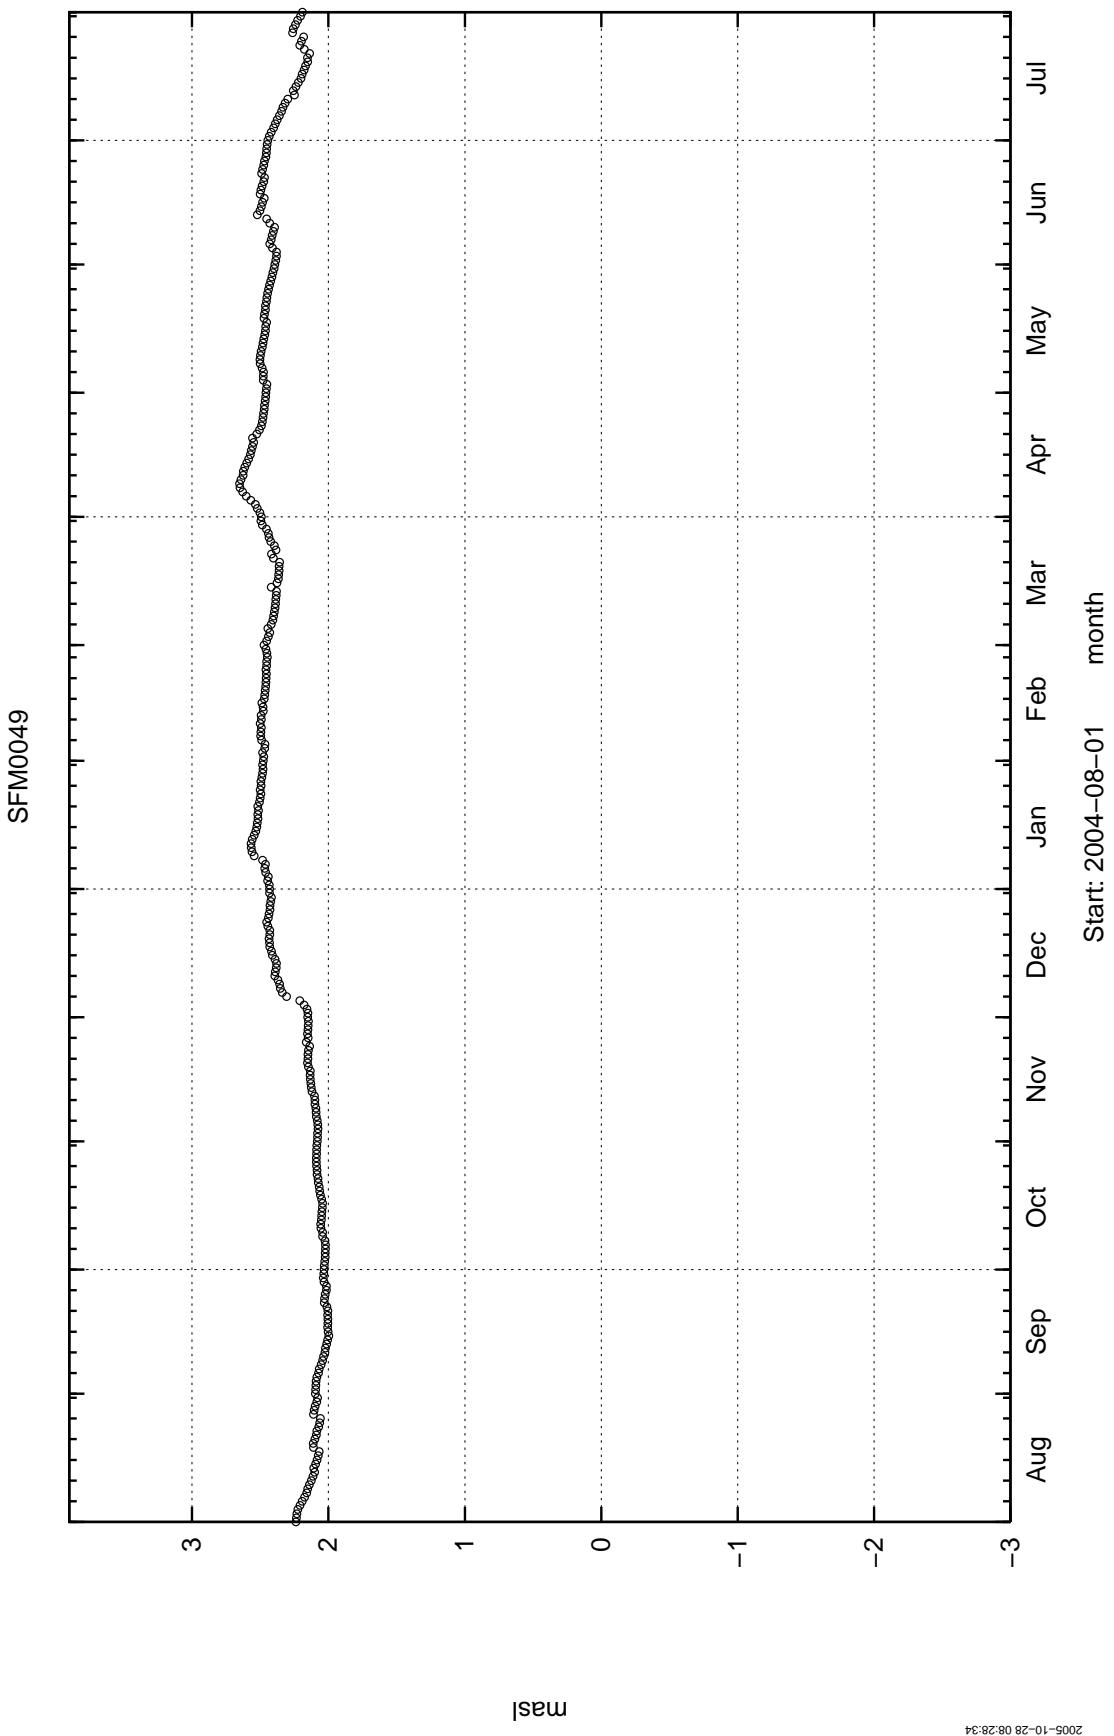



2005-10-28 08:28:34

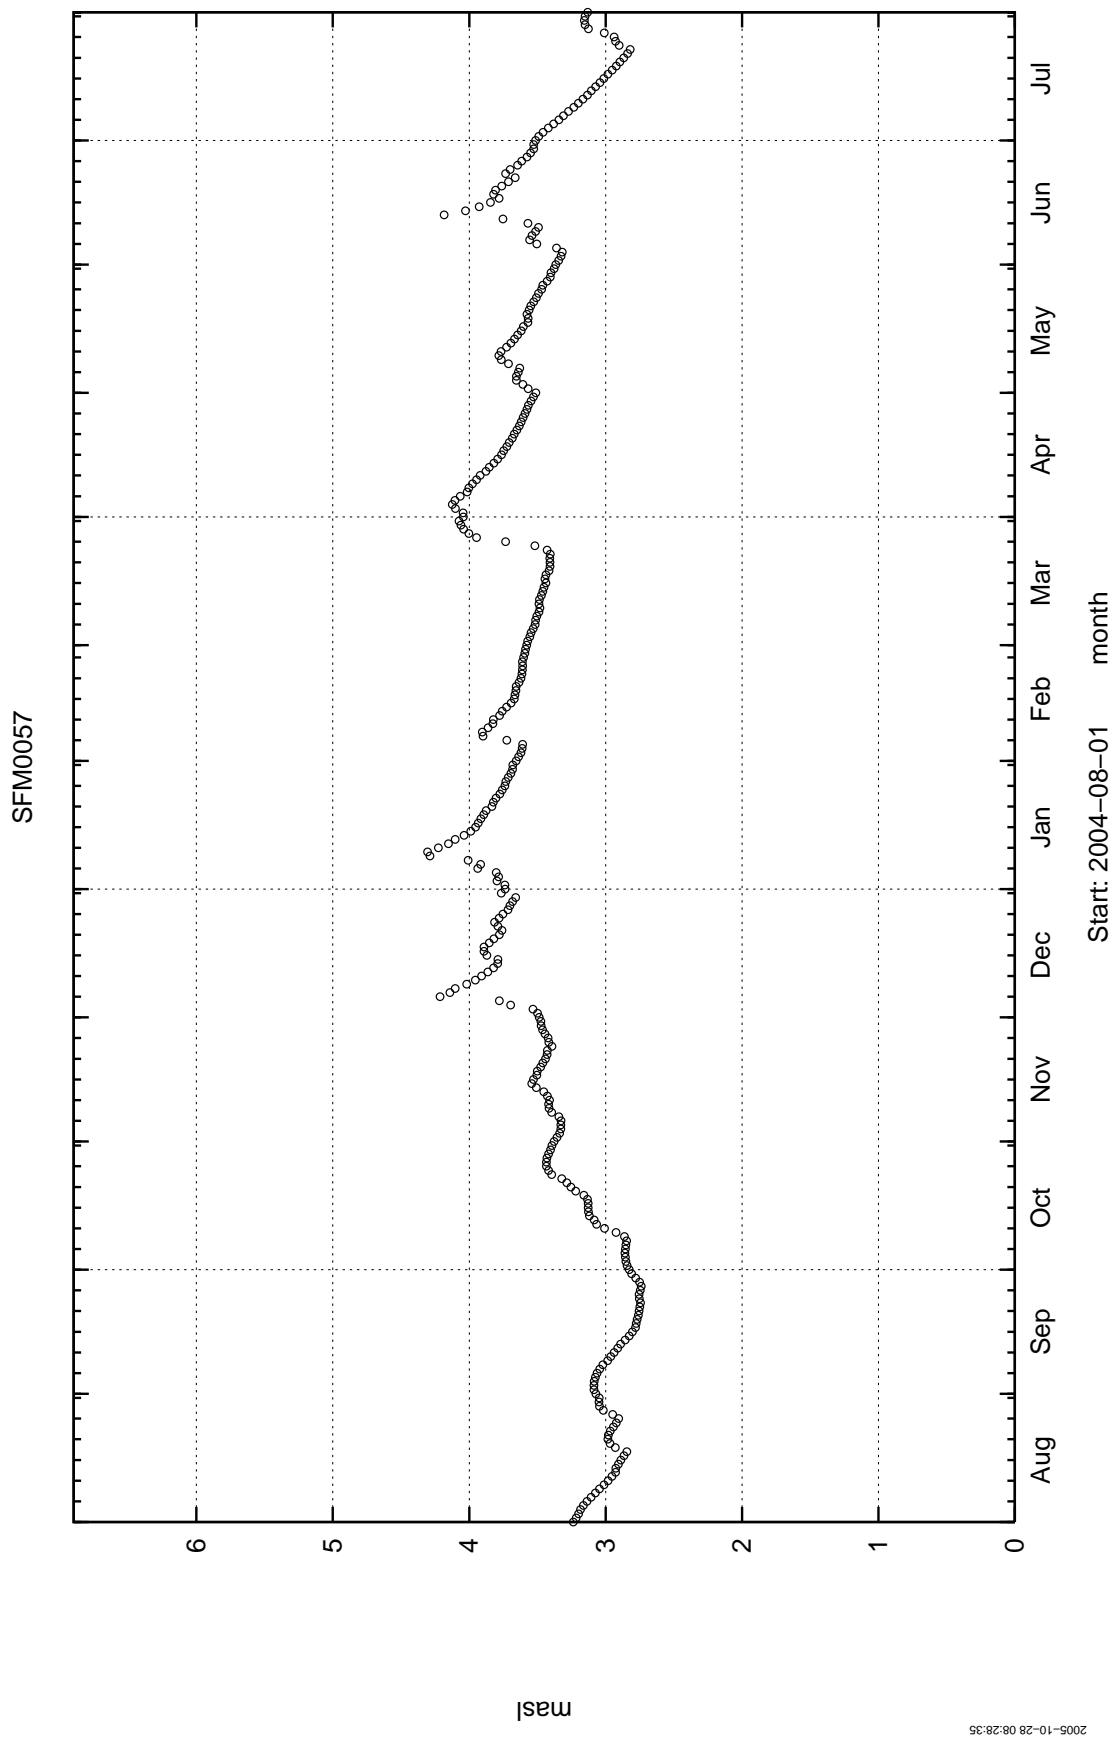


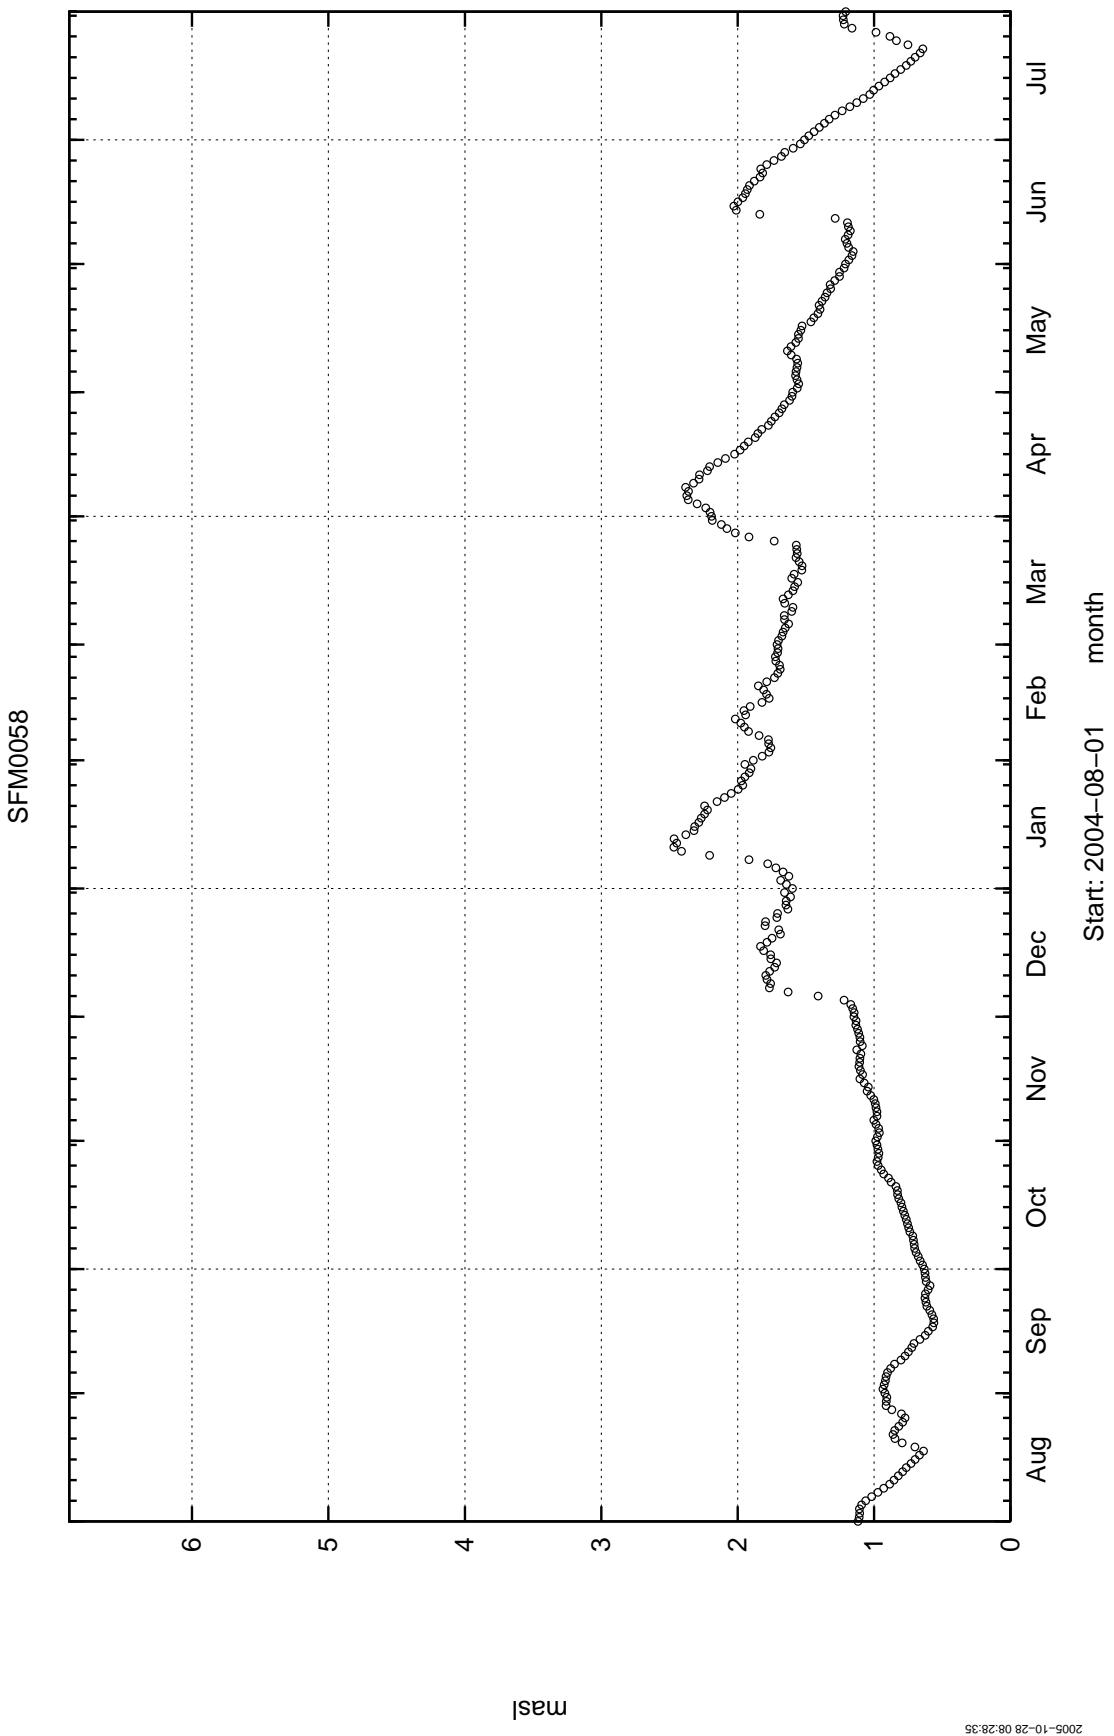


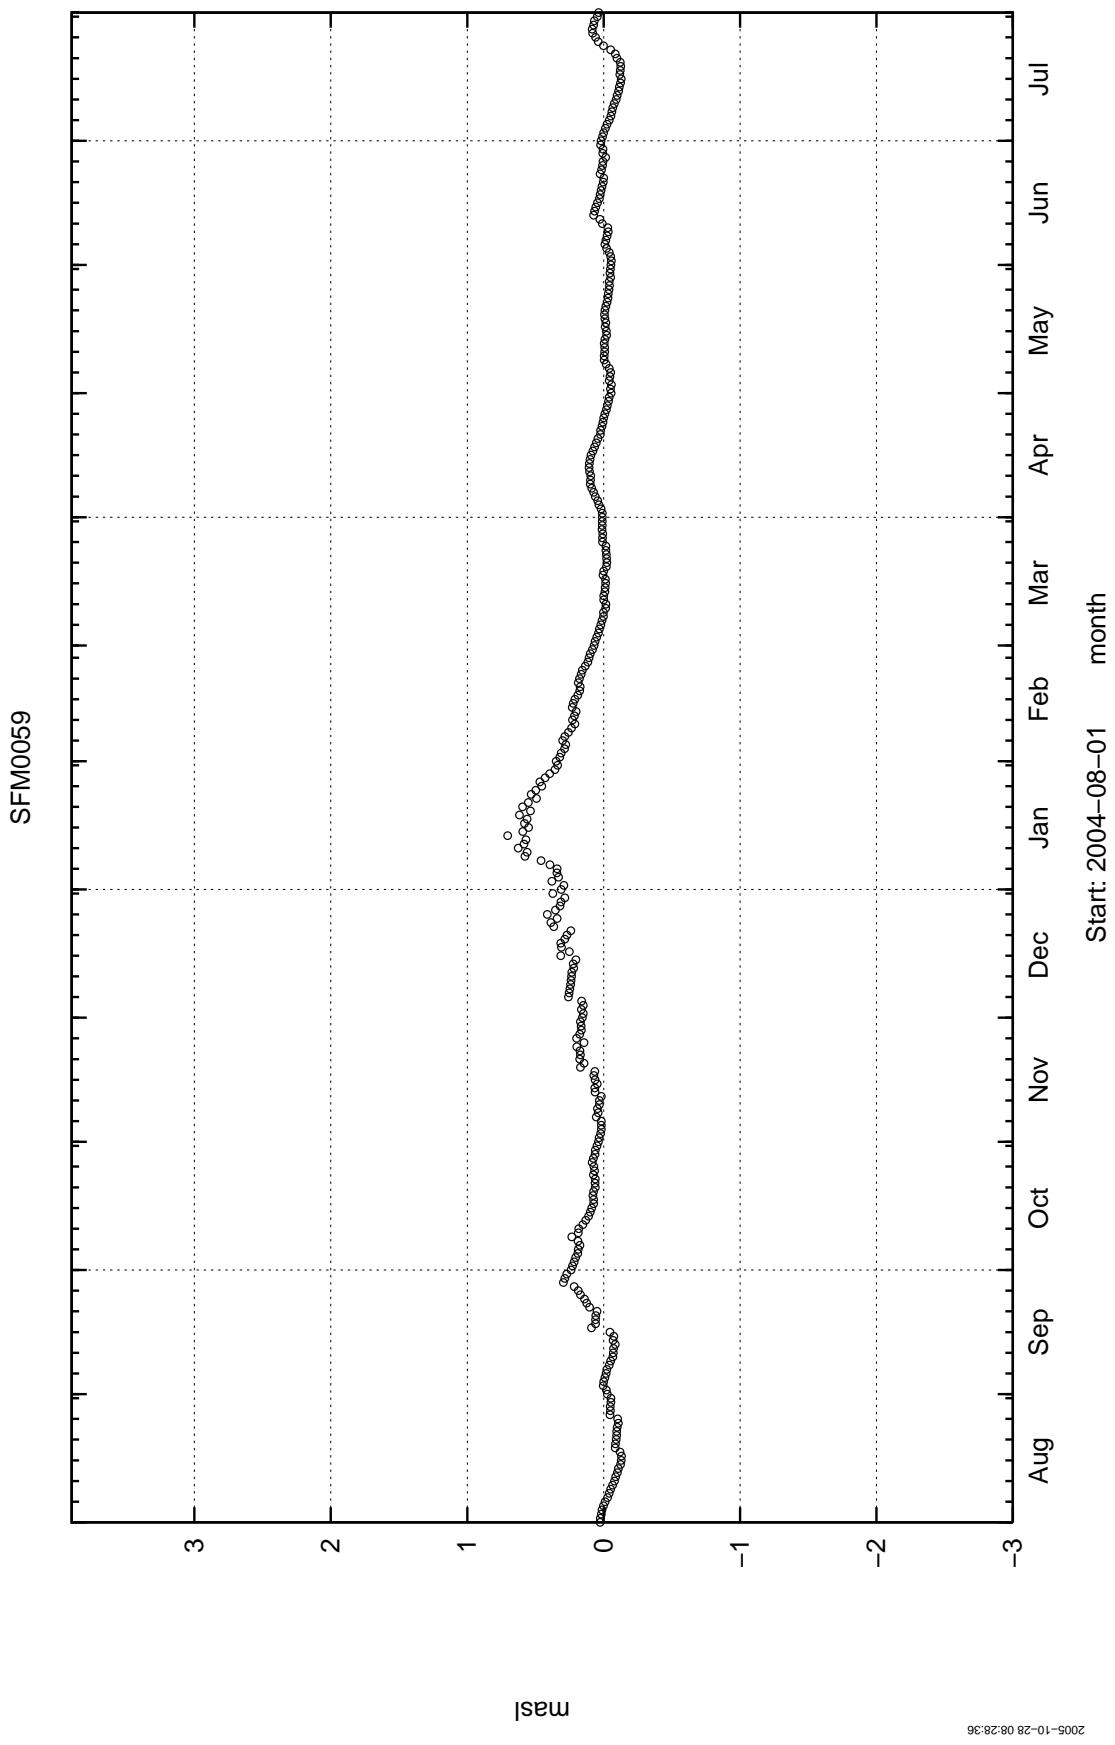

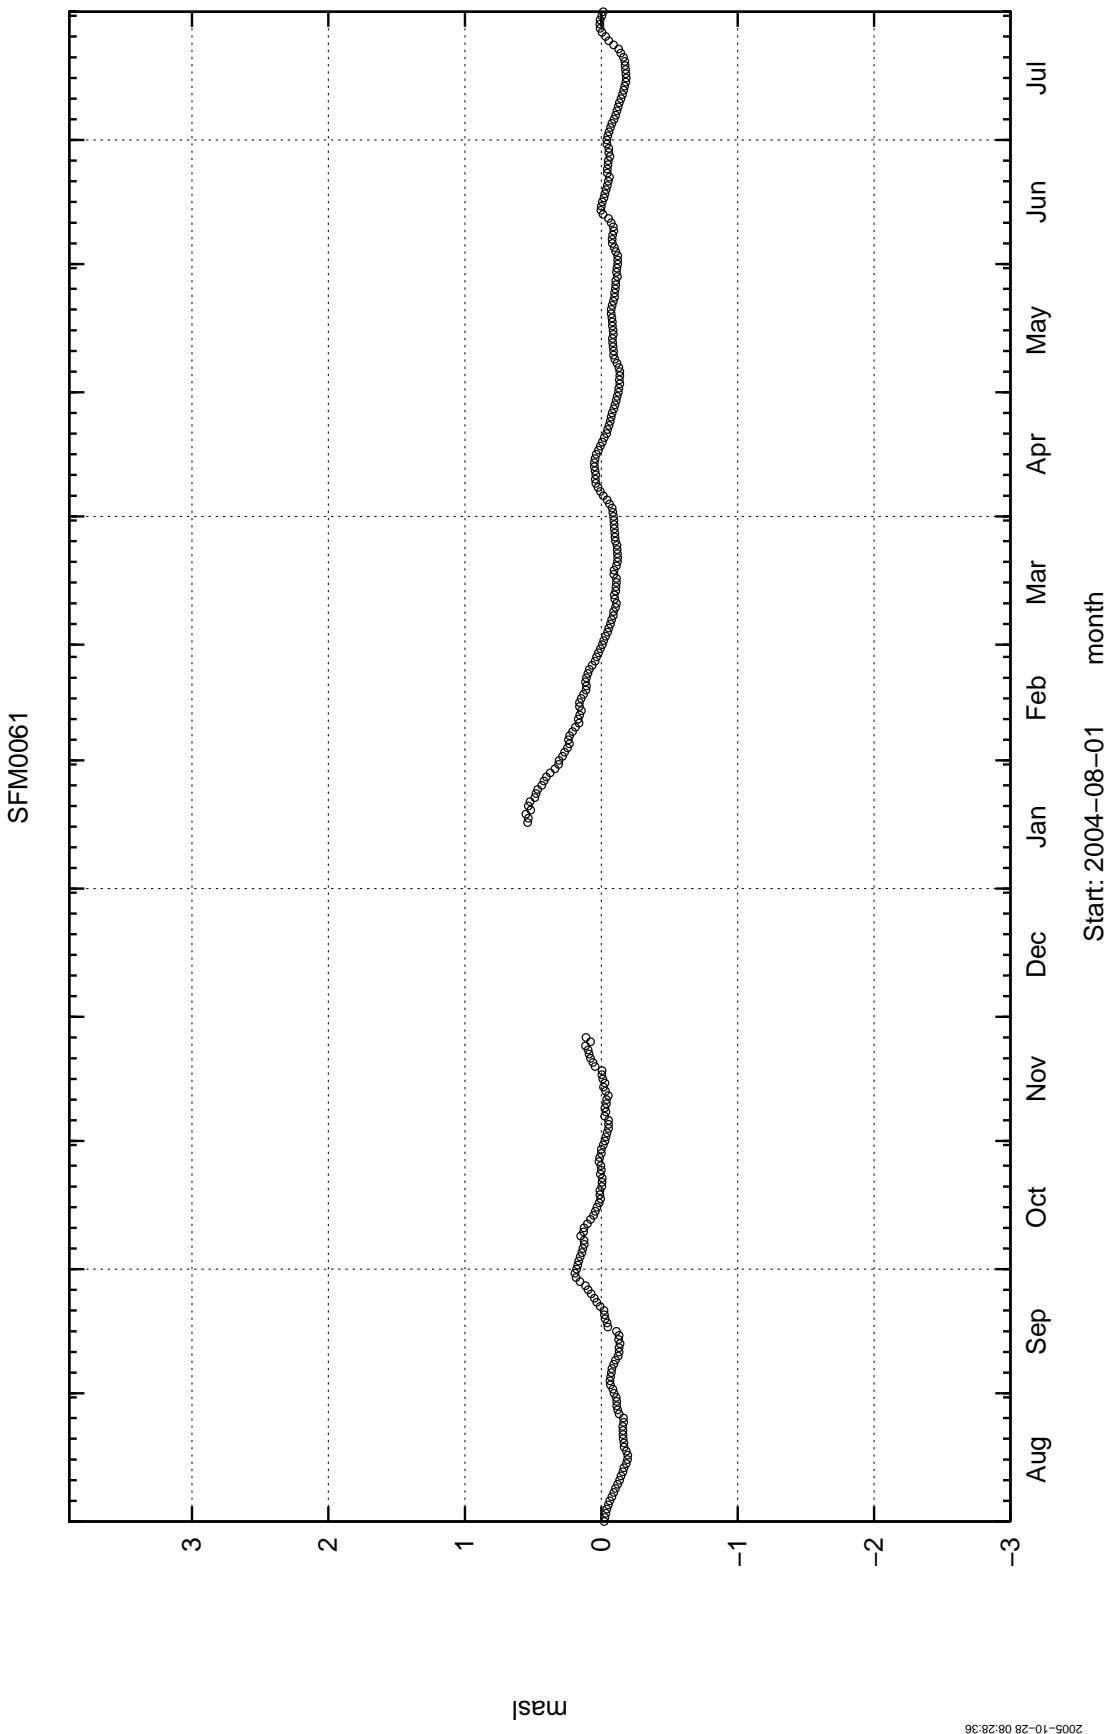

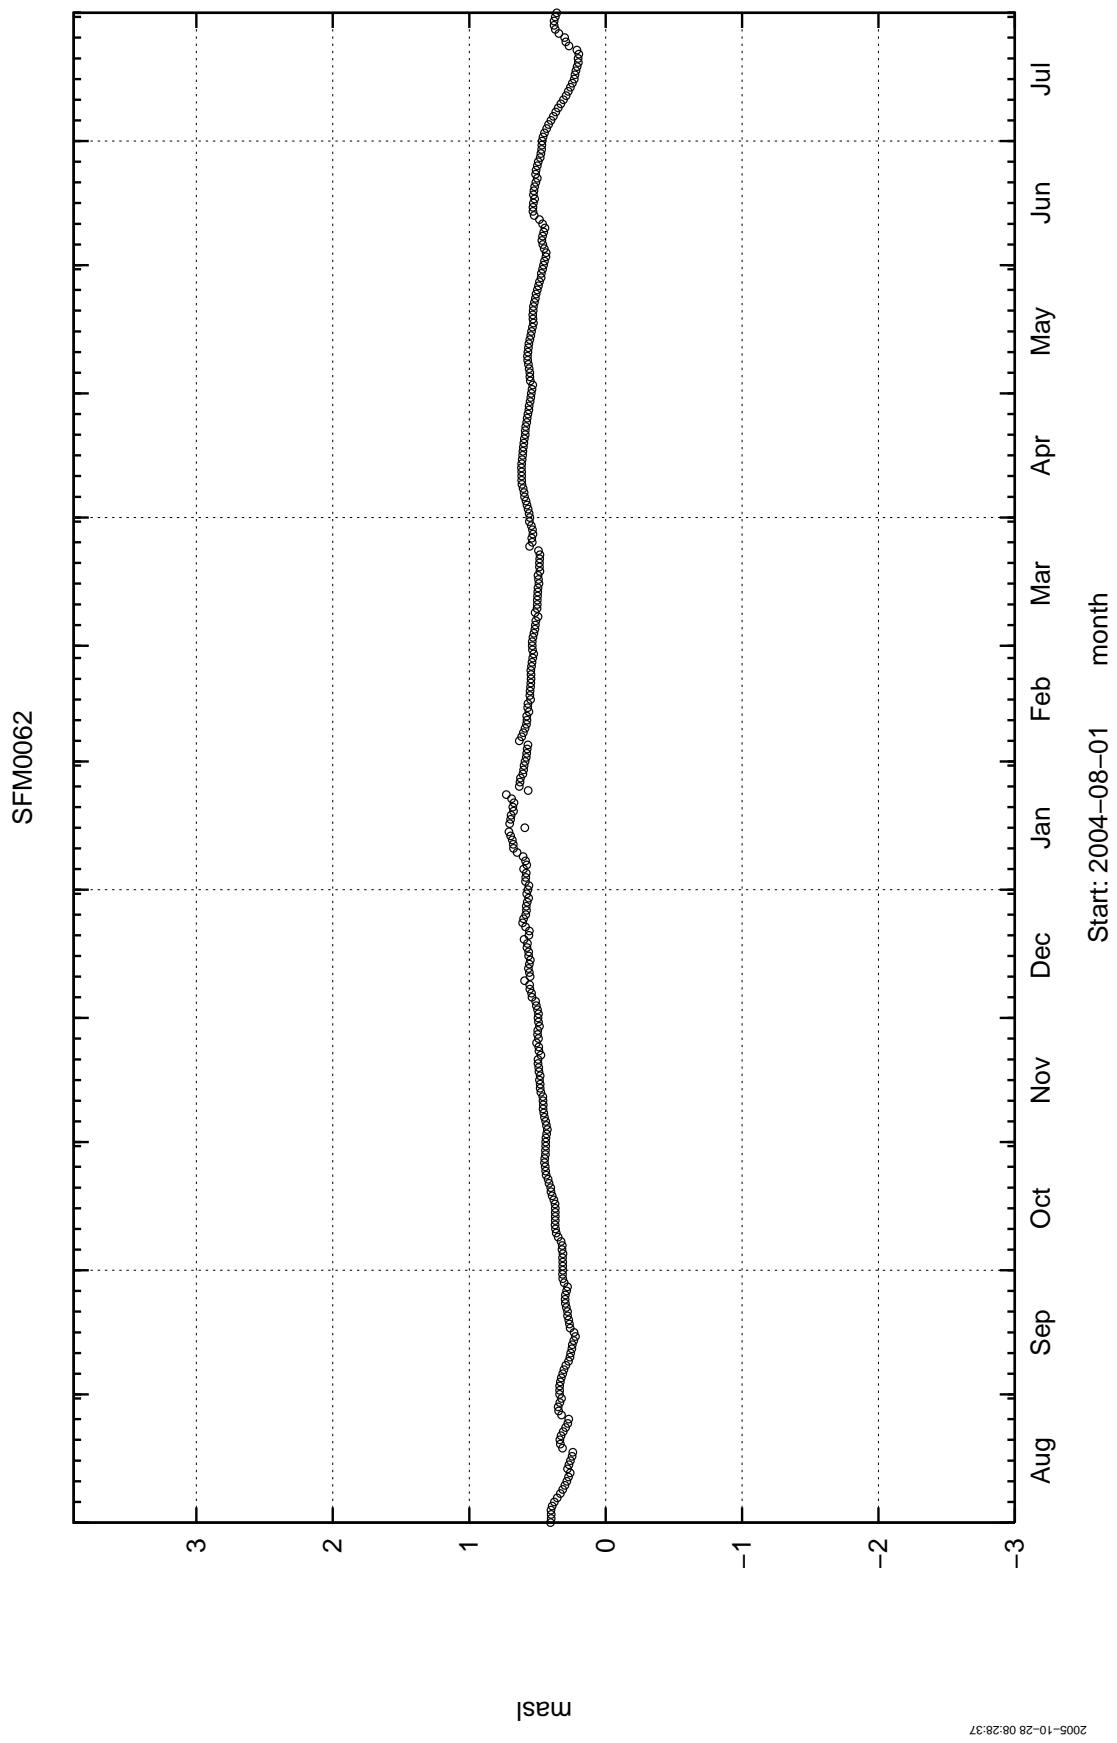

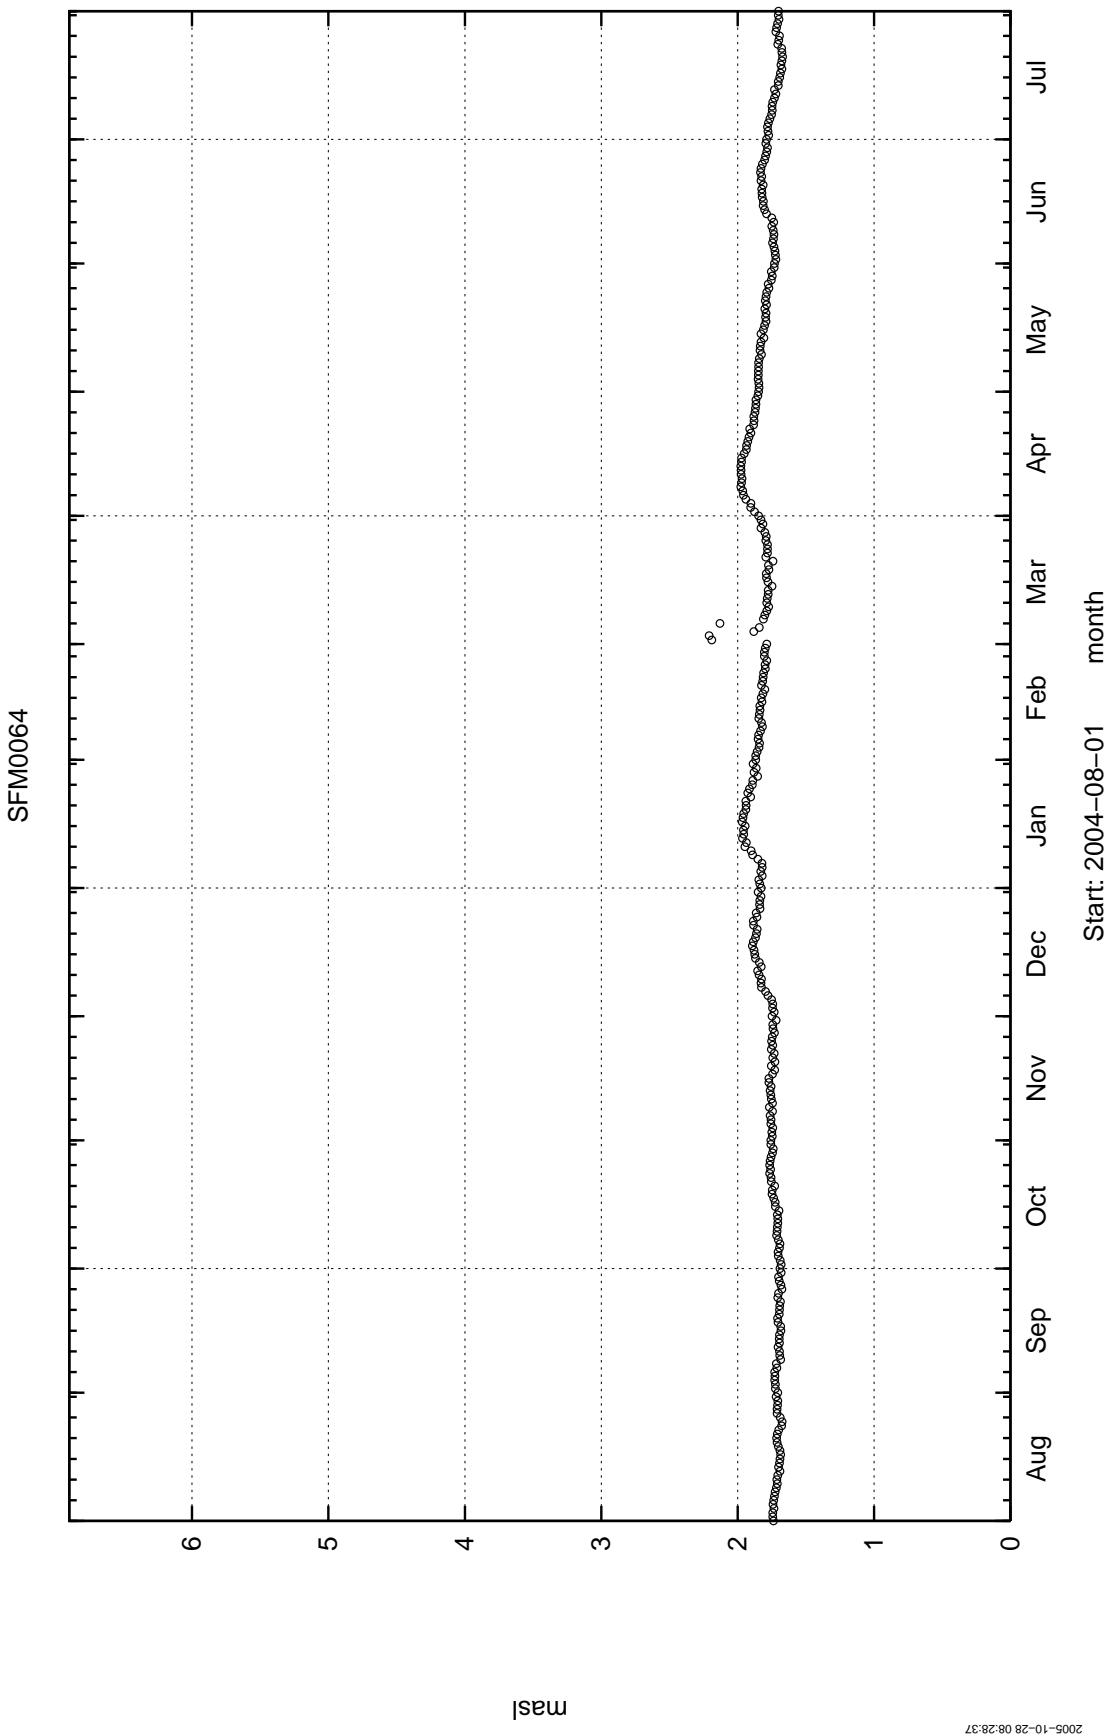

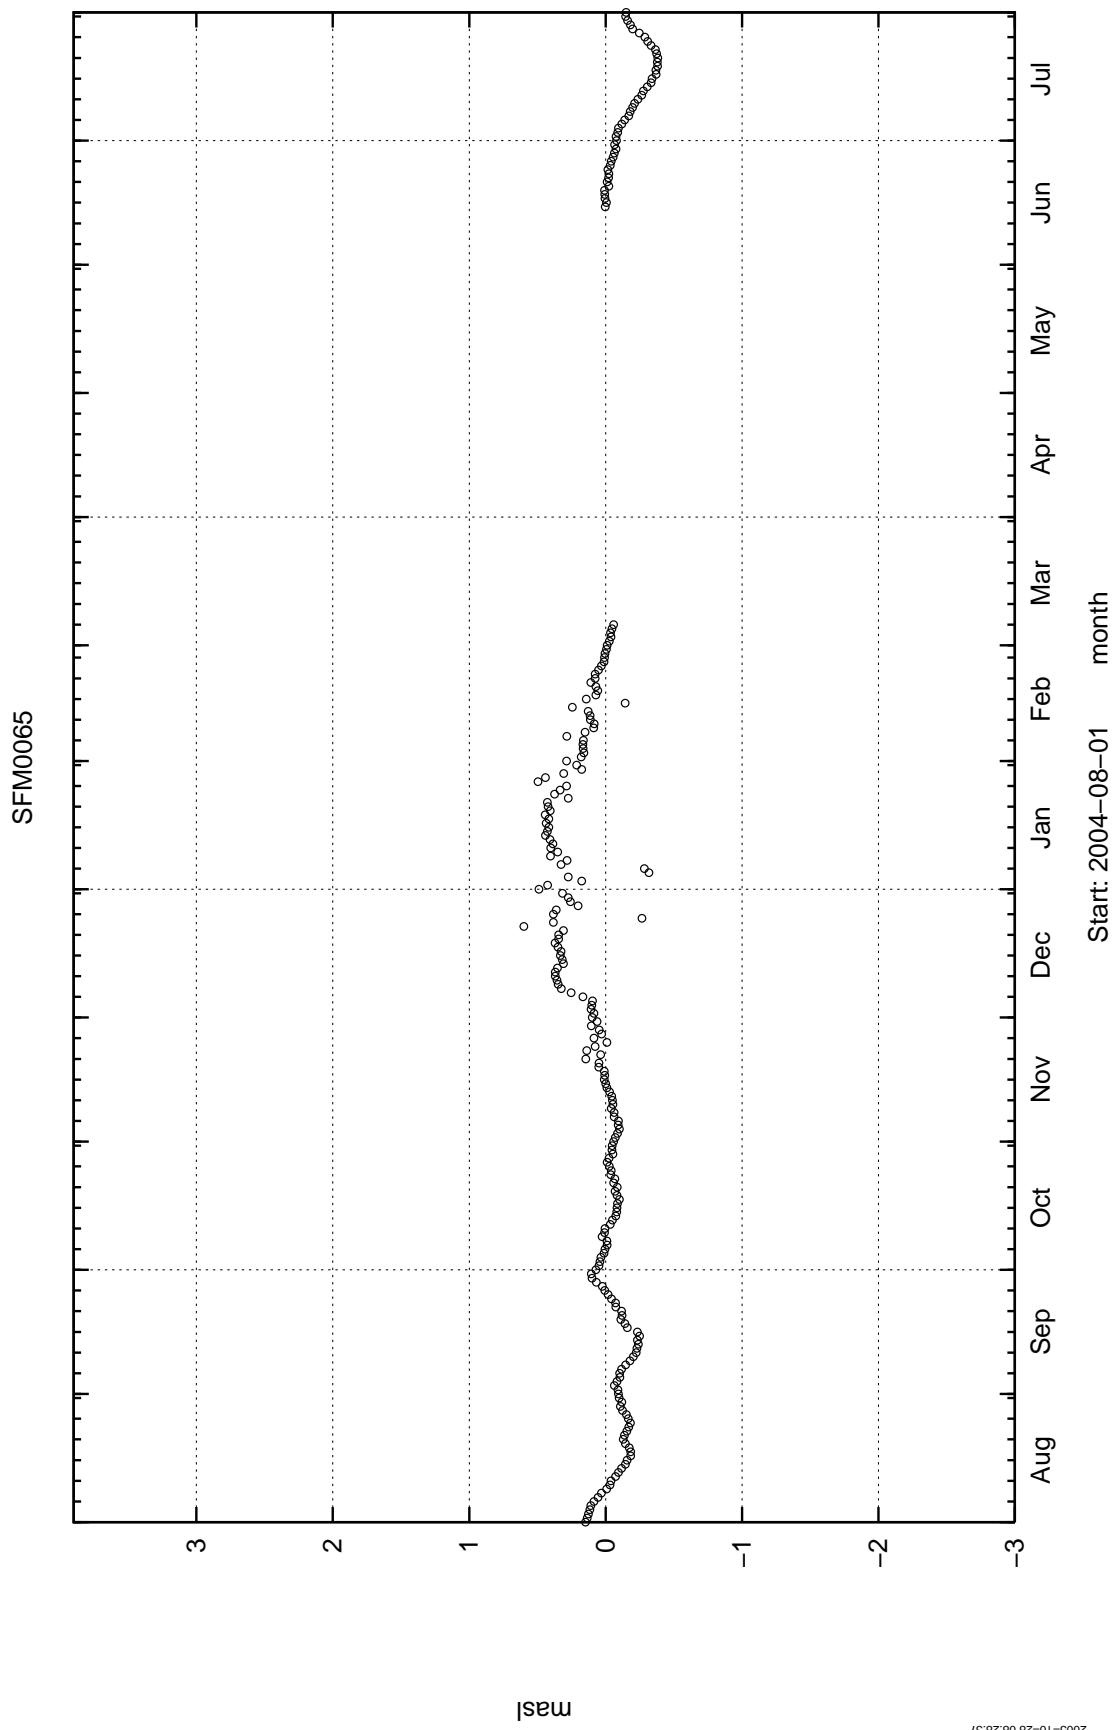

2005-10-28 06:28:37

