

Forsmark site investigation

Meteorological monitoring at Forsmark, October 2006 until June 2007

Lennart Wern, Jörgen Jones
SMHI

December 2007

Svensk Kärnbränslehantering AB
Swedish Nuclear Fuel
and Waste Management Co
Box 250, SE-101 24 Stockholm
Tel +46 8 459 84 00



Forsmark site investigation

Meteorological monitoring at Forsmark, October 2006 until June 2007

Lennart Wern, Jörgen Jones
SMHI

December 2007

Keywords: Meteorological stations, Precipitation, Air temperature, Barometric pressure, Wind speed, Wind direction, Air humidity, Global radiation, Calculated potential evapotranspiration, AP PF 400-07-009.

This report concerns a study which was conducted for SKB. The conclusions and viewpoints presented in the report are those of the authors and do not necessarily coincide with those of the client.

Data in SKB's database can be changed for different reasons. Minor changes in SKB's database will not necessarily result in a revised report. Data revisions may also be presented as supplements, available at [www\(skb.se\)](http://www(skb.se)).

A pdf version of this document can be downloaded from [www\(skb.se\)](http://www(skb.se)).

Abstract

In the Forsmark area, meteorological monitoring has been going on since 2003. Meteorological measurements are performed at two locations, Högmasten and Storskäret. Measured and calculated parameters are precipitation and corrected precipitation, air temperature, barometric pressure, wind speed and direction, air humidity, global radiation and potential evapotranspiration. The Swedish Meteorological and Hydrological Institute, SMHI, has been responsible for planning and design of the two stations used for meteorological monitoring.

In general, the quality of the meteorological measurements during the period concerned, starting 2006-10-01 and ending 2007-06-30, has shown to be good. Only minor interruptions in the measurements according to malfunctioning equipment have occurred.

Sammanfattning

I Forsmarksområdet har meteorologiska mätningar pågått sedan 2003. Dessa sker på två ställen, vid Högmasten och Storskäret. Här har registrerande instrument monterats i master. De meteorologiska parametrar som mäts och beräknas är nederbörd, korrigeras nederbörd, lufttemperatur, luftryck, vindhastighet och -riktning, luftfuktighet, globalstrålning och potentiell evapotranspiration. Sveriges Meteorologiska och Hydrologiska Institut, SMHI, har varit ansvariga för utformandet av de två meteorologiska mätstationerna.

Kvaliteten hos de meteorologiska mätningarna utförda under perioden 2006-10-01 till och med 2007-06-30 har generellt varit god. Endast några kortare avbrott i mätningarna har förekommit orsakade av fel på mätutrustningen.

Contents

1	Introduction	7
2	Objective and scope	11
3	Equipment	13
3.1	Meteorological measuring stations	13
3.1.1	Calibration of equipment used at meteorological measuring stations	13
4	Execution	15
4.1	General	15
4.2	Meteorological measurements	15
4.2.1	Quality check of meteorological data	15
4.2.2	Data handling/post processing	15
4.3	Analyses and interpretations	16
4.3.1	Meteorological measurements	16
4.4	Nonconformities	16
5	Results	17
5.1	Meteorological monitoring	17
5.1.1	Precipitation	17
5.1.2	Air temperature	19
5.1.3	Barometric pressure	19
5.1.4	Wind speed and wind direction	19
5.1.5	Relative humidity	19
5.1.6	Global radiation	20
5.1.7	Calculated potential evapotranspiration	21
References		23
Appendix 1	Meteorological monitoring	25
Appendix 2	Enkel bedömning av nederbördsmätförluster på fyra automatstationer	33
Appendix 3	Servicerapport Högmasten	35
Appendix 4	Servicerapport Storskäret	37

1 Introduction

This document reports the results of meteorological measurements made in the area of Forsmark during the period October 2006 – June 2007. The activities are performed within the site investigation at Forsmark and carried out in accordance to activity plan SKB AP PF 400-07-009, and the method description SKB MD 364.007 (SKB internal controlling documents). The controlling documents used in the activity are listed in Table 1-1.

To characterise the investigation area regarding meteorological conditions, SMHI has placed two stations with meteorological measuring equipment on the sites Högmasten (Forsmark) and Storskäret. The results of the meteorological monitoring will be used for general site characterisation, water balance calculations and as input data for hydro(geo)logical modelling. The geographical locations of the meteorological monitoring stations are shown in Figure 1-1 together with nearby SMHI stations and MESAN-points referred to in the present report. MESAN is an automatic system for mesoscale analysis of meteorological parameters built on manual as well as automatic observations, including satellite and radar information. Figure 1-2 shows a detailed map of the location of the two SKB stations and the coordinates of the two stations are given in Table 1-2.

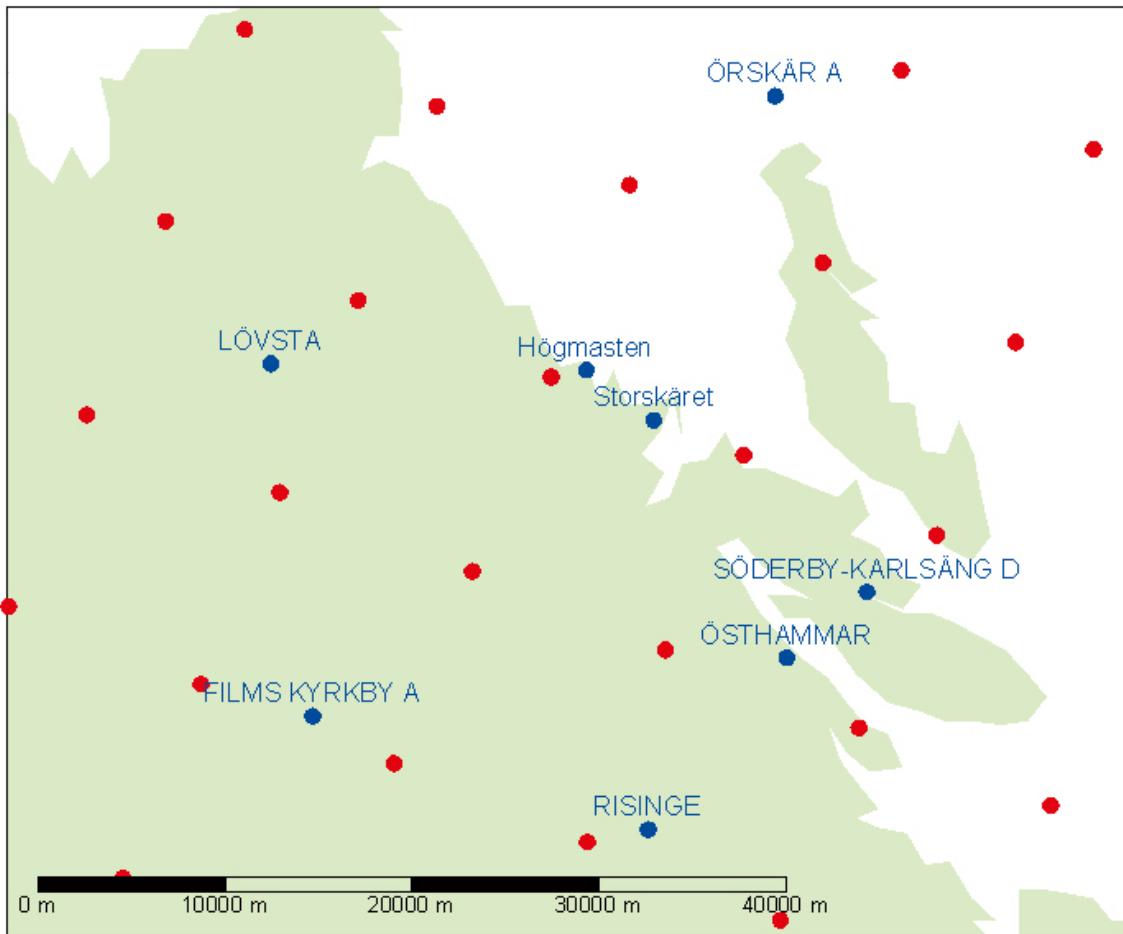


Figure 1-1. Map showing the location of SMHI's monitoring stations (capital letters), SKB's stations (lower-case letters), and the MESAN-points (red points).

Table 1-1. Controlling documents for performance of the activity.

Activity plan	Number	Version
Lokala meteorologiska mätningar, perioden 2006-10-01 – 2007-06-30	SKB AP PF 400-07-009	1.0
Method description	Number	Version
Metodbeskrivning för meteorologiska mätningar	SKB MD 364.007	1.0

Table 1-2. SKB:s monitoring stations. Coordinates in “RT 90 2,5 gon W 0:-15”.

Identity	X	Y	Type	Name
PFM010700	6700525	1631046	Meteorological station	Högmasten (Forsmark)
PFM010701	6697827	1634659	Meteorological station	Storskäret



Figure 1-2. A detailed map showing the location of Högmasten and Storskäret.

Original data from the reported activity are stored in SKB's primary database Sicada, where they are traceable by the Activity Plan number (AP PF 400-07-009). Only data in SKB's databases are accepted for further interpretation and modelling. The data presented in this report are regarded as copies of the original data. Data in the databases may be revised, if needed. Such revisions will not necessarily result in a revision of the P-report, although the normal procedure is that major data revisions entail a revision of the P-report. Minor data revisions are normally presented as supplements, available at www.skb.se.

2 Objective and scope

SKB carries out site investigations at the Forsmark area. SMHI has, commissioned by SKB, installed two stations with meteorological measuring equipment at the site to characterise the meteorological conditions. The results will also be used for water balance calculations and as input data for hydro(geo)logical modelling.

The objective of this report is to present quality checked results from the meteorological monitoring during the period from 1 October 2006 until 30 June 2007.

3 Equipment

3.1 Meteorological measuring stations

Table 3-1 gives technical information about the equipment. Polycarbonate cupboards house data loggers (type Campbell CR10X), modems (Siemens TC35 and COM200E), and are earthed for lightning protection.

The wind is measured at 10 m above ground level and the other parameters at 2 m.

3.1.1 Calibration of equipment used at meteorological measuring stations

FDS Mätteknik calibrated the instruments using data submitted by the manufacturers along with the installation of the instruments.

FDS Mätteknik also made a service and calibration of the instruments at Högmasten and at Storskäret 28 May 2005, see Appendix 3 and 4. The service report showed that the instruments were in good condition at both stations.

Table 3-1. Measuring equipment for collecting meteorological data at the stations.

Parameters	Equipment
Precipitation	Geonor T200 complete with pedestal and wind shield
Air temperature	Pt100 sensor with radiation shield and ventilated Young 41004
Barometric pressure (only at Högmasten)	PTB200
Wind speed and direction	RM Young Wind monitor
Air humidity	Rotronic HygroClip MP 100H
Global radiation (only at Högmasten)	Kipp & Zonen CM21 with warming and fan

4 Execution

4.1 General

This execution chapter is intended to describe the complete course of events, from measuring at Högmasten and Storskäret, via quality check and data handling to the storage in SKB's database Sicada.

Two abbreviations are frequently used in this context; HMS and Sicada. HMS (Hydro Monitoring System) is SKB's network for the monitoring of meteorological, hydrological and hydrogeological parameters. This is a system for collection, calculation, data check up and presentation. Sicada is the database that contains all of SKB's quality assured data. Data in Sicada are traceable by the activity plan number. It is from data in Sicada that the modelling and analyses are performed.

4.2 Meteorological measurements

Data are collected every half-hour. The different parameters are valid for the following time periods:

- Precipitation: Accumulated sum of precipitation every 30 min. The 30-min precipitation value is the difference between two adjacent accumulated precipitation sums.
- Air temperature: 30-minutes mean of one-second values.
- Barometric pressure: 30-minutes mean of one-second values.
- Wind speed and wind direction: The latest 10-minutes mean value for the actual 30 minutes. Hence, for the 10:00 data the measurement is from 09:51 to 10:00.
- Relative humidity: 30-minutes mean of one-second values.
- Global radiation: 30-minutes mean of one-second values.

4.2.1 Quality check of meteorological data

Before any data finally will be stored in Sicada they are checked and approved by SMHI. Every week a primary check for missing and incorrect values is performed by SMHI and every third month a check is made by a meteorologist at SMHI who approves data, calculates potential evapotranspiration and estimates the true (corrected) precipitation before delivery for final storage in Sicada.

4.2.2 Data handling/post processing

Data, that were not checked, were transferred from SMHI to SKB daily via FTP (File Transfer Protocol), while quality checked data were transferred every third month.

The data loggers at the stations have internal memories to secure the data in case of communication disturbances. The system is called upon every three hours through SMHI's air quality system AIRVIRO, where data are stored and the quality assurance and check is done. After this check has been performed, data are delivered to SKB.

SMHI has, commissioned by SKB, constructed a homepage where the results of the measurements can be shown as graphs and from which data can be extracted. The address is <http://www.airviro.smhi.se/forsmark/>.

4.3 Analyses and interpretations

4.3.1 Meteorological measurements

SMHI has continuously checked the collected data, i.e. checked that data are within the limits of reason for each parameter. Data have also been compared with data from SMHI's analysing system MESAN. The values are interpolated from the nearest grid points in MESAN. The resolution of MESAN is 11×11 km and an analysis is made every hour. Corrected data have been stored in a special database. In Table 4-1, the coordinates of the nearest grid point are presented and in Figure 1-1 they are shown on a map.

4.4 Nonconformities

There are no nonconformities that affect the results or nonconformities with respect to the activity plan or the method description. However, some system malfunctions occurred and some data were lost.

The relative humidity temporary dropped to -2.4% and 0.4% at Högmasten 2006-11-09 13:30–14:00. The values before and after these incorrect values are correct.

The relative humidity at Storskäret suddenly dropped 2007-03-16 at 19:00 from 46% to 29% and then went up to 56%. There was no drop at Högmasten. This drop at Storskäret is considered wrong. Data are also missing from Storskäret at 22:00 the same day.

At two occasions at Storskäret, 2007-01-21 at 01:30 and 2007-03-16 at 19:30, very high false rainfall was registered, 306 mm and 439.6 mm, in 30 min. From the accumulated rainfall data it was obvious that these values were wrong. This occurred because of missing data for these hours. In Appendix 1, Figure A1-7, you can see the drop at 2007-01-21.

A few 30-min precipitation values are missing due to emptying the buckets 2007-06-28.

Table 4-1. Mesan grid points.

Latitude	Longitude
60.40	18.15
60.36	18.34
60.45	18.42
60.49	18.24

5 Results

5.1 Meteorological monitoring

The meteorological measurements have turned out to work very well during the period for all parameters. However, the 30-minutes value of precipitation still showed too high levels. This occurs because of the high sensitivity of the instrument and that the precipitation is measured so often. The software in the data logger was improving the quality of the data afterwards at the station.

The locations of all monitoring stations from which results are presented below are shown in Figures 1-1 and 1-2. In Appendix 1 daily values are shown for all parameters except for precipitation and wind direction. As an example of the high-resolution variations during a month, data from January 2007 are presented for all parameters, including precipitation and wind direction.

5.1.1 Precipitation

The monthly precipitation at the SMHI stations is presented in Table 5-1 and Figure 5-1 below. "Films Kyrkby A" and "Örskär A" are automatic stations whereas the others are manual stations. The precipitation differed substantially between stations and between months. The presented precipitation values were all checked and approved by SMHI. However, the values were not corrected for wind, wetting and evaporation losses. The correction factors are listed in Table 5-2.

Table 5-1. Monthly measured precipitation in mm at SMHI's stations. These values are not corrected for wind, wetting and evaporation losses. Note that Nov 2006 is missing for Östhammar.

	2006-10	2006-11	2006-12	2007-01	2007-02	2007-03	2007-04	2007-05	2007-06
Films Kyrkby D	121	57	24	82	29	24	16	36	37
Films Kyrkby A	116	57	26	72	26	23	15	34	39
Lövsta	128	46	20	64	29	21	8	48	39
Risinge	114	47	22	71	27	17	21	44	60
Östhammar	127		20	59	26	14	12	43	40
Söderby-Karlsäng D	123	43	16	58	30	15	9	48	40
Örskär A	113	41	12	40	21	13	6	46	23

Table 5-2. Corrections in percent of SMHI's stations according to /Alexandersson 2003/.

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Year
Örskär A	19	22	23	15	15	13	13	15	14	15	17	20	16
Östhammar	9	13	10	9	9	12	8	9	8	7	8	10	9
Lövsta	10	9	12	10	11	12	8	8	8	8	9	9	9
Risinge	11	12	10	11	13	12	8	8	8	9	8	9	9
Film Kyrkby A	13	16	19	15	13	14	11	13	13	13	14	16	14
Söderby-Karlsäng D	10	11	10	10	12	12	9	9	8	8	8	9	10

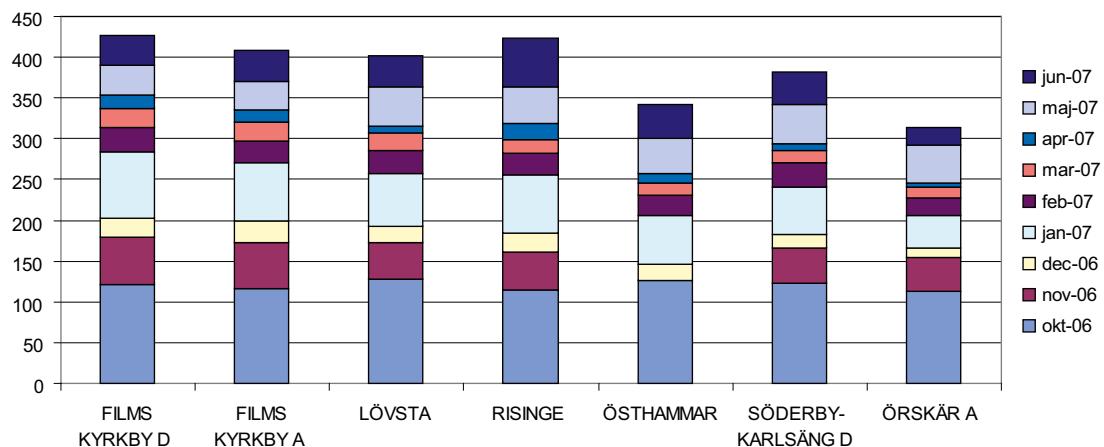


Figure 5-1. Monthly precipitation in mm at SMHI's stations. The values are not corrected for wind, wetting and evaporation losses. Note that Nov. 2006 is missing for Östhammar.

The precipitation at Högmasten and Storskäret is presented in Table 5-3. “001” in the table means originally measured value, “COR” means corrected and approved value by SMHI and “ALX” is an estimation of the true precipitation.

The method for estimating the true precipitation (ALX) is the same method as used for the SMHI stations. Table 5-4 gives the corrections (percentage) for each month. More information about the estimation of true precipitation can be found in /Alexandersson 2005/ (Appendix 2).

The registered 30-minutes precipitation values have to be filtered before storage. That is because the instrument is very sensitive and registers incorrectly small values of precipitation.

If the accumulated uncorrected precipitation from 1 October 2006 to 30 June 2007 from the different stations is compared, it can be seen that the SMHI-station at Örskär only got 314 mm, whereas the other SMHI stations got between 341 and 427 mm (Table 5-5). These values can be compared with the COR-values from Forsmark and Storskäret in the same table. The values correspond well with each other.

Table 5-3. Monthly precipitation in mm at SKB's stations. “001” in the table means originally measured value, “COR” means corrected and approved value by SMHI, and “ALX” is the estimation of the true precipitation.

	2006-10	2006-11	2006-12	2007-01	2007-02	2007-03	2007-04	2007-05	2007-06
Forsmark 001	115	53	16	55	24	19	7	51	44
Forsmark COR	115	53	16	55	24	19	7	51	34
Forsmark ALX	126	59	18	62	28	21	8	56	37
Storskäret 001	162	51	20	362	27	457	6	43	128
Storskäret COR	130	51	20	56	27	17	6	43	33
Storskäret ALX	143	57	22	63	31	20	7	48	36

Table 5-4. Corrections in percent of SKB's stations according to /Alexandersson 2005/ (Appendix 2).

	J	F	M	A	M	J	J	A	S	O	N	D	Year
Högmasten	13	14	13	11	10	10	10	10	10	10	11	12	11
Storskäret	13	14	13	11	10	10	10	10	10	10	11	12	11

Table 5-5. Precipitation in mm from 1 October 2006 to 30 June 2007. The uncorrected values given for the SMHI stations correspond to the COR-values at SKB's stations. Note that November 2006 is missing for Östhammar.

Forsmark COR	375
Forsmark ALX	416
Storskäret COR	383
Storskäret ALX	425
Örskär	314
Örskär ALX	366
Östhammar	341
Östhammar ALX	372
Lövsta	402
Lövsta ALX	440
Risinge	423
Risinge ALX	467
Films Kyrkby A	409
Films Kyrkby A ALX	466
Films Kyrkby D	427
Films Kyrkby D ALX	469
Söderby Karlsäng D	383
Söderby Karlsäng D ALX	419

As an example of high-resolution precipitation data, Figure A1-7 in Appendix 1 shows the 30-min precipitation values for January 2007 for Forsmark and Storskäret.

5.1.2 Air temperature

A graph of daily temperature is presented in Figure A1-1 in Appendix 1. Values from Forsmark (Högmaстen) and Storskäret are exposed. Figure A1-8 shows the 30-min values for January 2007. The two curves follow each other very well.

5.1.3 Barometric pressure

A graph of the daily barometric pressure is presented in Figure A1-2 in Appendix 1. Values from Forsmark (Högmaстen) and MESAN-values are presented. Figure A1-9 shows the 30-min values for January 2007. The two curves are nearly identical.

5.1.4 Wind speed and wind direction

A graph of the wind speed (daily mean) is illustrated in Figure A1-3 in Appendix 1. Values from Forsmark (Högmaстen) and Storskäret are presented. Figure A1-10 shows the 30-min values for January 2007. The wind speeds are higher from MESAN compared to Högmaстen and Storskäret.

In Figure A1-11 in Appendix 1, the wind directions for the same stations are compared for January 2007. The data correspond well to each other.

5.1.5 Relative humidity

A graph of relative humidity is presented in Figure A1-4 in Appendix 1. Values from Forsmark (Högmaстen) and Storskäret are displayed. Figure A1-12 shows the 30-min values for January 2007. The two curves follow each other very well.

5.1.6 Global radiation

A graph of the daily sum of global radiation is presented in Figure A1-5 in Appendix 1. Figure A1-13 in Appendix 1 shows the 30-min values for January 2007. Global radiation is measured only at Forsmark (Högmastr). Values from Forsmark (Högmastr) and Strång-values are presented. Strång is the analysed global radiation from the SMHI radiation model, which uses data from MESAN. Values from Strång (MESAN) correspond well to measured global radiation at Forsmark (Högmastr).

During days with a clear sky, for example 5 June – 7 June, 2007, it can be seen that something blocks the view of the sensor (Figure 5-2). Every day at about 08:00 there is a notch in the graph. The high mast of the nuclear plant shadows the global radiation instrument.

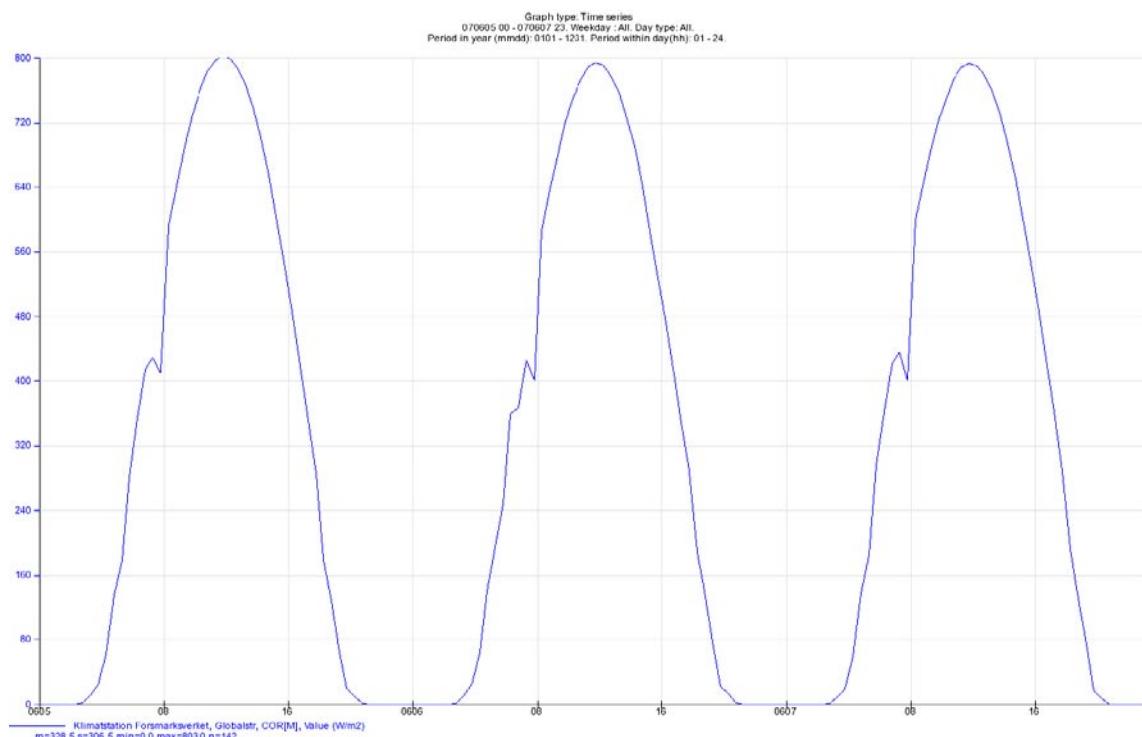


Figure 5-2. Global radiation 5 June – 7 June 2007.

5.1.7 Calculated potential evapotranspiration

The potential evapotranspiration E_p is calculated from the Penman equation:

$$E_p = \left(\frac{\Delta \cdot (R_n - G)}{(\Delta + \gamma) \cdot L} + \frac{\gamma \cdot f(u) \cdot (e_s - e)}{(\Delta + \gamma)} \right) \cdot tstep$$

where

Δ	proportionality constant
R_n	net radiation flux density
G	heat flux density into ground
γ	psychrometric constant
$f(u)$	function of wind speed
e_s	saturated water vapor pressure
e	water vapor pressure
L	latent heat of vaporisation
tstep	time step

The method is described in detail in /Eriksson 1981/. Measured data every 30-minutes of temperature, relative humidity, wind speed and global radiation were required as input data to the equation to calculate the potential evapotranspiration. The wind speed was measured at 10 m above the ground but for the estimation of potential evapotranspiration the wind speed was re-calculated to a value representing 2 m above the ground by multiplying by a factor 0.8. The net radiation was calculated from the measured global radiation and the albedo was set to 0.12 when the ground was not covered with snow and to 0.5 when there was a snow cover. The applied method included heat storage in the ground.

The potential evapotranspiration is much higher at Örskär compared to Forsmark and Films Kyrkby. During the period October 2006 – June 2007 the calculated potential evapotranspiration at Högmasten was 290 mm and at Films Kyrkby 289 mm, while at Örskär it was 324 mm with June 2007 missing. The reason for this difference is mainly that the wind speed is much higher at Örskär (sea station). During June 127 mm was calculated to evaporate at Films Kyrkby, 111 mm at Forsmark and 113 at Storskäret.

A graph of the potential evapotranspiration for Forsmark (Högmasten) is presented in Figure A1-6 in Appendix 1. Figure A1-14 shows the 30-min values for January 2007.

References

- Alexandersson H, 2003.** Korrektion av nederbörd enligt enkel klimatologisk metodik. SMHI, Meteorologi, Nr 111. (In Swedish.)
- Alexandersson H, 2005.** Enkel bedömning av nederbördsförluster på fyra automatstationer (*see Appendix 2*). (In Swedish.)
- Eriksson B, 1981.** Den ”potentiella” evapotranspirationen i Sverige. SMHI, RMK 28. (In Swedish.)
- Førland E J, Allerup P, Dahlström B, Elomaa E, Jónsson T, Madsen H, Perälä J, Rissanen P, Vedin H and Vejen F, 1996.** Manual for operational correction of Nordic precipitation data. DNMI Klima 24/96.

Meteorological monitoring

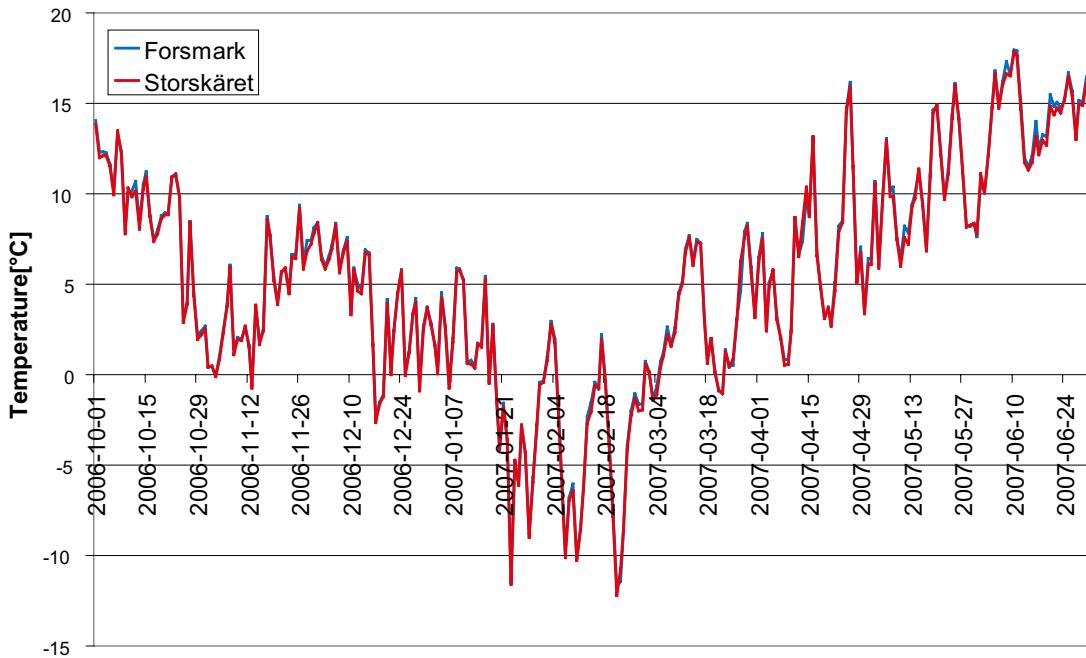


Figure A1-1. Temperature in °C, daily values, October 2006 – June 2007.

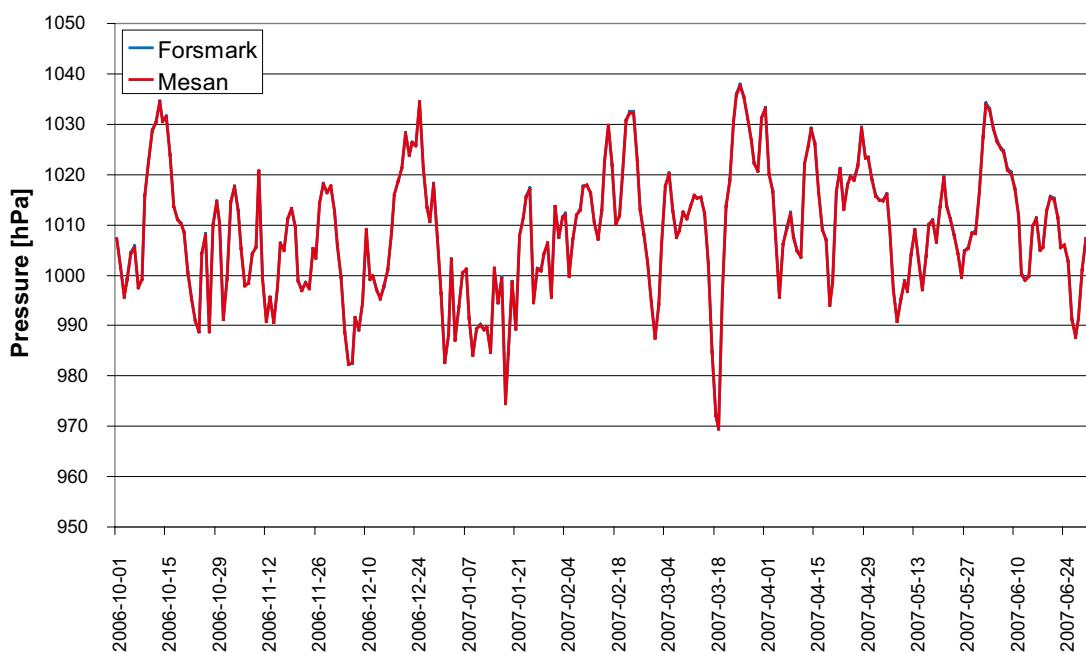


Figure A1-2. Barometric pressure in hPa, daily values, October 2006 – June 2007.

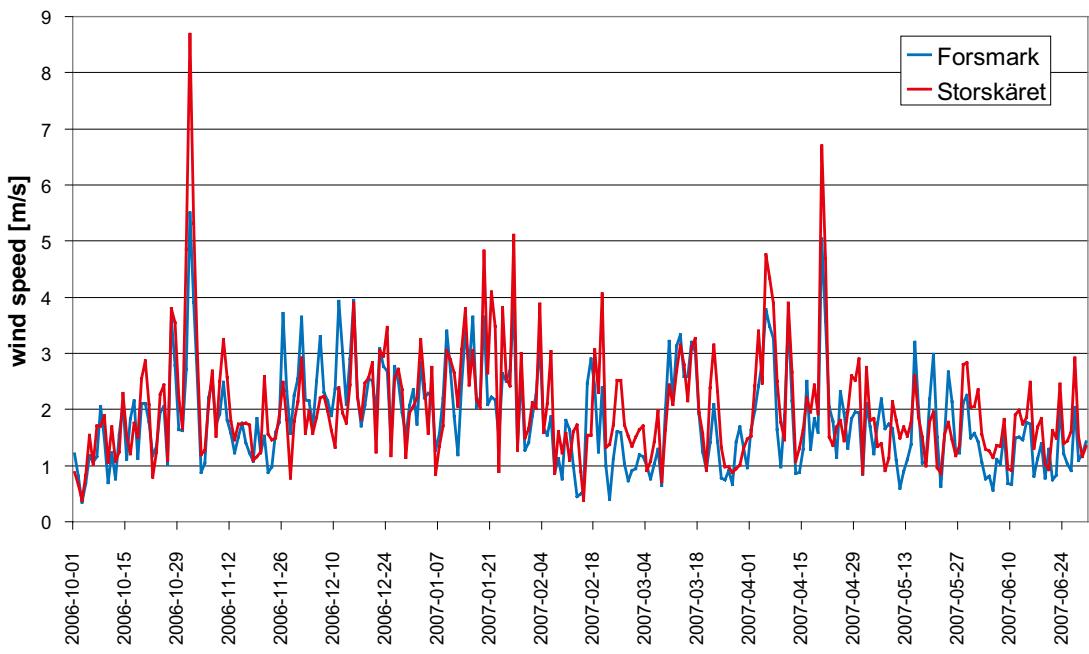


Figure A1-3. Wind speed in m/s, daily values, October 2006 – June 2007.

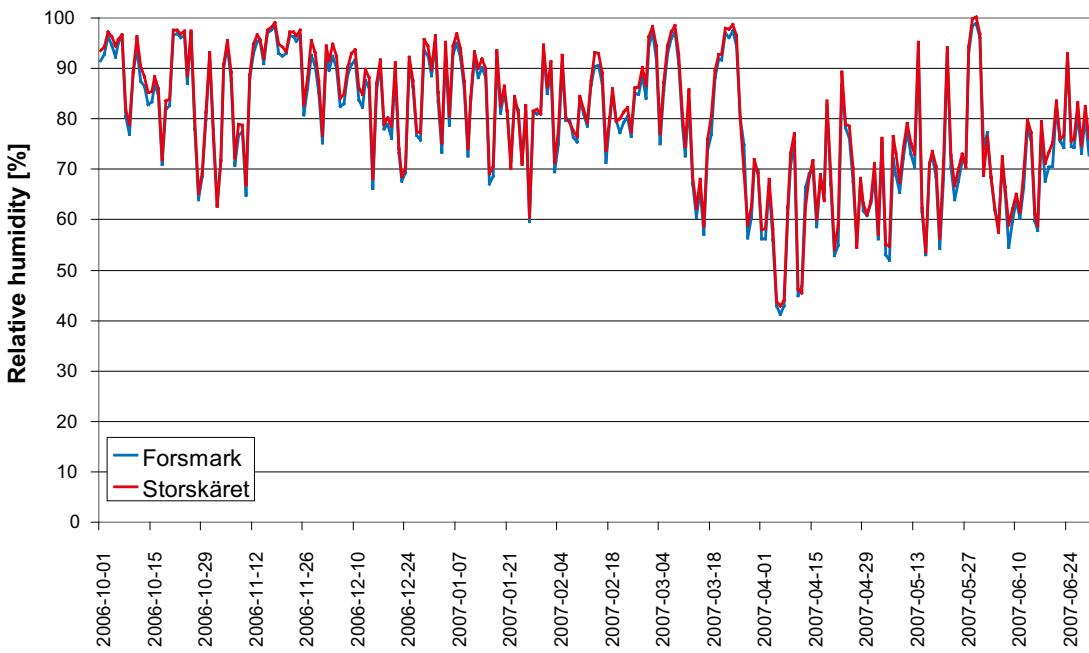


Figure A1-4. Relative humidity in %, daily values, October 2006 – June 2007.

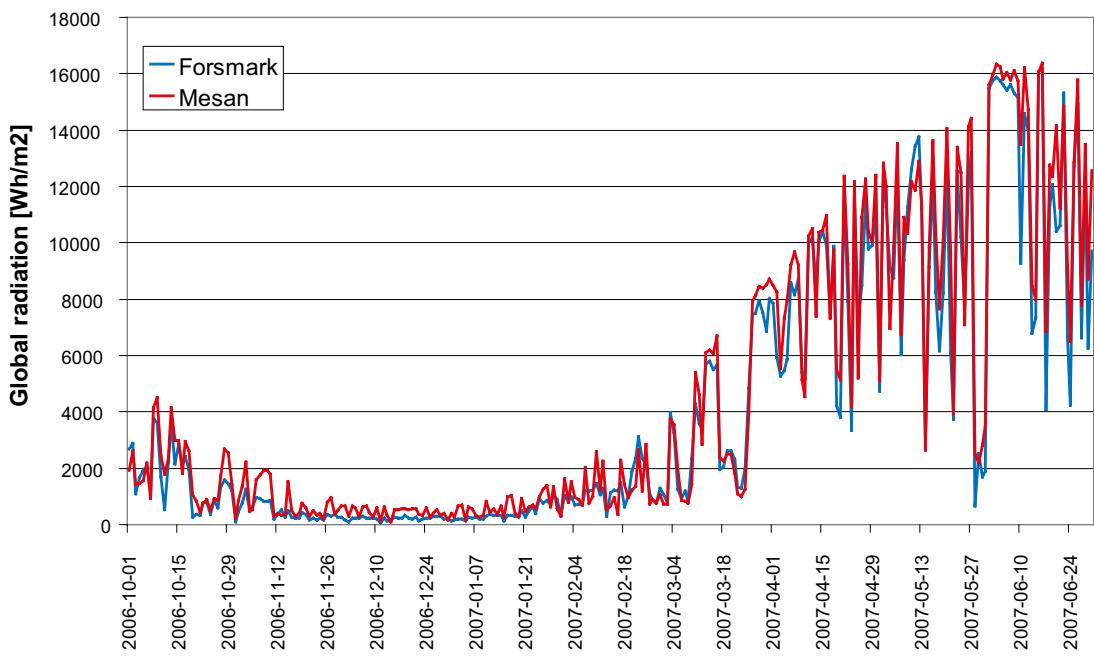


Figure A1-5. Global radiation in Wh/m², daily sum, October 2006 – June 2007.

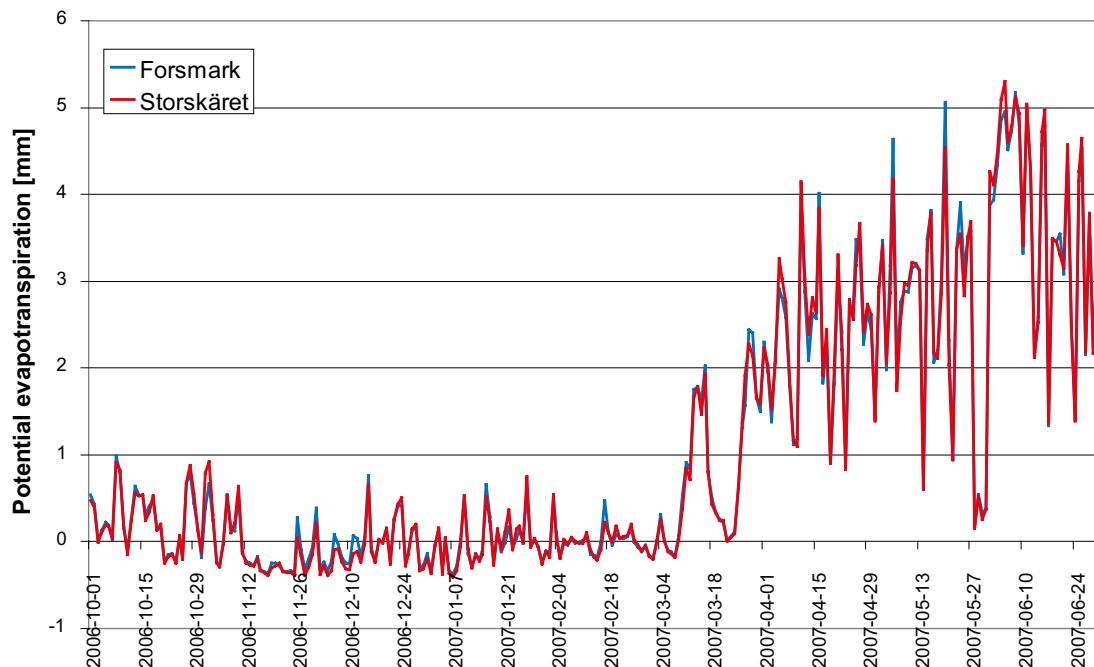


Figure A1-6. Potential evapotranspiration in mm, daily sum, October 2006 – June 2007.

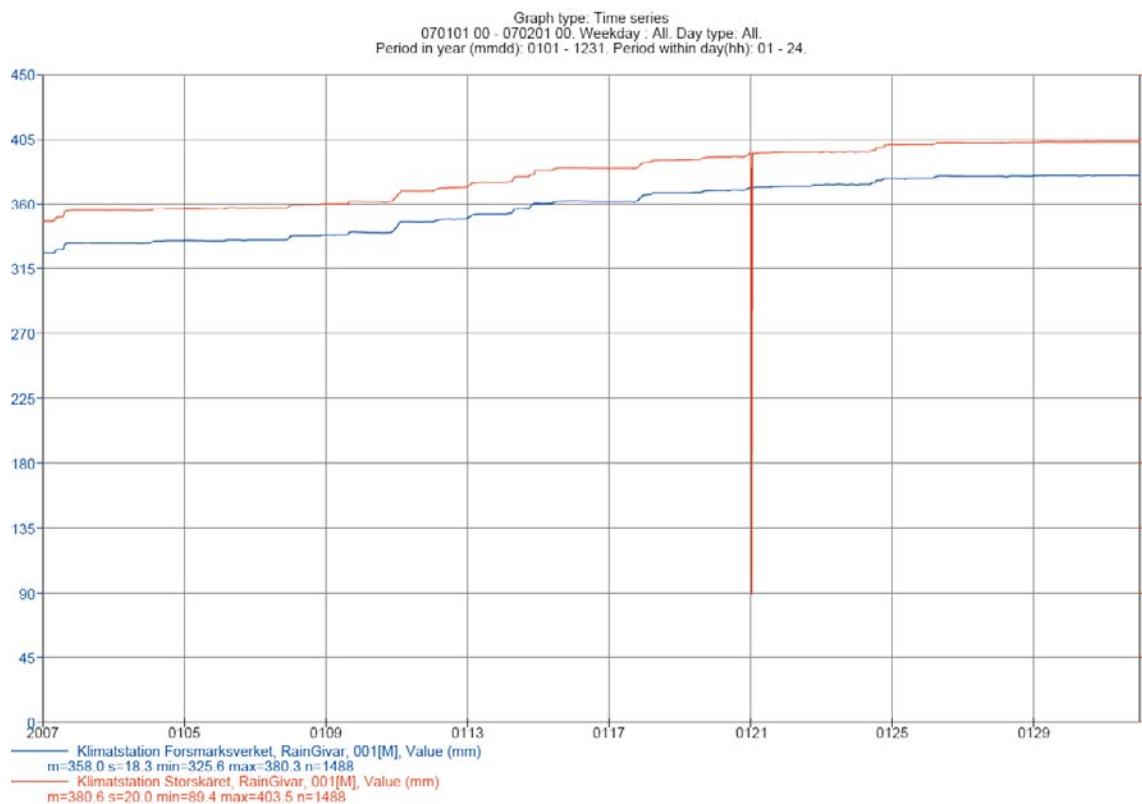


Figure A1-7. Precipitation in mm, 30-min values, January 2007.

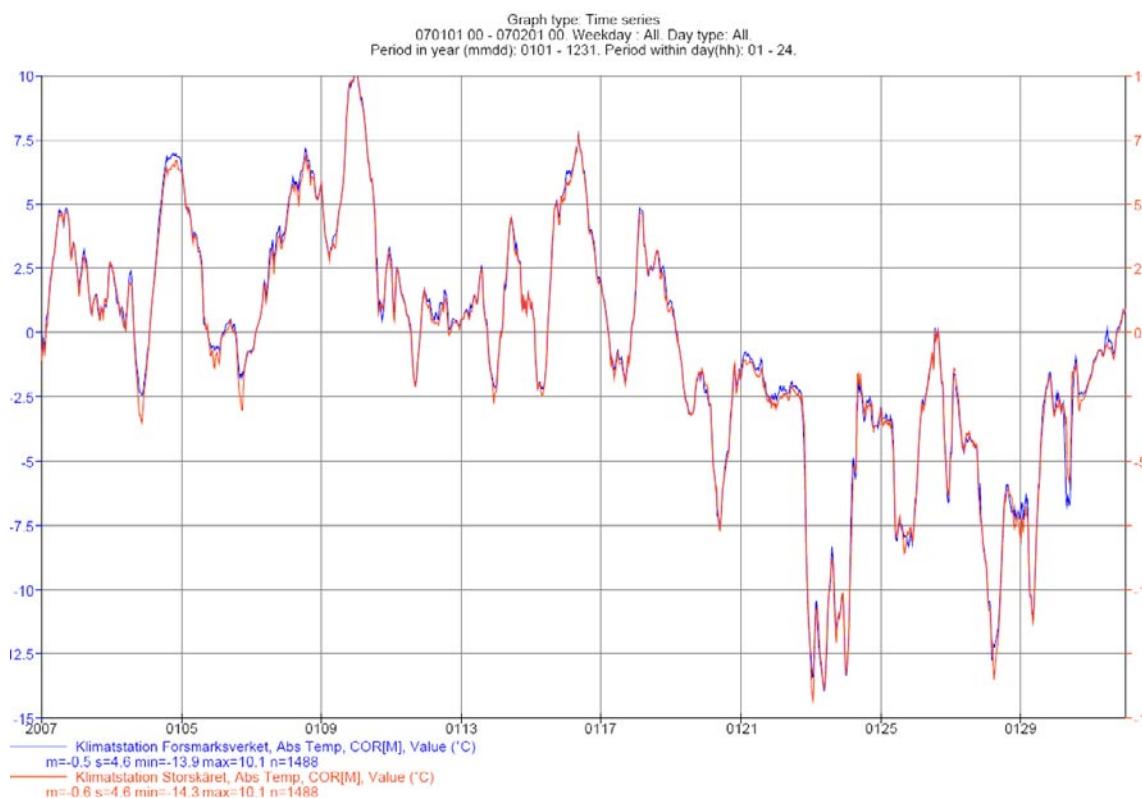


Figure A1-8. Temperature in °C, 30-min-values, January 2007.

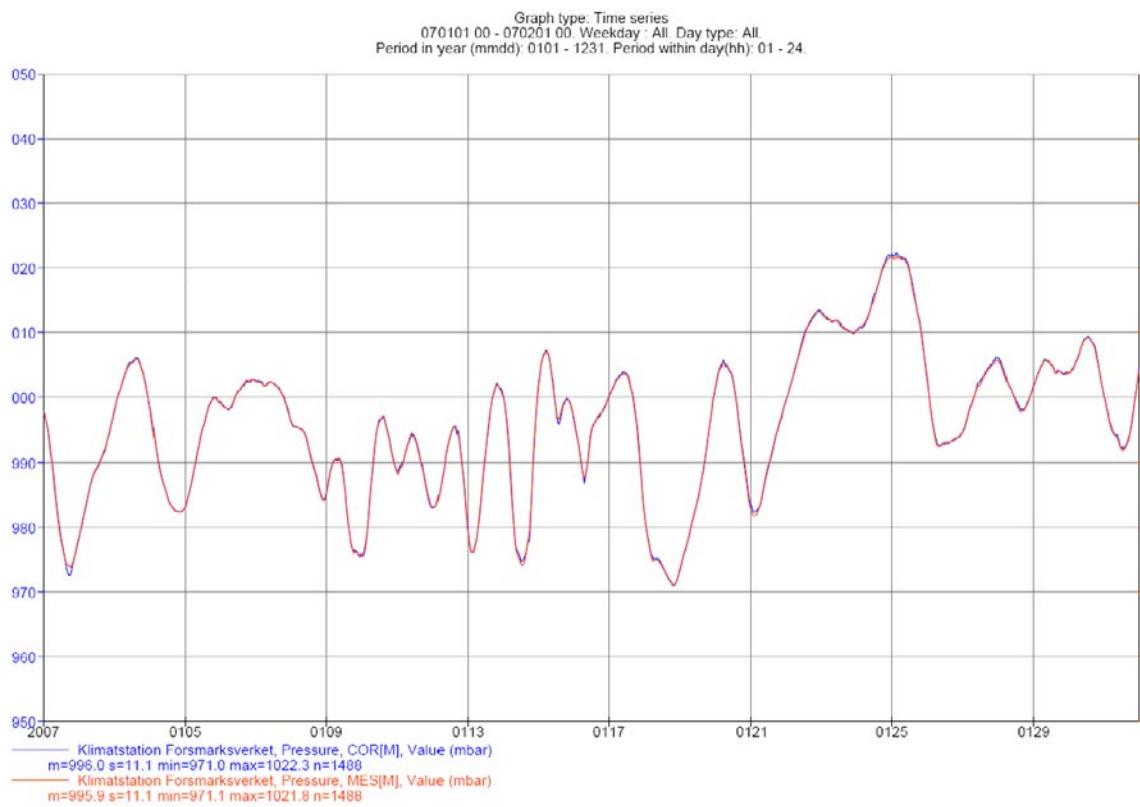


Figure A1-9. Barometric pressure in hPa, 30 min-values, January 2007.

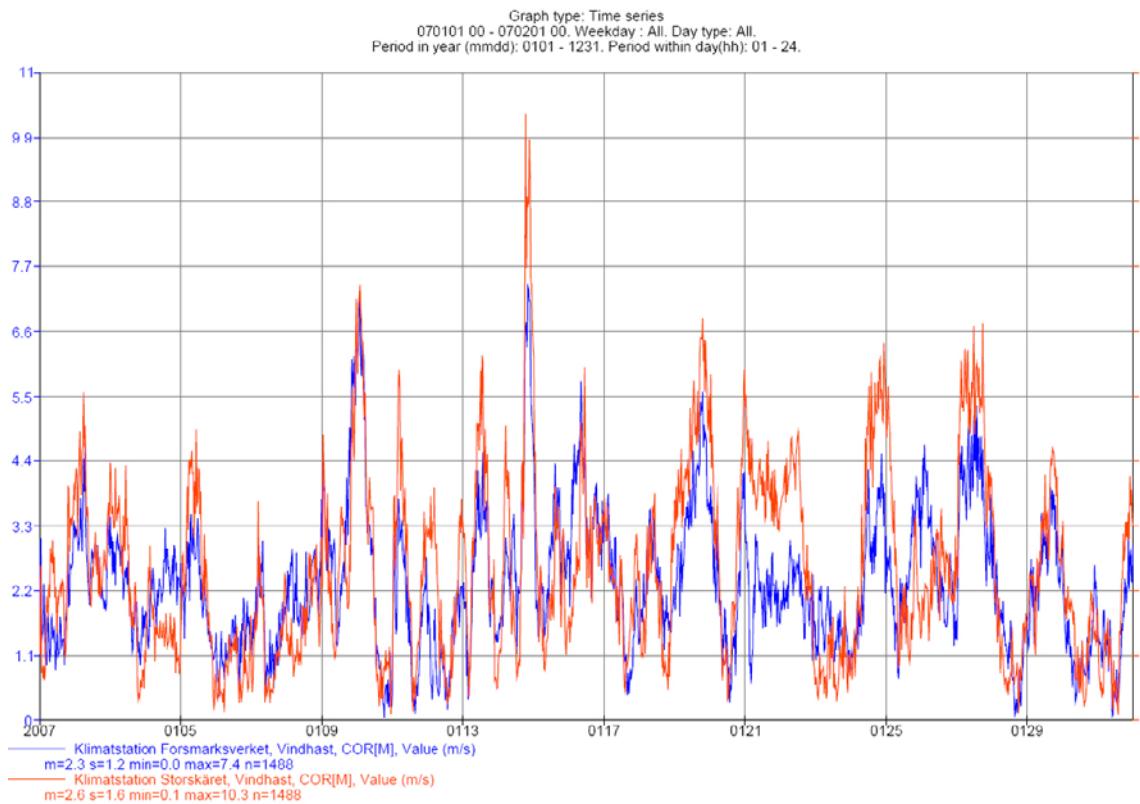


Figure A1-10. Wind speed in m/s, 30-min values, January 2007.

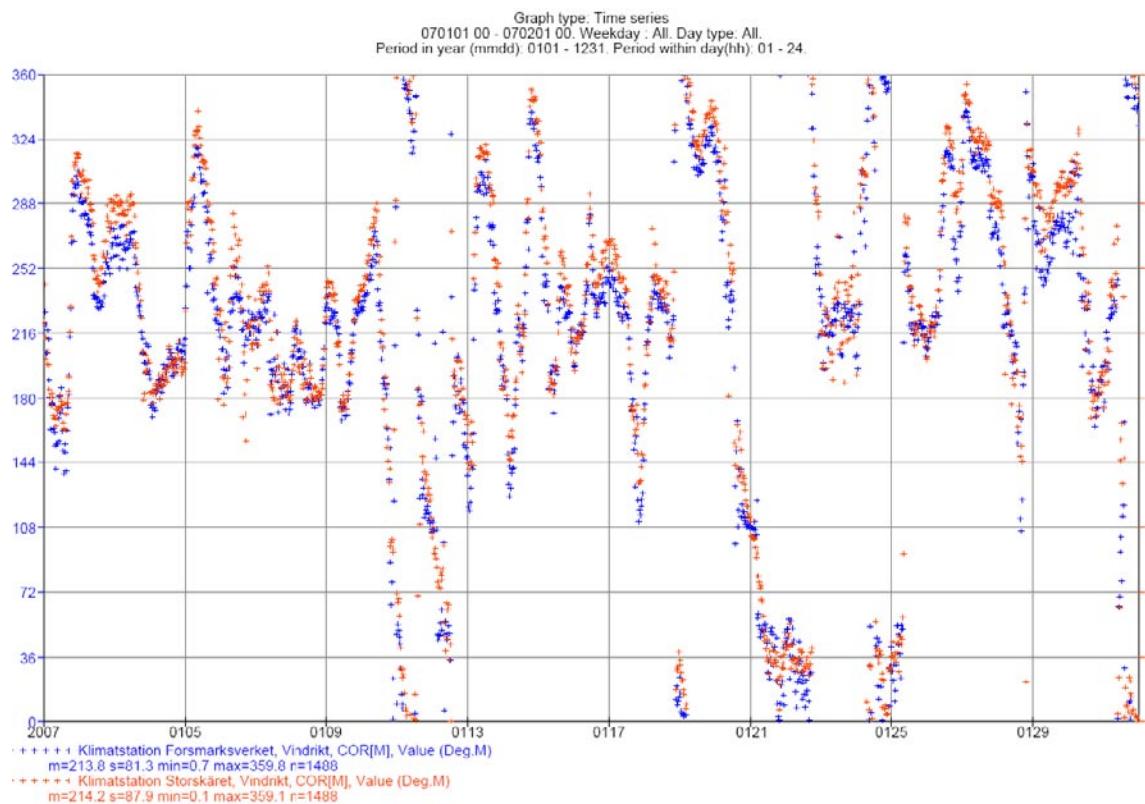


Figure A1-11. Wind direction in $^{\circ}$, 30-min values, January 2007.

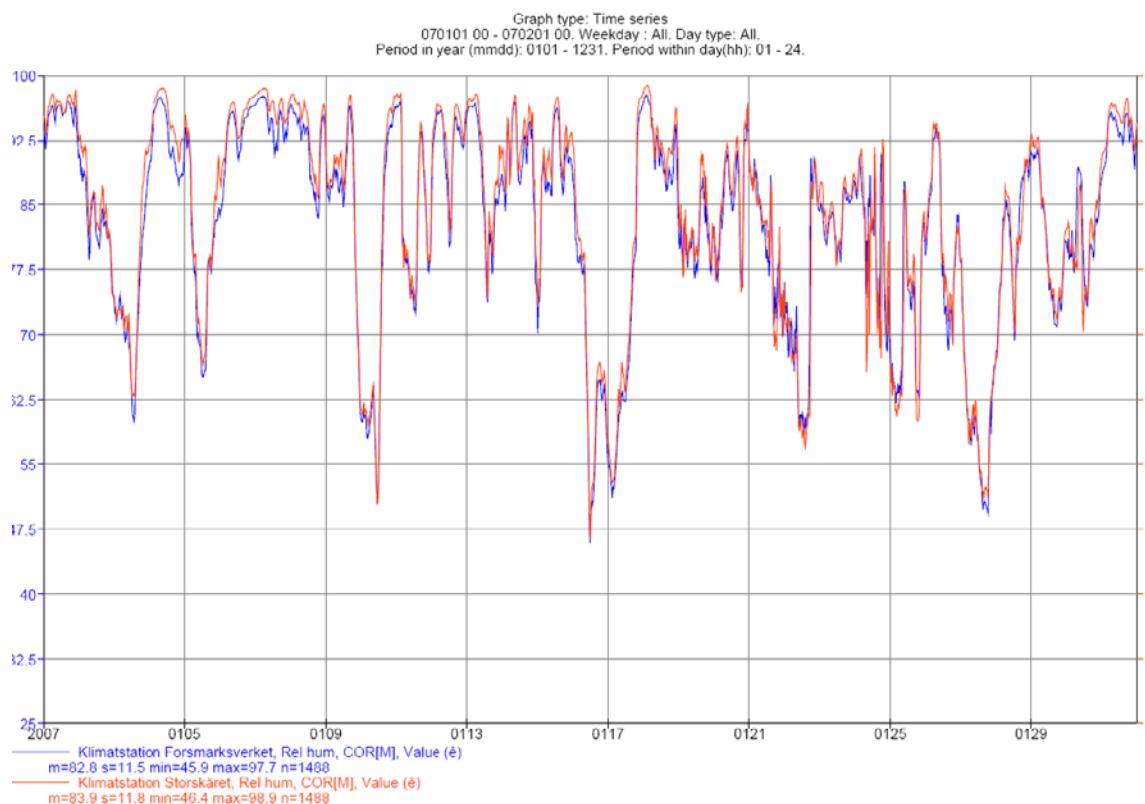


Figure A1-12. Relative humidity in %, 30-min values, January 2007.

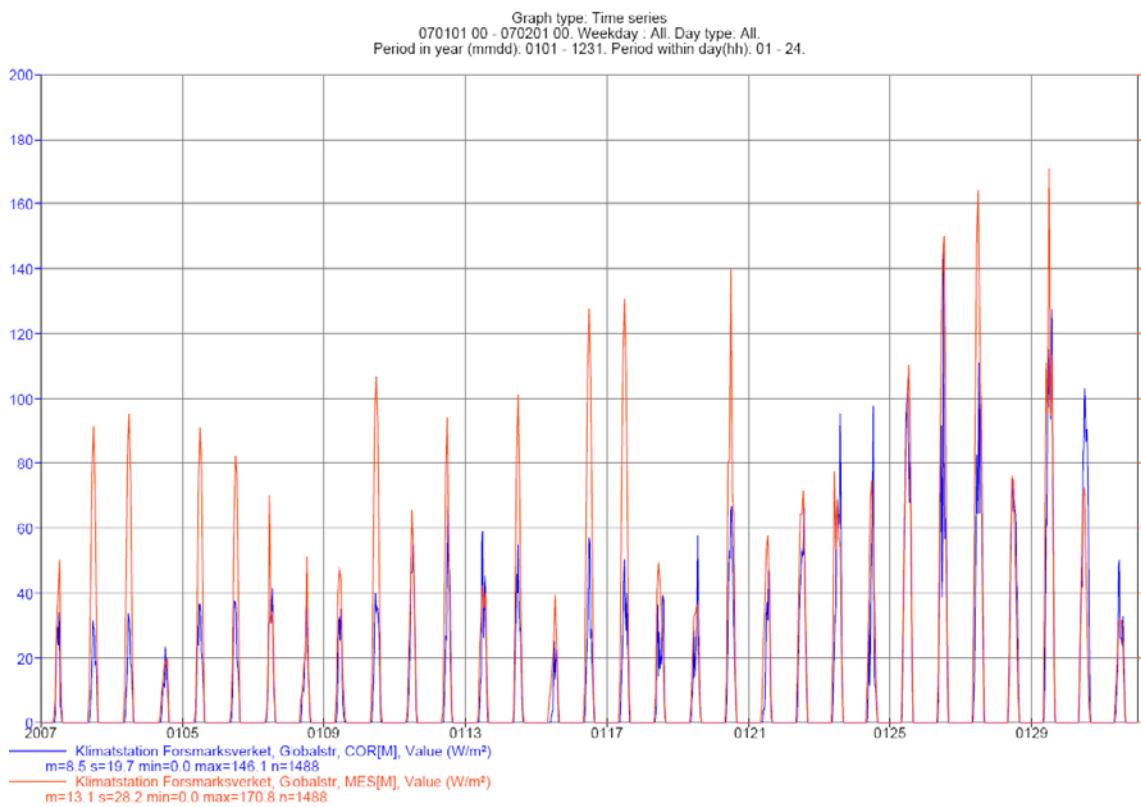


Figure A1-13. Global radiation in W/m^2 , 30-min values, January 2007.

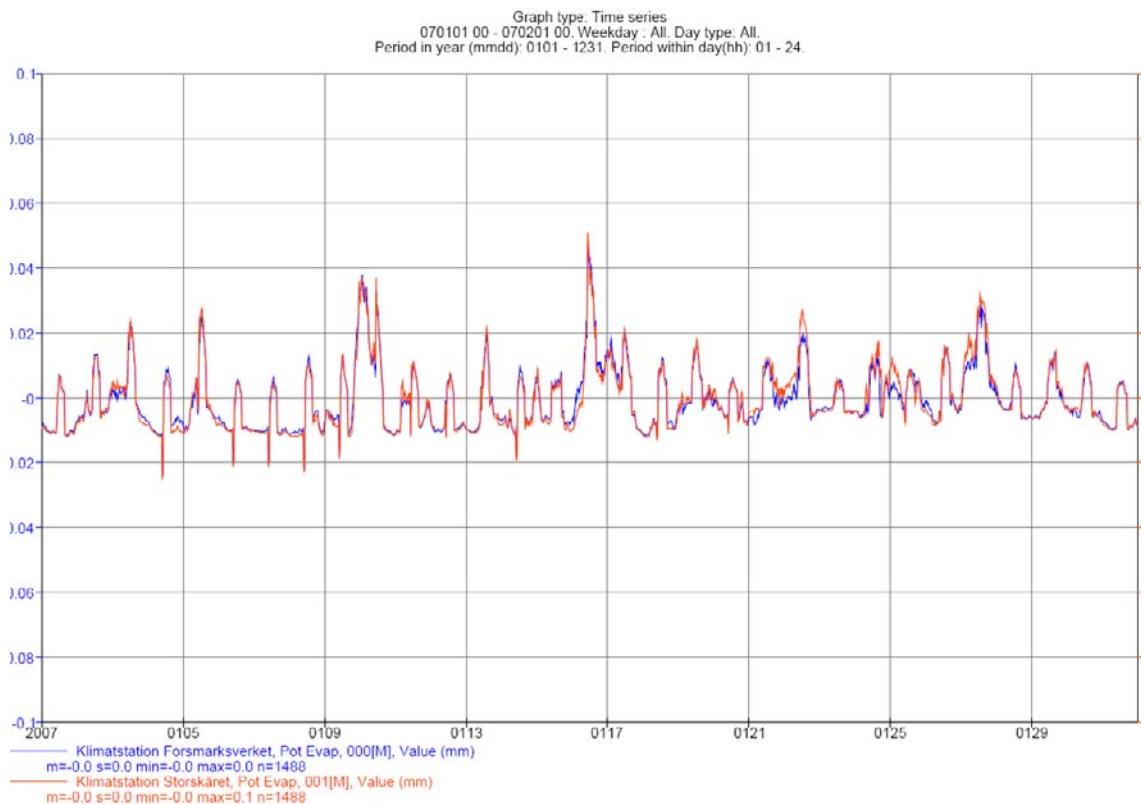


Figure A1-14. Potential evapotranspiration in mm, 30-min values, January 2007.

Appendix 2

Enkel bedömning av nederbördsmätförluster på fyra automatstationer

Av Hans Alexandersson

För fyra stationer med GEONOR-nederbördsmätare, två nära Forsmark och två nära Simpevarp, har en bedömning av mätförluster gjorts enligt samma kriterier som i /Alexandersson 2003/. För bedömningen användes främst ett antal foton samt kartor med det exakta läget. Efter att stationerna klassats med avseende på vindutsatthet las denna information in i samma program som tidigare körts för SMHI:s stationsnät.

Vindförlusterna är under i övrigt lika betingelser större för GEONOR-mätaren än för den traditionella manuella mätaren (SMHI-kannan) som används i Sverige. Därför läggs det på lite extra korrektion för GEONOR-mätaren inom respektive vindklass. För GEONOR-mätaren kombineras adhesions- och avdunstningförluster.

Följande vindklasser (1 perfekt, 7 ytterst olämplig) och temperaturstationer användes:

Högmasten	2	Singö
Storskäret	2	Singö
Äspö	4	Oskarshamn
Plittorp	2	Oskarshamn

Alla stationer utom i viss mån Äspö sitter alltså väldigt bra placerade. Klass 2 är en så gott som ideal placering, 4 är dock en placering som ger lite större förluster. I stort sett sitter tre av mätarna så bra det är möjligt i en kustzon med ofta relativt höga vindhastigheter i samband med nederbörd. Mätaren på Äspö sitter dock på en något välvd kulle med berg i dagen, men egentligen med tämligen bra skydd av träd för att vara en ö. Trädridåer finns på 20–30 meters håll i alla riktningar utom i någon smal glipa ungefär mot ostnordost. Tillhörande temperaturstationer användes för att ge ett mått på den genomsnittliga andelen snönederbörd.

Programmet som körts ger primärt uppmätta och korrigrade normalvärden. För dessa stationer har (fiktiva) uppmätta normalvärden tagits från nämnda grannstationer. Sedan har korrekctioner i % beräknats för varje månad utifrån dessa uppmätta respektive korrigrade värden. Det är mest praktiskt att använda faktorer och det ger inget nämnvärt fel (mot att t ex ge adhesionsfelet som ett absolutbelopp vid ett visst ”nederbördstillfälle”) sett över lite längre perioder.

Följande tabell med korrekctioner i % erhölls:

Plats	Jan	Feb	Mar	Apr	Maj	Jun	Jul	Aug	Sep	Okt	Nov	Dec
Högmasten	13	14	13	11	10	10	10	10	10	10	11	12
Storskäret	13	14	13	11	10	10	10	10	10	10	11	12
Äspö	21	21	19	16	14	14	14	14	14	16	17	20
Plittorp	12	13	12	10	10	9	9	10	10	10	10	12

För Högmasten och Storskäret, som fått identiska korrekctioner i denna bedömning, ska sålunda nederbördens i januari multipliceras med 1,13. Korrekctionen kan, då det bara är en faktor, tillämpas på timvärdens men man får behålla några decimaler så att summor över längre tid – beräknade som summor av timvärdens – blir korrigrade enligt samma faktor som vid en direkt korrektion av t ex en dygnssumma.

Vid en efterkontroll jämfördes korrigrade värden med motsvarande korrigrade manuella mätningar i närheten. Dessa jämförelser baserades dock bara på cirka två års mätningar. Manuella jämförelsestationer var främst Östhammar för Forsmarksmätarna och Kräkemåla för Simpevarpsmätarna. Även de ytäckande analyserna i Väder och Vatten utnyttjades. De först antagna vindförlustklasserna behövde därvid ej omprövas då de korrigrade mängderna föll in tillräckligt väl i mönstret. Vid jämförelsen var den mest släende olikheten att Östhammar hade närmare dubbelt nederbörd jämfört med Högmasten och Storskäret under höstmånaderna 2004. Vid en kontroll av hur analyserna såg ut för dessa månader var det dock släende hur stark gradiensen var i detta område. Nederbördens avtakning snabbt åt norr och nordväst längs denna del av Upplandskusten. För övrigt var det nästan motsatta förhållanden hösten 2003, medan det som helhet var mycket likartade och mycket starkt korrelerade månadsvärden.

Förslag på individuella korrekctioner för varje mätillfälle och som funktion av vindhastighet vid mätarens öppning samt rådande temperatur finns publicerade /Førland et al. 1996/. Dessa samband är dock ganska komplicerade att tillämpa, bl a då vind ej mäts vid själva nederbördsmätarens öppning. En sådan metod kan heller inte ta hänsyn till närmiljöns inflytande på vindfältet inklusive vertikavindarna, ett inflytande som kan vara stort i komplicerade miljöer. Här har vi i stället valt att satsa på en enklare korrektion vars huvudsyfte är att ge någotsånär sann nederbörd sett över en lite längre tid.

Slutligen kan sägas att röjning av buskar och kanske vid något tillfälle träd bör ske så ofta att inga buskar eller träd når mer än cirka 45° över horisonten sett från mätarens öppning. Röjning bör då troligen behöva utföras med några års mellanrum i de fall det inte är mest berg i dagen nära mätaren.

Referenser

Alexandersson H, 2003. Korrektion av nederbörd enligt enkel klimatologisk metodik. SMHI, Meteorologi, nr 111, 51 sidor.

Førland E J, Allerup P, Dahlström B, Elomaa E, Jónsson T, Madsen H, Perälä J, Rissanen P, Vedin H, Vejen F, 1996. Manual for operational correction of Nordic precipitation data. DNMI Klima 24/96, 66 pages.

Servicerapport Högmasten

FDS Mätteknik AB

SERVICERAPPORT

Station: Forsmark Högmast

Datum: 2007-05-28

Logger typ: CR10X

Loggerprogram med datum: FORSCM21 2004-09-30

Typ av mast, stag eller fristående: 100 m stagad

Höjd: installationer 10 meter

Temperaturgivare abs.

Typ: PT100

Visar värde: 18,10°C Ref: 18,03°C

Multiplikator föregående: 99,97

----- " ----- ny: --

Temperaturgivare i Rh probe

Uppmätt värde: 19,62°C Ref: 19,46°C

Luftfuktighet Vaisala 50Y

Uppmätt värde: 53,5% Ref: 52,4%

(Referens: Ny Rotronic MP101H S3 serie nr: 44256238)

Pyranometer

Typ: Kipp&Zonen CM21

Kontroll av fäste och planvinkel: OK

Kontrolleras mot referensgivare: CM21	Ref: (SKS1110)	378W	381W
---------------------------------------	------------------	------	------

(medelvärden 5 avläsningar)

Referens: SKYE SKS 1110 Serie Nr: 32631 (Kal dat: 20060803)

Regnmätare:

Typ: Geonor T-200 Vibrerande tråd

Kalibreringsvolym ml : 200ml 2007-06-28 10:05

Antal mm registrerat: 9,8

Rengöring: OK

Noteringar : 1% av volymen registrerades ej, Ej signifikant.

Horisontalvind

Mätarens resp. monteringsbommens riktning anges i grader eller mot siktat större objekt i terrängen.

Typ: RM Young Wind Monitor 05103-5

Bommens rikt: 233°

Mätarens rikt: 180°

Offset: 53°

GPS visar på 53° (2° magnetisk missvisning)

Kullager propeller: _____

Bytt 2007 05 28 (årligen)

Barometer:

Typ: Vaisala PTB101C

Visar: Kl 11:05 991,4hPa

Kontroll: Meteorologen

Kontroll mätskåp

Logger typ: CR10X

Modem typ: COM200E

Åskskydd: JA

Värmelement: Ja

Kondensfukt: Nej

Efterdragning av samtliga plintar: OK

Batteri byte utfört: Nytt 2004, Nästa byte 2008

Jordtagskontroll: EJ kontrollerat (Ej relevant)

Övriga noteringar:

Servicen utförd av: Anders Ekman

Skara 2007-07-05

FDS Mätteknik AB

Anders Ekman

Servicerapport Storskäret

FDS Mätteknik AB

SERVICERAPPORT

Station: Forsmark Storskäret

OBS: Storskäret Endast begränsad givarkontroll, Pga mätningarna avslutas.

Datum: 2007-05-28

Logger typ: CR10X

Loggerprogram med datum: FORGSM 2004-09-30

Typ av mast, stag eller fristående: 24 m fristående

Höjd: installationer 10 meter

Temperaturgivare abs.

Typ: PT100

Visat värde: 20,23°C Ref: 19,95°C

Multiplikator föregående: 99,97

----- " ----- ny: --

Temperaturgivare i Rh probe

Visat värde: 20,6°C Ref: 20,4°C

Luftfuktighet Vaisala 50Y

Visat värde: 47,9% Ref: 46,0%

(Referens: Ny Rotronic MP101H S3 serie nr: 44256238)

Pyranometer

N/A

Regnmätare:

Typ: Geonor T-200 Vibrerande tråd
Kalibreringsvolym ml : 200ml 2007-06-28 12:05
Antal mm registrerat: 9,6
Rengöring: OK
Noteringar : 2% av volymen registrerades ej, Ej signifikant.

Horisontalvind

Mätarens resp. monteringsbommens riktning anges i grader eller mot siktat större objekt i terrängen.

Typ: RM Young Wind Monitor 05103-5
Bommens rikt: 248°
Mätarens rikt: 180°
Offset: 68°

Kullager propeller: _____
Ej Bytt

Barometer:

N/A

Kontroll mätskåp

Logger typ: CR10X
Modem typ: GSM Siemens TC35
Åskskydd: ---
Värmelement: ---
Kondensfukt: ----
Efterdragning av samtliga plintar: ----
Batteri byte utfört: Nytt 2004, Nästa byte 2008
Jordtagskontroll: EJ kontrollerat (Ej relevant)

Övriga noteringar:

Servicen utförd av: Anders Ekman

Skara 2007-07-05
FDS Mätteknik AB

Anders Ekman