

**International
Progress Report**

IPR-09-11

Äspö Hard Rock Laboratory

Hydro Monitoring Program

Report for 2008

Eva Wass

Göran Nyberg

GEOSIGMA Uppsala

August 2009

Svensk Kärnbränslehantering AB

Swedish Nuclear Fuel
and Waste Management Co

Box 250, SE-101 24 Stockholm
Phone +46 8 459 84 00



**Äspö Hard Rock
Laboratory**

Report no.	No.
IPR-09-11	F53
Author	Date
Eva Wass	August 2009
Göran Nyberg	
Checked by	Date
Mansueto Morosini	2009-08-24
Approved	Date
Anders Sjöland	2009-08-25

Äspö Hard Rock Laboratory

Hydro Monitoring Program

Report for 2008

Eva Wass
Göran Nyberg
GEOSIGMA Uppsala

August 2009

Keywords: Groundwater, Borehole, Tunnel, Measurement methods, Äspö, HMS

This report concerns a study which was conducted for SKB. The conclusions and viewpoints presented in the report are those of the author(s) and do not necessarily coincide with those of the client.

Abstract

The Äspö island is situated close to the nuclear power plant of Simpevarp in south-eastern Sweden. As part of the pre-investigations preceding excavation of the Äspö Hard Rock Laboratory, registrations of the groundwater levels and electrical conductivity in packed-off borehole sections and levels in open boreholes started in 1987. The investigations are still ongoing and are planned to continue for a long period of time. As the tunnel excavation went on from the autumn 1990 and onwards, new boreholes were drilled in the tunnel and instrumented to enable groundwater pressure monitoring in packed-off sections. In addition, other hydro-related measurements such as water flow in the tunnel, electrical conductivity of tunnel water and inflow and outflow of water through tunnel pipes have been performed. This report is a summary of the monitoring during 2008.

In order to allow for comparison with factors that may influence the groundwater level/pressure and flow, meteorological data are also presented in the report.

From the end of 1991, the disturbance from the tunnel is the dominating factor influencing groundwater levels in the area. In one chapter, activities that may have an influence on the ground water situation are listed and briefly discussed.

Sammanfattning

Äspö ligger nära Oskarshamns kärnkraftverk i sydöstra Sverige. Som en del av förundersökningarna inför anläggningen av Äspölaboratoriet påbörjades 1987 registrering av grundvattennivå och elektrisk konduktivitet i avmanschetterade borrhålssektioner och nivå i öppna borrhål. Nivåmätningarna pågår fortfarande och planeras fortgå under lång tid framöver. Från hösten 1990, under det att tunneln drevs, borrades nya hål i tunneln som instrumenterades för att möjliggöra mätningar av grundvattentrycket i avmanschetterade sektioner. Därtill har andra hydrorelaterade mätningar gjorts i tunneln såsom: vattenflöde i tunneln, grundvattnets elektriska ledningsförmåga samt in- och utflöde av vatten i tunnelledningar. Denna rapport sammanfattar mätningar som gjorts under 2008.

För att kunna relatera förändringar till faktorer som kan påverka grundvattnets nivå/tryck och flöde presenteras även meteorologiska data i rapporten.

Från och med 1991, ett år efter det att tunneldrivningen startade, är störningen från tunneldrivningen den faktor som har störst påverkan på grundvattenytan i området. I ett kapitel redovisas och diskuteras översiktligt sådana aktiviteter som kan påverka grundvattnet.

Executive Summary

The construction of the Äspö Hard Rock Laboratory started in October 1990. The laboratory consists of an extensive tunnel system excavated down to a depth of 460 m below the ground surface. A 3.6 km long entrance tunnel to the laboratory, starting at the ground surface close to the nuclear power plant on the Simpevarp peninsula, has been excavated. Vertical shafts, connecting the laboratory with the ground surface of Äspö, were also drilled.

Extensive pre-investigations (e.g. aerial and ground geophysical surveys, mapping of solid rocks and borehole investigations) have been performed on:

- Äspö
- Ävrö
- Bockholmen
- Mjälén
- in the Laxemar area at the mainland west of Äspö

A large number of core and percussion boreholes have been drilled in these areas. One important part of the pre-investigations has been hydrogeological borehole investigations, such as different types of hydraulic tests, hydrochemical investigations, tracer tests and groundwater level registrations.

The objectives of the geohydrological investigations are 1) to document the groundwater conditions before, during and after excavating the laboratory tunnel system, 2) to obtain a data set of hydraulic, transport and chemical parameters and 3) to meet the regulations imposed by the water rights court. The obtained parameters are essential in order to improve predictions of transient processes, e.g. predictions of groundwater level changes, which is one consequence of the tunnel excavation.

The groundwater level registrations were initiated in 1987, before the start of the tunnel excavation. The results of these registrations have consecutively been presented in annual reports (Nyberg, et al, 1991-2008). Earlier reports only comprised data collected in surface boreholes but as from the annual report for 1995, data collected from measurements in the tunnel were also included. The present paper is the annual report covering the year 2008. The following data have been collected:

1. Groundwater level data in surface boreholes
2. Groundwater pressure in tunnel boreholes
3. Water flow in tunnel
4. Water flow in tunnel pipes
5. Electrical conductivity of tunnel water
6. Temperature, humidity and pressure of tunnel air

7. Precipitation
8. Air temperature
9. Potential evaporation

From 2006, the meteorological data are collected at the SKB meteorological station Norra Äspö situated at the northern part of Äspö. Up to 2005 the meteorological data were collected at the SMHI (Swedish Meteorological and Hydrological Institute) stations situated closest to the investigation area.

During 2008, there were 132 boreholes involved in the hydro-monitoring program within the four investigation areas and in the tunnel. Most of the boreholes are equipped with one or several rubber packers, which isolate up to ten borehole sections.

In the tunnel, 25 gauging boxes equipped with a v-notch weir are installed for flow measurements. Electrical conductivity of tunnel water has been measured at eleven locations. Water flow out of the tunnel in the discharge pipe is measured at 0/700 m tunnel length. Temperature, humidity and pressure of tunnel air are also measured at several positions in the tunnel.

During the spring of 1991, the tunnel excavation began to affect the groundwater level in many surface boreholes. During 1992 and 1993 the effect of the tunnel was evident in all investigation areas except at Laxemar. In the areas on Äspö located near the tunnel spiral, the drainage caused by the tunnel has resulted in dramatic effects in many boreholes. In some borehole sections, the level has declined as much as 100 metres. Since 1994 the levels have gradually stabilised and during the last years the level decline in most boreholes has been within some metre. During 2008, the level changes were relatively small, within ± 1 m in most boreholes. Even if the changes are rather small, the long-term overall picture is that a small decrease is still ongoing in many boreholes on the Äspö island as a result of the excavation of the Äspö HRL. During certain periods this decrease may be balanced by meteorological conditions resulting in increasing groundwater levels.

In many tunnel boreholes, the pressure was still decreasing (about 5-100 kPa, i.e. 0.5-10 m) during 2008, but there were also a large number of sections, mainly in the deeper part of the tunnel, with increasing pressure. Due to a lot of activities in the tunnel during the year (e.g. blasting of a new tunnel, drilling, packer expansion and releases, opening, closing and pumping various boreholes), it is difficult to say whether the pressure changes are “natural” or due to the activities.

The flow in most gauging boxes has decreased if one compares the mean flow for the period October – December for the latest fourteen years. A few exceptions to this, especially in the deepest parts of the tunnel system, can be related to various activities. During the comparison period October – December, 1686 m³/d was pumped out from the tunnel during 2008, which is approximately 16 m³/d less than during the same period 2007.

The total amount of precipitation during 2008 was 525 mm (Norra Äspö), which is 28 mm less than the mean for the comparison period 1961-90 (Oskarshamn). Large amounts were measured in August and October while the precipitation in February and May was only 8 mm for each month.

Contents

1	Introduction	11
2	Boreholes	15
2.1	Surface boreholes	15
2.2	Tunnel boreholes	18
3	Measurement methods	21
3.1	Data collection	21
3.2	Groundwater level measurements in surface boreholes	23
3.2.1	Monitoring in surface boreholes	23
3.2.2	Absolute pressure in borehole sections	24
3.2.3	Calibration method	25
3.3	Groundwater pressure in tunnel boreholes	26
3.3.1	Monitoring in tunnel boreholes	26
3.4	Water flow in tunnel	32
3.4.1	Instrumentation	32
3.4.2	Methods	34
3.4.3	Accuracy	34
3.5	Water flow in tunnel pipes	34
3.5.1	Methods	34
3.6	Electrical conductivity of tunnel water	35
3.6.1	Methods	36
3.6.2	Accuracy	36
3.7	Temperature, humidity and pressure of tunnel air	36
3.7.1	Instrumentation	36
3.8	Meteorological data	36
3.8.1	Precipitation	37
3.8.2	Temperature	37
3.8.3	Potential Evapotranspiration	37
4	Summary of activities influencing groundwater levels, pressure and flow	39
4.1	General	39
4.2	Tunnel excavation and permanent reinforcement	39
4.3	Opening of valves in tunnel boreholes	42
4.4	Packer expansion and release	43
4.5	Drilling	44
4.6	Tests	49

5	Results	51
5.1	Groundwater levels in surface boreholes	51
5.2	Groundwater pressure in tunnel boreholes	51
5.3	Water flow in the tunnel	52
5.4	Water flow in tunnel pipes	53
5.5	Electrical conductivity of tunnel water	54
5.6	Temperature, humidity and pressure of tunnel air	54
5.7	Precipitation	55
5.8	Air temperature	56
5.9	Potential evapotranspiration	57
6	References	59

Appendices attached on CD

Appendix 1	Groundwater levels in surface boreholes
Appendix 2	Groundwater pressure in tunnel boreholes
Appendix 3	Water flow in the tunnel
Appendix 4	Water flow in tunnel pipes
Appendix 5	Electrical conductivity of tunnel water
Appendix 6	Temperature, humidity and pressure of tunnel air

1 Introduction

Since October 1990, construction work for the Äspö Hard Rock Laboratory, situated a few kilometres north of the nuclear power plant of Simpevarp in south-eastern Sweden (Figure 1-1), are in progress. The laboratory extends to a depth of 460 m below the ground surface of the small island of Äspö. The entrance tunnel, starting at the ground surface on the mainland close to the nuclear power plant, has a length of about 3.6 km. Three vertical shafts (one elevator and two ventilation shafts), which connect the laboratory with the ground surface of Äspö, have been excavated. A large number of surface boreholes have been drilled on Äspö and on the adjacent islands of Ävrö, Bockholmen and Mjälén and in the Laxemar area on the mainland west of Äspö (Figure 1-2).

The groundwater level investigations in surface boreholes performed to this date have been described in several progress reports. The groundwater level registrations are ongoing since 1987. The measurements have continued during the entire period of tunnel excavation and will go on for a long period afterwards. The registrations are presented in annual reports (Nyberg et al, 1991-2008). The first report, however, contained groundwater level data from three years: 1987-89 (Nyberg et al, 1991). As from the report for 1995, tunnel data are also included. The present paper is the annual report covering the year 2008. The following data have been collected:

- 1) groundwater level in surface boreholes
- 2) groundwater pressure in tunnel boreholes
- 3) water flow in tunnel
- 4) water flow in tunnel pipes
- 5) electrical conductivity of tunnel water
- 6) temperature, humidity and pressure of tunnel air

Background data considered necessary for interpreting changes of groundwater levels are also presented in the report. This includes:

- 7) precipitation from northern Äspö
- 8) air temperature from northern Äspö
- 9) potential evapotranspiration from northern Äspö



Figure 1-1. Location of the Äspö Hard Rock Laboratory area and of the stations used to collect background data. Gladhammar, Målilla and Oskarshamn are SMHI's meteorological stations used in the report.

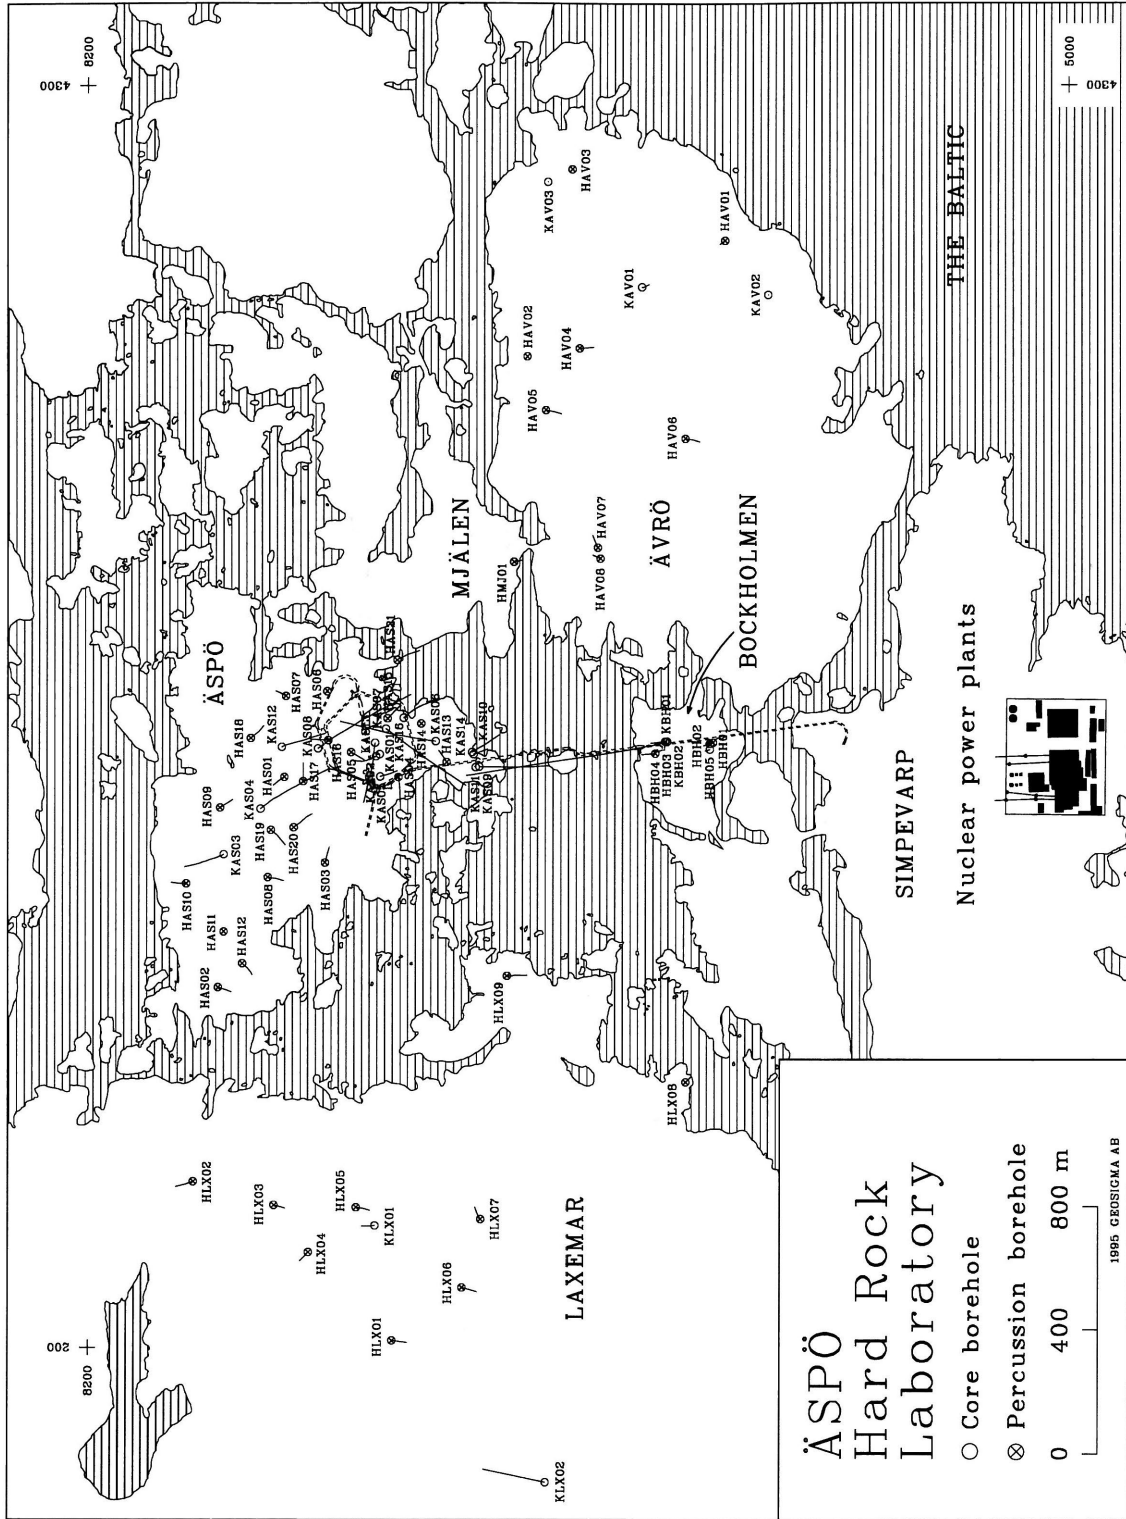


Figure 1-2. The investigation area with borehole locations.

2 Boreholes

2.1 Surface boreholes

The locations of the boreholes are shown in Figure 1-2. The extent of the monitoring program for surface boreholes during 2008 is shown in Table 3-3.

Table 2-1 presents borehole orientation (inclination and bearing), borehole length, elevation of the top of casing, length of casing and the date for completion of drilling for each surface borehole.

The height above ground for the top of casing is normally less than half a meter, typically about 30 cm.

Table 2-1. Borehole deviation, length, elevation of top of casing, length of casing and date for the completion of drilling.

Borehole	Inclination at ground (°)	Bearing * at ground (°)	Borehole length (m)	Elevation ** at top of casing (m.a.s.l)	Length of casing (m)	Drilling completed (yymmdd)
HAS01	-60.7	327	100.0	6.38	1.2	870807
HAS02	-55.4	198	93.0	2.11	1.6	870801
HAS03	-55.6	108	100.0	2.36	1.6	870803
HAS04	-61.2	257	201.0	6.26	1.4	870804
HAS05	-58.1	207	100.0	6.31	1.4	870806
HAS06	-88.1	261	100.0	4.80	1.0	870806
HAS07	-61.5	30	100.0	3.76	2.0	870801
HAS08	-58.0	189	125.0	6.62	1.5	880319
HAS09	-59.3	150	125.0	7.84	1.5	880320
HAS10	-60.6	2	125.0	6.35	1.5	880322
HAS11	-89.3	356	125.0	5.59	1.5	880323
HAS12	-59.9	222	125.0	2.88	1.5	880325
HAS13	-60.3	60	100.0	2.05	3.0	881211
HAS14	-88.0	255	100.0	1.67	1.5	890117
HAS15	-60.0	136	120.0	4.19		890419
HAS16	-60.0	5	120.0	4.36		890415
HAS17	-60.0	90	120.0	7.89		890417
HAS18	-62.2	147	150.0	7.54	6.0	900319
HAS19	-57.3	220	150.0	8.97	6.0	900313
HAS20	-60.5	142	150.0	6.24	6.0	900319
HAS21	-60.0	151	148.0	3.04	3.0	911106
HAV01	-88.6	334	175.0	9.27		860813
HAV02	-89.1	137	163.0	6.08		860821
HAV03	-88.0	160	134.2	9.17		860824
HAV04	-60.1	180	100.0	7.97	0.4	870724
HAV05	-54.5	191	100.0	6.83	1.0	870728
HAV06	-59.5	190	100.0	12.39	1.2	870730
HAV07	-56.2	66	100.0	4.14	4.0	870728
HAV08	-61.9	28	63.0	7.05		870909
HBH01	-58.5	352	50.6	4.71	3.0	910220
HBH02	-47.5	346	32.4	4.68	3.0	910221
HBH03	-58.2	356	100.0	5.92	1.2	910306
HBH04	-59.7	356	90.4	5.52	5.1	920506
HBH05	-45.0	347	22.0	2.97	6.7	920601
HLX01	-59.4	190	100.63	8.87	3.0	871021
HLX02	-59.3	339	132.0	9.01	0.6	871027

Borehole	Inclination at ground (°)	Bearing * at ground (°)	Borehole length (m)	Elevation ** at top of casing (m.a.s.l)	Length of casing (m)	Drilling completed (yymmdd)
HLX03	-63.1	200	100.0	10.43	1.4	871104
HLX04	-65.2	316	125.0	10.33	1.2	871106
HLX05	-59.9	188	100.0	15.68	0.6	871105
HLX06	-58.6	195	100.0	15.45	1.0	871030
HLX07	-60.8	62	100.0	8.58	1.0	871103
HLX08	-47.8	134	40.0	2.19	6.0	911114
HLX09	-61.3	178	151.0	3.28	3.0	911121
HMJ01	-60.0	182	46.0	1.39	6.0	911030
KAS01	-85.0	330	101.00	8.18	1.00	871029
KAS02	-84.5	331	924.04	7.68	1.05	871221
KAS03	-82.9	339	1002.26	8.79	1.11	880407
KAS04	-59.9	141	480.98	11.66	100.70	880501
KAS05	-84.9	164	549.60	8.68	1.05	890226
KAS06	-59.6	8	602.94	5.16	1.30	890128
KAS07	-59.1	218	603.88	4.58	1.15	890105
KAS08	-59.0	146	601.49	7.66	100.00	881223
KAS09	-59.9	182	450.62	4.08	100.65	891121
KAS10	-60.0	162	99.93	3.72	2.50	891023
KAS11	-88.7	35	248.90	4.22	6.00	900220
KAS12	-69.9	162	380.48	4.83	6.00	900319
KAS13	-62.2	281	406.95	3.84	6.00	900313
KAS14	-61.3	149	211.85	3.35	6.00	900511
KAS16	-84.5	139	548.46	3.66	6.00	920902
KAV01	-89.2	237	502.00			770516
			746.60			861116
			757.31	14.07	68.04	040110
KAV02	-89.5	39	97.10	7.52	12.40	770531
KAV03	-89.4	146	248.40	8.71	2.80	861005
KBH02	-45.0	348	706.35	5.50	5.50	900517
KLX01	-85.3	1	702.11		0-101.30	880205
			1077.99	16.74	268.3-702.1	900804
KLX02	-85.0	9	1700.50	18.37	202.95	921129

* Degrees (0-360) measured clockwise in local system ÄSPÖ96. Magnetic bearing is obtained by subtracting 11.8°.

** Measured in local system ÄSPÖ96. Elevation in RT90-RHB70 is obtained by adding 0.03 m.

The borehole diameters are presented in Table 2-2. Most boreholes are enlarged in the uppermost part to allow for the installation of casing. All core boreholes except four are "telescope drilled"; i.e. the diameter of the upper part is larger than below. Exceptions are KAS01 and KAS10, where drilling was unsuccessful, and KAV02 and KAV03, which were not telescope drilled. Normally, the enlarged part has a length of approximately 100 m. All telescope drilled core boreholes have an enlargement (approximately 1 m long) where the diameter changes to make room for a funnel-shaped pipe, which gives a smooth transition between the two borehole diameters.

Table 2-2. Borehole diameters.

Borehole	Length of borehole		Nominal diameter	Borehole	Length of borehole		Nominal diameter
	from	to	(mm)		from	to	(mm)
	(m)	(m)			(m)	(m)	
HAS01	0.00	100.00	115	KAS01	0.00	95.85	115
HAS02	0.00	93.00	115		95.85	101.00	115
HAS03	0.00	100.00	115	KAS02	0.00	93.35	155
HAS04	0.00	201.00	115		93.35	924.04	56
HAS05	0.00	100.00	115	KAS03	0.00	1.11	?
HAS06	0.00	100.00	115		1.11	100.80	164
HAS07	0.00	100.00	115		100.80	1002.26	56
HAS08	0.00	125.00	115	KAS04	0.00	100.70	155
HAS09	0.00	125.00	115		100.70	480.98	56
HAS10	0.00	125.00	115	KAS05	0.00	150.00	164
HAS11	0.00	125.00	115		150.00	549.60	76
HAS12	0.00	125.00	115	KAS06	0.00	100.00	164
HAS13	0.00	100.00	115		100.00	602.94	56
HAS14	0.00	100.00	115	KAS07	0.00	100.00	164
HAS15	0.00	120.00	115		100.00	603.88	56
HAS16	0.00	120.00	115	KAS08	0.00	100.00	164
HAS17	0.00	120.00	115		100.00	601.49	56
HAS18	0.00	6.00	250	KAS09	0.00	100.65	167
	6.00	150.00	162		100.65	450.62	56
HAS19	0.00	6.00	250	KAS10	0.00	99.93	56
	6.00	150.00	158	KAS11	0.00	40.40	160
HAS20	0.00	6.00	250		40.40	248.90	56
	6.00	150.00	152	KAS12	0.00	100.05	167
HAS21	0.00	148.00	115		100.05	380.48	56
				KAS13	0.00	100.20	162
HAV01	0.00	175.00	110		100.20	104.35	56
HAV02	0.00	163.00	110		104.35	257.45	76
HAV03	0.00	134.20	110		257.45	406.95	56
HAV04	0.00	100.00	115	KAS14	0.00	100.44	164
HAV05	0.00	100.00	115		101.40	211.85	56
HAV06	0.00	100.00	115	KAS16	0.00	100.00	164
HAV07	0.00	100.00	115		100.00	548.46	56
HAV08	0.00	63.00	76				
				KAV01	0.04	68.74	200
HBH01	0.00	50.60	115		68.74	68.84	165
HBH02	0.00	32.40	115		68.84	70.04	76
HBH03	0.00	100.00	115		70.04	757.31	56
HBH04	0.00	90.40	115	KAV02	0.00	97.10	56
HBH05	0.00	22.00	115	KAV03	0.00	248.40	56
HLX01	0.00	100.63	115	KBH02	0.00	101.50	165
HLX02	0.00	132.00	115		101.50	706.35	56
HLX03	0.00	100.00	115	KLX01	0.00	1.00	?
HLX04	0.00	125.00	115		1.00	101.30	155
HLX05	0.00	100.00	115		101.30	702.11	76
HLX06	0.00	100.00	115		702.11	1077.99	56
HLX07	0.00	100.00	115				
HLX08	0.00	40.00	115	KLX02	0.40	3.00	304
HLX09	0.00	151.00	115		3.00	200.80	215
					200.80	201.00	165
HMJ01	0.00	46.00	115		201.00	202.95	92
					202.95	1700.50	76

2.2 Tunnel boreholes

The borehole orientation (inclination and bearing), borehole length, borehole diameter, elevation of the starting point at the tunnel wall, length of casing and the date for completion of drilling for tunnel boreholes are presented in Table 2-3. Only those boreholes that have been monitored within the HMS during 2008 are listed.

Many boreholes are enlarged in the outermost (closest to the tunnel) 2 - 2.5 metres to enable installation of casing. Except for HA1283B and KA3065A03, which were lengthened with a smaller diameter, the diameter inside the casing enlargement does not change. During 2007, over-core drilling was performed in borehole KA3065A03.

Table 2-3. Borehole deviation, length, minimum diameter, elevation at tunnel wall, length of casing and date for the completion of drilling.

Borehole	Inclination at top of b.h. (°)	Bearing * at top of b.h. (°)	Borehole length (m)	Minimum diameter (mm)	Elevation** at tunnel wall (m.a.s.l.)	Length of casing (m)	Drilling completed (yyymmdd)
HA1273A	10.7	351.3	30.0	57	-174.23	2.00	920423
HA1278A	4.3	304.8	29.0	57	-175.68	2.00	920910
HA1279A	2.8	311.6	24.0	57	-175.65	2.00	920910
HA1283B	-8.0	352.7	35.5	57	-176.55	2.00	920415
			40.2	51			
HA1327B	-0.5	140.0	29.5	57	-182.81	2.00	920911
HA1330B	-0.5	100.0	32.5	57	-182.99	No c.	920911
HD0025A	7.0	88.7	15.0	57	-416.70	No c?	941111
KA1061A	0.6	349.6	208.5	56	-144.93	2.00	920123
KA1131B	-12.9	0.5	203.1	56	-155.30	2.00	920212
KA1751A	5.2	274.2	149.91	56	-237.56	2.00	930504
KA1754A	-26.2	299.9	159.88	56	-237.84	2.00	930519
KA1755A	-19.9	339.4	320.58	56	-237.80	2.42	940406
KA2048B	-10.6	190.9	184.45	56	-275.43	2.00	930216
KA2050A	-53.5	55.3	211.57	56	-275.79	2.50	931102
KA2162B	-15.2	272.2	288.1	56	-289.87	2.50	930401
KA2511A	-33.3	234.8	293.0	56	-335.88	2.50	930905
KA2563A	-42.5	237.2	363.43	56	-340.79	2.05	960924
KA2598A	-32.2	292.6	300.77	56	-342.39	No c?	930928
KA2858A	-4.3	287.0	59.7	56	-379.38	2.50	950115
KA2862A	-8.0	15.9	15.98	56	-379.54	2.50	950125
KA3005A	-4.5	299.1	58.11	56	-399.86	2.50	941205
KA3010A	-4.7	99.5	60.66	56	-399.87	2.50	941208
KA3065A02	-5.1	59.8	69.95	76	-408.25	2.55	990422
KA3065A03	-4.5	55.8	9.20	300	-408.09	?	
			10.40	196			000206
			11.35	36			011003
			0 - 12.11	300			070503
KA3067A	-4.7	98.4	40.05	56	-408.59	2.50	941211
KA3068A	2.8	113.8	16.85	86	-408.38	No c?	940603
KA3105A	-4.7	102.5	68.95	56	-413.68	2.50	941215
KA3110A	-5.4	238.3	26.83	56	-413.71	2.50	941217
KA3385A	-4.1	176.2	34.18	56	-445.99	No c.	950110
KA3386A01	-1.9	219.9	65.11	76	-446.11	2.51	020615
KA3510A	-30.1	255.3	150.06	76	-448.70	2.35	960909
KA3539G	-80.5	274.2	30.01	76	-449.19	No c.	980513
KA3542G01	-44.9	188.7	30.04	76	-449.07	No c.	980603
KA3542G02	-44.2	6.3	30.01	76	-449.07	No c.	980605
KA3543A01	-0.8	234.1	2.06	56	-446.80	No c.	001005
KA3543I01	70.5	195.5	2.06	56	-444.08	No c.	001011
KA3544G01	-90.0	0.0	12.0	76	-448.95	No c.	980325
KA3546G01	-89.8	194.0	12.0	76	-448.89	No c.	980324
KA3548A01	-3.1	188.3	30.0	76	-446.58	2.50	980628

Borehole	Inclination at top of b.h. (°)	Bearing * at top of b.h. (°)	Borehole length (m)	Minimum diameter (mm)	Elevation** at tunnel wall (m.a.s.l.)	Length of casing (m)	Drilling completed (yymmdd)
KA3548D01	2.7	52.6	2.06	56	-445.87	No c.	001006
KA3548G01	-89.7	75.8	12.01	76	-449.00	No c.	980323
KA3550G01	-89.2	249.0	12.03	76	-448.77	No c.	980322
KA3550G05	-89.2	25.0	3.0	56	-448.96	No c.	001030
KA3551G05	-89.9	356.1	3.1	56	-448.91	No c.	001027
KA3552A01	-2.8	233.6	2.06	56	-446.62	No c.	000928
KA3552G01	-89.5	130.6	12.01	76	-448.77	No c.	980321
KA3552H01	58.2	267.7	2.1	56	-443.98	No c.	001012
KA3553B01	-37.7	8.1	2.02	56	-446.55	No c.	001004
KA3554G01	-45.0	188.2	30.01	76	-448.83	No c.	980607
KA3554G02	-45.0	8.2	30.01	76	-448.82	No c.	980606
KA3557G	-81.5	271.2	30.04	76	-448.85	No c.	980512
KA3563A01	-7.7	233.8	2.06	56	-447.06	No c.	000922
KA3563D01	2.5	53.7	2.01	56	-446.15	No c.	000925
KA3563G	-79.9	277.9	30.0	76	-448.69	No c.	980507
KA3563I01	73.0	235.9	2.15	56	-443.64	No c.	001011
KA3566C01	3.5	232.3	2.1	56	-445.56	No c.	000920
KA3566G01	-44.9	188.8	30.01	76	-448.57	No c.	980609
KA3566G02	-43.8	7.7	30.01	76	-448.57	No c.	980610
KA3568D01	-2.3	54.4	2.3	56	-445.83	No c.	000925
KA3572G01	-89.6	225.0	12.0	76	-448.51	No c.	980320
KA3573A	-2.1	188.3	40.07	76	-446.07	2.65	970911
KA3573C01	34.9	232.3	2.05	56	-445.13	No c.	000926
KA3574D01	12.6	55.5	2.05	56	-445.12	No c.	000926
KA3574G01	-89.2	249.0	12.0	76	-448.33	No c.	980428
KA3576G01	-89.2	213.7	12.01	76	-448.27	No c.	980426
KA3578C01	-5.4	232.4	2.09	56	-445.34	No c.	000928
KA3578G01	-89.0	252.7	12.58	76	-448.38	No c.	980319
KA3578H01	59.1	266.7	1.9	56	-443.38	No c.	001002
KA3579D01	-1.0	54.2	2.0	56	-445.43	No c.	000922
KA3579G	-89.4	296.6	22.65	76	-448.37	No c.	971008
KA3584G01	-89.2	212.5	12.0	76	-448.25	No c.	980319
KA3588C01	-4.0	232.8	2.04	56	-445.44	No c.	000926
KA3588D01	-1.8	55.0	1.9	56	-445.24	No c.	000925
KA3588I01	65.6	5.2	1.96	56	-443.34	No c.	001019
KA3590G01	-44.4	186.7	30.06	76	-448.06	No c.	980623
KA3590G02	-43.8	7.9	30.05	76	-448.08	No c.	980616
KA3592C01	4.4	233.8	2.1	56	-445.25	No c.	000926
KA3593G	-79.8	275.2	30.02	76	-448.07	No c.	980504
KA3597D01	3.1	53.5	2.22	56	-445.10	No c.	001004
KA3597H01	55.1	248.8	2.06	56	-443.18	No c.	001005
KA3600F	-1.7	248.4	50.1	76	-445.58	2.65	970924
KF0051A01	29.9	310.3	11.70	76	-451.38	2.50	980527
KF0069A01	-1.8	28.9	70.09	76	-454.82	2.54	020521
KG0021A01	17.7	220.1	48.82	76	-445.15	2.50	980708
KG0048A01	14.0	222.4	54.69	76	-444.49	2.42	980804
KI0023B	-20.7	214.6	200.71	76	-447.69	2.65	971120
KI0025F	-20.2	187.1	193.8	76	-448.23	2.50	970425
KI0025F02	-25.5	200.0	204.18	76	-448.53	2.65	980825
KI0025F03	-29.8	206.9	141.72	76	-448.08	2.50	990813
KXTT1	-45.6	61.5	28.76	56	-392.12	2.50	950518
KXTT2	-44.5	61.2	18.3	56	-392.42	2.50	950522
KXTT5	-14.9	47.7	25.85	76	-390.30	2.55	990505
SA3045A	-10.5	132.2	20.7	57	-405.42	No c?	940227

* Degrees (0-360) measured clockwise in local system ÄSPÖ96. Magnetic bearing is obtained by subtracting 11.8°.

** Measured in local system ÄSPÖ96. Elevation in RT90-RHB70 is obtained by adding 0.03 m.

3 Measurement methods

3.1 Data collection

All data are collected by means of different types of pressure transducers connected to different types of logger units or by manual levelling.

In the tunnel, pressure in borehole sections are measured either via a hydraulic multiplexer or by individual transducers for each section connected directly to a Borre logger, a Datascan unit or a Datataker logger. The hydraulic multiplexer holds a pressure transducer connected to a Borre logger of a type that can operate the magnetic valves on the multiplexer.

Below follows a summary of the units that are used.

BorreR is a logger with a 16 bits A/D converter. This logger communicates with a measurement station either by radio or via the power line. Used at the ground surface only.

BorreT is a logger with a 16 bits A/D converter communicating with a measurement station in a Borre data network. This logger, which can operate magnetic valves on a hydraulic multiplexer, is used in the tunnel only.

Datascan has a 16 bits A/D converter. This unit has no data storing facility and is connected directly to a measurement station. It is used in the tunnel only.

DataTaker is a data logger connected on-line to a measurement station by means of radio or network. The logger has 42 channels and is used in the tunnel only.

The logger types used for surface boreholes are presented in Table 3-1.

In Table 3-2, the data-collecting units used for pressure measurements in borehole sections in the tunnel are presented.

Table 3-1. Monitoring equipment in surface boreholes.

Borehole	Sect. no	Equipment	Date from	to	Borehole	Sect. no	Equipment	Date from	to
HAS01	1	BorreR	91-09		HAV03	1	Manually	000917	
HAS02	1	Manually	970320		HAV04	1	Manually	000917	
HAS03	1	Manually	981018		HAV08	1	Manually	060504	
HAS05	1	Manually	970320		HBH01	1	Manually	040101	
HAS06	1	BorreR	91-09		HBH02	1	Manually	040101	
HAS07	1	BorreR	970218		HBH04	1	Manually	050530	
HAS08	1	Manually	970130			2	Manually	91-03	
HAS09	1	Manually	970320		HLX03	1	Manually	000917	
HAS10	1	Manually	970320		HLX04	1	Manually	970129	
HAS11	1	Manually	060504		HLX05	1	Manually	050530	
HAS12	1	Manually	970320		KAS03	1-6	BorreR	91-09	
HAS13	1	BorreR	91-09		KAS04	1	Manually	970320	
HAS14	1	Manually	970320		KAS07	1	Manually	970220	
HAS15	1	Manually	041002		KAS09	1-5	BorreR	91-09	
HAS16	1	BorreR	91-09		KAS10	1	BorreR	91-09	
HAS17	1	Manually	050419		KAS11	1	Manually	970320	
HAS18	1	Manually	970227		KAS14	1	Manually	970320	
HAS19	1	Manually	050419		KAS16	1	Manually	92-10	
HAS20	1	Manually	970130			2-4	Manually	041002	
HAS21	1	BorreR	970130		KBH02	3-6	Manually	050530	
HAV01	1	Manually	000917						

Note - Data not relevant for 2008 is to be found in earlier annual reports.

Table 3-2. Monitoring equipment in tunnel boreholes.

Borehole	Sect. no	Equipment	Date from	to	Borehole	Sect. no	Equipment	Date from	to
HA1273A	1	HM +BorreT			KA3510A	1-3	Datascan	981027	
HA1278A	1	HM+BorreT				4-5	Datascan	010518	
HA1279A	1	HM+BorreT			KA3539G	1-4	Datascan	030508	
HA1283B	1	HM+BorreT			KA3542G01	1-5	Datascan	030508	
HA1327B	1	HM+BorreT			KA3542G02	1-5	Datascan	030508	
HA1330B	1	HM+BorreT			KA3543A01	1	Datascan	030508	
HD0025A	1	Datascan	990602		KA3543I01	1	Datascan	030508	
KA1061A	1	HM+BorreT			KA3544G01	1-3	Datascan	030508	
KA1131B	1	HM+BorreT			KA3546G01	1-3	Datascan	030508	
KA1751A	1-3	DataTaker	071106		KA3548A01	1-4	Datascan	030508	
KA1754A	1-2	DataTaker	071106		KA3548D01	1	Datascan	030508	
KA1755A	1-4	DataTaker	071106		KA3548G01	1-2	Datascan	030508	
KA2048B	1-4	HM+BorreT		080123	KA3550G01	1-3	Datascan	030508	
	1-4	DataTaker	080206		KA3550G05	1	Datascan	030508	
KA2050A	1-3	HM+BorreT		080123	KA3551G05	1	Datascan	030508	
	1-3	DataTaker	080206		KA3552A01	1	Datascan	030508	
KA2162B	1-4	HM+BorreT		080123	KA3552G01	1-3	Datascan	030508	
	1-4	DataTaker	080206		KA3552H01	1	Datascan	030508	
KA2511A	1-6	Datascan	970701		KA3553B01	1	Datascan	030508	
	7-8	Datascan	990316		KA3554G01	1-5	Datascan	030508	
KA2563A	1-5	Datascan	961120		KA3554G02	1-5	Datascan	030508	
KA2598A	1	Datascan	990512		KA3557G	1-2	Datascan	030508	
KA2858A	2	Datascan	011024		KA3563A01	1	Datascan	011219	
KA2862A	1	Datascan	011024		KA3563D01	1	Datascan	011219	
KA3005A	2-5	Datascan	011024		KA3563G	1-4	Datascan	011219	
KA3010A	2	Datascan	011024		KA3563I01	1	Datascan	010921	
KA3065A02	1-4	DataTaker	080117		KA3566C01	1	Datascan	011114	
KA3065A03	1	DataTaker	080123		KA3566G01	1-5	Datascan	011217	
KA3067A	1-4	DataTaker	080117		KA3566G02	1-5	Datascan	011217	
KA3068A	1	DataTaker	080123		KA3568D01	1	Datascan	010926	
KA3105A	1-5	Datataker	061128		KA3572G01	1-2	Datascan	011217	
KA3110A	1-2	Datataker	061128		KA3573A	1-5	Datascan	011217	
KA3385A	1-2	Datascan	970701		KA3573C01	1	Datascan	011219	
KA3386A01	1	Datascan	030415		KA3574D01	1	Datascan	011219	

Borehole	Sect. no	Equipment	Date from	to	Borehole	Sect. no	Equipment	Date from	to
KA3574G01	1-3	Datascan	011217		KA3597D01	1	Datascan	010918	
KA3576G01	1-3	Datascan	010918		KA3597H01	1	Datascan	011015	
KA3578C01	1	Datascan	011106		KA3600F	1-4	Datascan	011015	
KA3578G01	1-2	Datascan	010918		KF0051A01	1-4	Datascan	980612	
KA3578H01	1	Datascan	011219		KF0069A01	1	Datascan	030417	
KA3579D01	1	Datascan	010920		KG0021A01	1-5	Datascan	010530	
KA3579G	1-3	Datascan	011217		KG0048A01	1-5	Datascan	010529	
KA3584G01	1-2	Datascan	010918		KI0023B	1-9	Datascan	980216	
KA3588C01	1	Datascan	011101		KI0025F	1-6	Datascan	970710	
KA3588D01	1	Datascan	011219		KI0025F02	1-10	Datascan	981027	
KA3588I01	1	Datascan	011101		KI0025F03	1-9	Datascan	991013	
KA3590G01	1-3	Datascan	011217		KXTT1	1-4	Datascan	011024	
KA3590G02	1-4	Datascan	011217		KXTT2	1-5	Datascan	011024	
KA3592C01	1	Datascan	011219		KXTT5	1-4	Datascan	011024	
KA3593G	1-4	Datascan	011015		SA3045A	1-3	DataTaker	080117	

* HM=Hydraulic Multiplexer

Note - Data not relevant for 2008 is to be found in earlier annual reports.

3.2 Groundwater level measurements in surface boreholes

3.2.1 Monitoring in surface boreholes

Normally, the level is scanned every 8th minute but stored only once every two hours unless the change since the latest stored value exceeds a pre-defined limit. The limit is usually set to 0.2 m.

In Table 3-3, lengths along the borehole to top and bottom of each section as well as elevation of the top of section are presented. If no end date is given, the borehole was equipped in the same way at the end of 2008. However, the period when some of the boreholes were open to enable re-instrumentation (summer 1991) is not included in the table.

Table 3-3. Monitored sections in surface boreholes.

Borehole	Section no	Section installed		Borehole from (m)	length to (m)	Elevation of section*	
		from	to			at top (masl)	at middle (masl)
HAS01	1	1988-08-01		0	100	6.38	-37.41
HAS02	1	1995-08-25		0	93	2.11	-36.87
HAS03	1	1997-02-05		0	100	2.36	-39.41
HAS05	1	1993-03-31		0	100	6.31	-36.70
HAS06	1	2003-09-23		0	100	4.80	-45.12
HAS07	1	1997-02-18		0	100	3.76	-41.45
HAS08	1	1997-01-30		0	125	6.62	-48.20
HAS09	1	1995-08-14		0	125	7.84	-47.69
HAS10	1	1995-08-14		0	125	6.35	-49.32
HAS11	1	2003-05-21		0	125	5.59	-56.81
HAS12	1	1995-08-15		0	125	2.88	-52.78
HAS13	1	2003-05-21		0	100	2.05	-42.01
HAS14	1	1995-08-14		0	100	1.67	-48.30
HAS15	1	2001-05-15		0	120	4.19	-47.77
HAS16	1	2003-09-23		0	120	4.36	-47.60
HAS17	1	2005-04-19		0	120	7.89	-44.07
HAS18	1	1997-02-27		0	150	7.54	-59.72
HAS19	1	2005-04-19		0	150	8.97	-55.65
HAS20	1	2003-07-03		0	150	6.24	-57.68
HAS21	1	1997-01-30		0	148	3.04	-60.98
HAV01	1	2000-09-17		0	175	9.27	-77.88

Borehole	Section no	Section installed from to	Borehole from (m)	length to (m)	Elevation of section* (masl)	
					at top	at middle
HAV03	1	2000-09-17	0	134	9.17	-57.78
HAV04	1	2000-09-17	0	100	7.97	-35.78
HAV08	1	1987-09-05	0	63	7.05	-20.77
HBH01	1	2003-09-17	0	50.6	4.71	-17.16
HBH02	1	2003-09-17	0	32.4	4.68	-7.35
HBH04	1	1991-04-04	31	90.4	-21.27	-46.69
	2	1991-04-04	0	30	5.52	-7.45
HLX03	1	2000-09-17	0	100	10.43	-35.07
HLX04	1	1997-01-29	0	125	10.33	-48.05
HLX05	1	1997-01-29	0	100	15.68	-28.54
KAS03	1	2005-07-04	0	1002	8.79	-488.49
KAS04	1	1993-06-04	0	480.98	11.66	-193.58
KAS07	1	1997-02-20	0	603.88	4.58	-253.44
KAS09	1	1990-04-09	261	450	-220.08	-301.03
	2	1990-04-09	241	260	-202.93	-211.08
	3	1990-04-09	151	240	-125.97	-163.99
	4	1990-04-09	116	150	-96.01	-110.58
	5	1990-04-09	0	115	4.08	-45.66
KAS10	1	1989-10-23	0	99.93	3.72	-39.55
KAS11	1	1995-10-23	0	248.9	4.22	-120.21
KAS14	1	1995-10-24	0	211.85	3.35	-87.81
KAS16	1	1992-10-20	466	548.46	-452.88	-492.38
	2	1992-10-20	390	465	-379.57	-415.81
	3	1992-10-20	121	389	-116.36	-248.21
	4	1992-10-20	0	120	3.66	-55.96
KBH02	3	1991-09-19	261	326	-109.42	-117.31
	4	1991-09-19	151	260	-79.60	-95.04
	5	1991-09-19	106	150	-61.29	-71.08
	6	1991-09-19	0	105	5.50	-29.95

Note - Data not relevant for 2008 is to be found in earlier annual reports.

* Measured in local system ÅSPÖ96. Elevation in RT90-RHB70 is obtained by adding 0.03 m.

Italics= This information is not found in the Sicada database

3.2.2 Absolute pressure in borehole sections

Sometimes it is of interest to determine the absolute pressure at the top of a packed off section. This value can be calculated if the vertical distance from top of section to the water level in the tube connecting the section with the ground surface and the density of water in the tube are known.

The altitude at top of section is presented in Table 3-3.

Density

The density of the tube water is determined in the following way. When all packers in a core borehole are installed and inflated, water is flushed from all sections to the ground surface through the tubes. When at least two tube volumes have been discharged, a water sample from each tube is collected. The electrical conductivity of the sample is measured. On approximately 75 samples from 1988 and 1989, the density was laboratory-determined. The electrical conductivity of the samples ranged from 60 to 3400 mS/m. From these measurements a first order equation is set up, by means of the least square method (by Ann-Chatrin Nilsson, KTH, 1990, personal communication), which gives the density from the electrical conductivity (see note in Table 3-4). This equation is then used to calculate the density of any sample. The deviation from the straight line for a single value is at most 1.5 kg/m³, but normally less than 0.5 kg/m³.

A more difficult problem is to determine whether the water sample is representative for the water in the tube or not. For example, water with a different density than the sample might have entered into a part of the tube when the flushing was interrupted. Taking also this into account, the maximum error in the density is estimated to be $\pm 10 \text{ kg/m}^3$, corresponding to $\pm 1 \text{ m}$ per 100 m water column.

Calculated density values in the tubes and measured electrical conductivity values are found in Table 3-4. Measurements of the electrical conductivity in water samples were performed only in the core boreholes on Äspö, in KBH02 and in KLX01, beginning in 1988.

The values may differ from undisturbed values in the section. For example, if the sample was taken immediately after inflation of the packers, the electrical conductivity in the section may not have reached its natural value.

It can be mentioned that the electrical conductivity of the sea water east of Ävrö in August and September 1986 was 1180 and 1170 mS/m, respectively.

Table 3-4. Electrical conductivity and calculated density (at 25° C) of water in tubes between section and the ground surface.

Borehole	Sec.	Valid from	Electrical conduct. (mS/m)	Density (kg/m ³)
KAS03	1	2006-10-03	193	998
	1	2007-09-27	275	999
KAS09	1	1990-04-07	1600	1005
	2	1990-04-07	1600	1005
	3	1990-04-07	1600	1005
	4	2007-10-05	925	1002
	4	2008-05-12	1010	1002
	5	1990-04-07	1600	1005
KAS16	1	1992-10-20	1450	1004
	2	1992-10-20	1350	1004
	3	1992-10-20	800	1001
	4	1992-10-20	750	1001
KBH02	3	1992-05-14	970	1002
	4	1992-05-14	1090	1002
	5	1992-05-14	870	1001
	6	1992-05-14	530	1000

Density (kg/m³) = 997.3 + 0.00467 × Electrical conductivity (mS/m).

Note - Data not relevant for 2008 is to be found in earlier annual reports.

3.2.3 Calibration method

To calibrate the registrations from the data loggers, manual levelling of all sections is made, normally once every month.

The logger data is converted to water levels by means of a linear calibration equation (if the pressure transducer is of the absolute type, subtracting the air pressure is also necessary). Converted logger data are compared with manual levellings that are corrected to account for borehole deviation. If the two differs, calibration constants are changed and the procedure is repeated until an acceptable fit is achieved.

3.3 Groundwater pressure in tunnel boreholes

3.3.1 Monitoring in tunnel boreholes

Normally, the level is scanned every 4th second but due to noisy signals it has been necessary to increase this value up to 30 minutes in some boreholes. However, data are stored only once every two hours unless the change since the latest stored value exceeds a pre-defined limit. The limit is usually set to 1 kPa, but due to noisy signals it has been necessary to increase this value to avoid sampling of too much data in some boreholes.

In Table 3-5 the length along the boreholes to top and bottom of each section and the elevation at the middle of section is presented. To enable calculations of absolute pressure at the middle of section, the level of the pressure transducer is also given.

Table 3-5. Monitored sections in tunnel boreholes.

Borehole	Section no	Section installed		Borehole length		Elevation of *		
		from	to	from (m)	to (m)	SecTop (masl)	SecMid (masl)	Transducer (masl)
HA1273A	1	1992-03-12		0.0	23.0	-174.23	-172.10	-163.34
HA1278A	1	1992-09-10		0.0	29.0	-175.68	-174.59	-163.34
HA1279A	1	1992-09-10		0.0	24.0	-175.65	-175.06	-163.34
HA1283B	1	1992-04-15		0.0	40.2	-176.55	-179.35	-163.34
HA1327B	1	1992-09-11		0.0	29.5	-182.81	-182.93	-163.34
HA1330B	1	1992-09-11		6.0	32.5	-183.04	-183.15	-163.34
HD0025A	1	1999-06-02		0.0	15.0	-416.70	-415.79	-416.44
KA1061A	1	1992-01-14		0.0	208.5	-144.93	-144.01	-163.34
KA1131B	1	1992-02-02		0.0	203.1	-155.30	-178.88	-163.34
KA1751A	1	2007-11-06		99.0	150.0	-246.10	-248.20	224.84
	2	2007-11-06		56.0	98.0	-242.50	-244.23	224.84
	3	2007-11-06		6.0	55.0	-238.10	-240.25	224.84
KA1754A	1	2007-11-06		75.0	159.87	-270.76	-289.21	224.84
	2	2007-11-06		6.0	74.0	-240.49	-255.48	224.84
KA1755A	1	2007-11-06		231.0	320.58	-318.23	-334.61	224.84
	2	2007-11-06		161.0	230.0	-293.11	-305.47	224.84
	3	2007-11-06		88.0	160.0	-267.53	-279.92	225.08
	4	2007-11-06		6.0	87.0	-239.83	-253.50	225.09
KA2048B	1	1994-12-12	2008-01-23	149.5	184.45	-302.36	-305.35	-289.19
	2	1994-12-12	2008-01-23	100.0	148.5	-293.69	-297.97	-289.19
	3	1994-12-12	2008-01-23	50.5	99.0	-284.73	-289.16	-289.19
	4	1994-12-12	2008-01-23	5.0	49.5	-276.35	-280.46	-289.19
	1	2008-02-06		149.5	184.45	-302.36	-305.35	-289.61
	2	2008-02-06		100.0	148.5	-293.69	-297.97	-289.61
	3	2008-02-06		50.5	99.0	-284.73	-289.16	-289.61
	4	2008-02-06		5.0	49.5	-276.35	-280.46	-289.90
KA2050A	1	1994-04-14	2008-01-23	155.0	211.57	-400.25	-422.84	-289.19
	2	1994-04-14	2008-01-23	102.0	154.0	-357.81	-378.65	-289.19
	3	1994-04-14	2008-01-23	6.0	101.0	-280.61	-318.81	-289.19
	1	2008-02-06		155.0	211.57	-400.25	-422.84	-289.90
	2	2008-02-06		102.0	154.0	-357.81	-378.65	-289.90
	3	2008-02-06		6.0	101.0	-280.61	-318.81	-289.90
KA2162B	1	1994-04-15	2008-01-23	201.5	288.1	-342.47	-353.24	-289.19
	2	1994-04-15	2008-01-23	143.0	200.5	-327.48	-334.87	-289.19
	3	1994-04-15	2008-01-23	80.5	142.0	-311.17	-319.19	-289.19
	4	1994-04-15	2008-01-23	40.0	79.5	-300.49	-305.70	-289.19
	1	2008-02-06		201.5	288.1	-342.47	-353.24	-289.61
	2	2008-02-06		143.0	200.5	-327.48	-334.87	-289.61
	3	2008-02-06		80.5	142.0	-311.17	-319.19	-289.61
	4	2008-02-06		40.0	79.5	-300.49	-305.70	-289.61

Borehole	Section no	Section installed		Borehole length		Elevation of *		
		from	to	from (m)	to (m)	SecTop (masl)	SecMid (masl)	Transducer (masl)
KA2511A	1	1999-03-16		239.0	293.0	-467.14	-481.94	-335.24
	2	1999-03-16		171.0	238.0	-429.93	-448.25	-335.24
	3	1999-03-16		139.0	170.0	-412.40	-420.90	-335.24
	4	1999-03-16		111.0	138.0	-397.01	-404.44	-335.24
	5	1999-03-16		103.0	110.0	-392.62	-394.54	-335.24
	6	1999-03-16		96.0	102.0	-388.77	-390.42	-335.24
	7	1999-03-16		65.0	95.0	-371.67	-379.95	-335.24
	8	1999-03-16		6.0	64.0	-339.17	-355.13	-335.49
KA2563A	1	1999-03-15		242.0	246.0	-501.36	-502.65	-335.48
	2	1999-03-15		236.0	241.0	-497.48	-499.10	-335.48
	3	1999-03-15		206.0	208.0	-478.00	-478.65	-335.48
	4	1999-03-15		187.0	190.0	-465.58	-466.56	-335.48
	5	1999-03-15		146.0	186.0	-438.64	-451.81	-335.48
KA2598A	1	1999-05-12		0.0	300.77	-342.39	-421.96	-334.78
KA2858A	2	1995-02-23		39.77	40.77	-382.34	-382.37	-398.96
KA2862A	1	2002-03-22		0.0	15.98	-379.54	-380.66	-398.96
KA3005A	2	1995-12-07		46.78	50.03	-403.52	-403.64	-399.64
	3	1995-12-07		44.78	45.78	-403.37	-403.41	-399.64
	4	1995-12-07		39.03	43.78	-402.94	-403.12	-399.64
	5	1995-12-07		6.53	38.03	-400.38	-401.64	-399.64
	2	1995-02-23		8.56	15.06	-400.58	-400.86	-399.64
KA3010A	2	1995-02-23		8.56	15.06	-400.58	-400.86	-399.64
KA3065A02	1	2000-09-05	2007-12-27	21.0	69.95	-410.06	-412.42	-407.89
	2	2000-09-05	2007-12-27	14.0	20.0	-409.46	-409.72	-407.89
	3	2000-09-05	2007-12-27	7.5	13.0	-408.90	-409.14	-407.89
	4	2000-09-05	2007-12-27	4.0	6.5	-408.59	-408.71	-407.89
	1	2008-01-17		21.0	69.95	-410.06	-412.42	-407.47
	2	2008-01-17		14.0	20.0	-409.46	-409.72	-407.47
	3	2008-01-17		7.5	13.0	-408.90	-409.14	-407.47
	4	2008-01-17		4.0	6.5	-408.59	-408.71	-407.47
KA3065A03	1	2007-05-04	2007-12-27	0.0	12.11	-408.09	-408.57	-408.19?
	1	2008-01-23		0.0	12.11	-408.09	-408.57	-407.50
KA3067A	1	1995-02-28	2007-12-27	34.55	40.05	-411.50	-411.74	-407.59
	2	1995-02-28	2007-12-27	30.55	33.55	-411.16	-411.29	-407.59
	3	1995-02-28	2007-12-27	28.05	29.55	-410.95	-411.01	-407.59
	4	1995-02-28	2007-12-27	6.55	27.05	-409.14	-410.00	-407.59
	1	2008-01-17		34.55	40.05	-411.50	-411.74	-407.16
	2	2008-01-17		30.55	33.55	-411.16	-411.29	-407.16
	3	2008-01-17		28.05	29.55	-410.95	-411.01	-407.16
	4	2008-01-17		6.55	27.05	-409.14	-410.00	-407.16
KA3068A	1	2001-11-22	2007-12-27	0.0	16.85	-408.38	-407.97	-407.59
	1	2008-01-23		0.0	16.85	-408.38	-407.97	-407.16
KA3105A	1	1995-03-01	2006-11-25	53.01	68.95	-418.09	-418.81	-413.14
	2	1995-03-01	2006-11-25	25.51	52.01	-415.78	-416.87	-413.14
	3	1995-03-01	2006-11-25	22.51	24.51	-415.54	-415.62	-413.14
	4	1995-03-01	2006-11-25	17.01	19.51	-415.09	-415.19	-413.14
	5	1995-03-01	2006-11-25	6.51	16.01	-414.21	-414.61	-413.14
	1	2006-11-28		53.01	68.95	-418.09	-418.81	-413.52
	2	2006-11-28		25.51	52.01	-415.78	-416.87	-413.52
	3	2006-11-28		22.51	24.51	-415.54	-415.62	-413.52
	4	2006-11-28		17.01	19.51	-415.09	-415.19	-413.52
KA3110A	5	2006-11-28		6.51	16.01	-414.21	-414.61	-413.52
	1	1995-02-23	2006-11-25	20.05	26.83	-415.61	-415.94	-413.14
	2	1995-02-23	2006-11-25	6.55	19.05	-414.32	-414.91	-413.14
	1	2006-11-28		20.05	26.83	-415.61	-415.94	-413.52
	2	2006-11-28		6.55	19.05	-414.32	-414.91	-413.52
KA3385A	1	1995-03-02		32.05	34.18	-448.30	-448.37	-445.93
	2	1995-03-02		7.05	31.05	-446.49	-447.36	-445.93
KA3386A01	1	2006-01-30		2.12	65.11	-446.18	-447.31	-446.08

Borehole	Section no	Section installed		Borehole length		Elevation of *		
		from	to	from (m)	to (m)	SecTop (masl)	SecMid (masl)	Transducer (masl)
KA3510A	1	2001-05-08	2007-03-21	125.0	150.06	-511.24	-517.48	-447.96
	2	2001-05-08	2007-03-21	110.0	124.0	-503.77	-507.26	-447.96
	3	2001-05-08	2007-03-21	75.0	109.0	-486.30	-494.79	-447.96
	4	2001-05-08	2007-03-21	51.0	74.0	-474.28	-480.04	-447.54
	5	2001-05-08	2007-03-21	4.5	50.0	-450.96	-462.38	-447.54
	1	2007-03-21		125.0	150.06	-511.24	-517.48	-447.66
	2	2007-03-21		110.0	124.0	-503.77	-507.26	-447.66
	3	2007-03-21		75.0	109.0	-486.30	-494.79	-447.66
	4	2007-03-21		51.0	74.0	-474.28	-480.04	-447.24
	5	2007-03-21		4.5	50.0	-450.96	-462.38	-447.24
KA3539G	1	2002-12-02		18.6	30.0	-467.53	-473.16	-446.92
	2	2002-12-02		15.85	17.6	-464.82	-465.68	-446.71
	3	2002-12-02		10.0	14.85	-459.05	-461.44	-446.50
	4	2002-12-02		4.0	9.0	-453.14	-455.60	-446.28
KA3542G01	1	2002-11-13		27.0	30.0	-468.15	-469.21	-446.92
	2	2002-11-13		21.3	26.0	-464.12	-465.78	-446.71
	3	2002-11-13		18.6	20.3	-462.22	-462.82	-446.50
	4	2002-11-13		10.5	17.6	-456.49	-459.00	-446.28
	5	2002-11-13		3.5	9.5	-451.55	-453.67	-446.07
KA3542G02	1	2002-11-20		28.2	30.01	-468.73	-469.36	-446.92
	2	2002-11-20		25.6	27.2	-466.92	-467.48	-446.71
	3	2002-11-20		21.5	24.6	-464.06	-465.14	-446.50
	4	2002-11-20		9.0	20.5	-455.35	-459.36	-446.28
	5	2002-11-20		2.8	8.0	-451.02	-452.84	-446.07
KA3543A01	1	2002-01-30		0.65	2.06	-446.81	-446.82	-445.42
KA3543I01	1	2002-01-30		0.65	2.06	-443.47	-442.81	-445.64
KA3544G01	1	2002-11-12		11.65	12.0	-460.60	-460.78	-446.07
	2	2002-11-12		8.9	10.65	-457.85	-458.73	-445.86
	3	2002-11-12		3.5	7.7	-452.45	-454.55	-445.64
KA3546G01	1	2002-11-07		9.3	12.0	-458.19	-459.54	-446.92
	2	2002-11-07		6.75	8.3	-455.64	-456.42	-446.71
	3	2002-11-07		1.5	5.75	-450.39	-452.52	-446.50
KA3548A01	1	2002-11-28		21.5	30.0	-447.74	-447.97	-446.91
	2	2002-11-28		11.75	20.5	-447.21	-447.45	-446.70
	3	2002-11-28		8.8	10.75	-447.05	-447.11	-446.49
	4	2002-11-28		3.0	7.8	-446.74	-446.87	-446.28
KA3548D01	1	2002-01-30		0.65	2.06	-445.83	-445.80	-445.42
KA3548G01	1	2002-01-29		6.0	12.0	-455.00	-458.00	-445.85
	2	2002-01-29		2.0	5.0	-451.00	-452.50	-445.54
KA3550G01	1	2002-11-06		8.3	12.03	-457.07	-458.93	-445.85
	2	2002-11-06		2.0	7.3	-450.77	-453.42	-445.64
	3	2002-11-06		1.8	4.2	-450.57	-451.77	-445.64
KA3550G05	1	2002-01-29		1.5	3.0	-450.46	-451.21	-446.06
KA3551G05	1	2002-01-29		1.5	3.1	-450.41	-451.21	-446.27
KA3552A01	1	2002-01-30		0.65	2.06	-446.65	-446.69	-445.64
KA3552G01	1	2003-04-27		7.05	12.01	-455.82	-458.30	-446.91
	2	2003-04-27		4.35	6.05	-453.12	-453.97	-446.70
	3	2003-04-27		1.5	3.35	-450.27	-451.20	-446.49
KA3552H01	1	2003-04-27		0.0	2.1	-443.98	-443.09	-445.64
KA3553B01	1	2002-01-30		0.65	2.02	-446.95	-447.37	-445.42
KA3554G01	1	2002-11-27		25.15	30.01	-466.63	-468.35	-446.92
	2	2002-11-27		22.6	24.15	-464.82	-465.37	-446.70
	3	2002-11-27		14.0	21.6	-458.74	-461.43	-446.48
	4	2002-11-27		5.0	13.0	-452.37	-455.20	-446.28
	5	2002-11-27		1.5	4.0	-449.90	-450.78	-446.06
KA3554G02	1	2002-11-25		22.0	30.01	-464.37	-467.21	-446.91
	2	2002-11-25		15.9	21.0	-460.06	-461.86	-446.70
	3	2002-11-25		13.2	14.9	-458.15	-458.75	-446.49
	4	2002-11-25		10.5	12.2	-456.24	-456.84	-446.28
	5	2002-11-25		1.5	9.5	-449.88	-452.71	-446.06
KA3557G	1	2002-01-29		15.0	30.04	-463.68	-471.12	-446.92
	2	2002-01-29		1.5	14.0	-450.33	-456.51	-446.70
KA3563A01	1	2001-04-02		0.65	2.06	-447.15	-447.24	-445.50
KA3563D01	1	2001-04-02		0.65	2.0	-446.13	-446.10	-445.49

Borehole	Section no	Section installed from to	Borehole length		Elevation of *		
			from (m)	to (m)	SecTop (masl)	SecMid (masl)	Transducer (masl)
KA3563G	1	2001-03-27	15.0	30.0	-463.46	-470.85	-445.93
	2	2001-03-27	10.0	13.0	-458.54	-460.02	-446.72
	3	2001-03-27	4.0	8.0	-452.63	-454.60	-445.93
	4	2001-03-27	1.5	3.0	-450.17	-450.91	-445.72
KA3563I01	1	2001-04-03	0.65	2.15	-443.02	-442.30	-445.71
KA3566C01	1	2001-04-02	0.65	2.1	-445.52	-445.48	-445.92
KA3566G01	1	2001-03-20	23.5	30.01	-465.14	-467.44	-446.99
	2	2001-03-20	20.0	21.5	-462.68	-463.20	-446.78
	3	2001-03-20	12.0	18.0	-457.03	-459.15	-446.57
	4	2001-03-20	7.3	10.0	-453.72	-454.67	-446.36
	5	2001-03-20	1.5	6.3	-449.62	-451.32	-446.14
KA3566G02	1	2001-03-20	19.0	30.01	-461.72	-465.53	-446.57
	2	2001-03-20	16.0	18.0	-459.64	-460.34	-446.35
	3	2001-03-20	12.0	14.0	-456.87	-457.57	-446.14
	4	2001-03-20	8.0	11.0	-454.11	-455.14	-445.93
	5	2001-03-20	1.5	6.0	-449.61	-451.16	-446.72
KA3568D01	1	2001-04-02	0.65	2.3	-445.86	-445.89	-445.49
KA3572G01	1	2001-03-21	7.3	12.0	-455.81	-458.16	-446.99
	2	2001-03-21	2.7	5.3	-451.21	-452.51	-446.78
KA3573A	1	2001-03-29	26.0	40.07	-447.03	-447.29	-446.35
	2	2001-03-29	21.0	24.0	-446.84	-446.90	-446.14
	3	2001-03-29	14.5	19.0	-446.60	-446.68	-445.93
	4	2001-03-29	10.5	12.5	-446.45	-446.49	-446.71
	5	2001-03-29	3.4	8.5	-446.19	-446.28	-445.50
KA3573C01	1	2001-04-02	0.65	2.05	-444.76	-444.36	-445.71
KA3574D01	1	2001-04-02	0.65	2.05	-444.98	-444.83	-445.92
KA3574G01	1	2001-03-07	8.0	12.0	-456.33	-458.33	-446.98
	2	2001-03-07	5.1	7.0	-453.43	-454.38	-446.78
	3	2001-03-07	1.8	4.1	-450.13	-451.28	-446.56
KA3576G01	1	2001-03-07	7.87	12.01	-456.14	-458.21	-446.55
	2	2001-03-07	3.87	5.87	-452.14	-453.14	-446.34
	3	2001-03-07	1.37	2.87	-449.64	-450.39	-446.13
KA3578C01	1	2001-04-03	0.65	2.09	-445.40	-445.47	-445.49
KA3578G01	1	2001-03-08	6.5	12.58	-454.88	-457.92	-446.98
	2	2001-03-08	4.3	5.5	-452.68	-453.28	-446.77
KA3578H01	1	2001-04-03	0.65	1.9	-442.82	-442.28	-445.70
KA3579D01	1	2001-04-03	0.65	2.0	-445.44	-445.45	-445.92
KA3579G	1	2001-03-08	14.7	22.65	-463.07	-467.04	-446.56
	2	2001-03-08	12.5	13.7	-460.87	-461.47	-446.34
	3	2001-03-08	2.5	11.5	-450.87	-455.37	-446.13
KA3584G01	1	2001-03-19	7.0	12.0	-455.25	-457.75	-446.98
	2	2001-03-19	1.4	5.0	-449.65	-451.45	-446.77
KA3588C01	1	2001-04-03	0.65	2.04	-445.49	-445.54	-445.49
KA3588D01	1	2001-04-03	0.65	1.9	-445.26	-445.28	-445.70
KA3588I01	1	2001-04-03	0.65	1.96	-442.75	-442.15	-445.92
KA3590G01	1	2001-02-28	16.0	30.06	-459.26	-464.18	-446.98
	2	2001-02-28	7.0	15.0	-452.96	-455.76	-446.77
	3	2001-02-28	1.5	6.0	-449.11	-450.69	-446.56
KA3590G02	1	2001-03-06	25.65	30.05	-465.84	-467.36	-446.98
	2	2001-03-06	15.35	23.65	-458.71	-461.58	-446.77
	3	2001-03-06	12.05	13.35	-456.42	-456.87	-446.55
	4	2001-03-06	1.65	10.05	-449.22	-452.13	-446.34
KA3592C01	1	2001-04-03	0.63	2.1	-445.20	-445.15	-445.49
KA3593G	1	2001-02-27	25.2	30.02	-472.88	-475.25	-446.98
	2	2001-02-27	23.5	24.2	-471.21	-471.55	-446.77
	3	2001-02-27	9.0	22.5	-456.93	-463.58	-446.55
	4	2001-02-27	3.0	7.0	-451.03	-452.99	-446.34
KA3597D01	1	2001-04-03	0.65	2.22	-445.06	-445.02	-445.70
KA3597H01	1	2001-04-03	0.65	2.06	-442.64	-442.07	-445.92
KA3600F	1	2001-03-28	43.0	50.1	-446.86	-446.96	-446.98
	2	2001-03-28	40.5	42.0	-446.79	-446.81	-446.76
	3	2001-03-28	20.0	39.5	-446.18	-446.47	-446.55
	4	2001-03-28	3.4	18.0	-445.69	-445.91	-446.34

Borehole	Section no	Section installed		Borehole length		Elevation of *		
		from	to	from (m)	to (m)	SecTop (masl)	SecMid (masl)	Transducer (masl)
KF0051A01	1	2006-04-19		10.55	11.7	-446.12	-445.84	-452.18
	2	2006-04-19		8.85	9.55	-446.97	-446.80	-452.18
	3	2006-04-19		6.26	7.85	-448.26	-447.87	-452.18
	4	2006-04-19		4.66	5.26	-449.06	-448.91	-452.18
KF0069A01	1	2002-05-21		0.0	70.09	-454.82	-455.97	-454.62
KG0021A01	1	2001-05-30		42.5	48.81	-432.25	-431.29	-447.00
	2	2001-05-30		37.0	41.5	-433.92	-433.24	-446.79
	3	2001-05-30		35.0	36.0	-434.53	-434.38	-446.58
	4	2001-05-30		19.0	34.0	-439.39	-437.11	-446.37
	5	2001-05-30		5.0	18.0	-443.64	-441.67	-446.16
KG0048A01	1	2001-05-29		49.0	54.69	-432.63	-431.95	-447.00
	2	2001-05-29		34.8	48.0	-436.07	-434.47	-446.79
	3	2001-05-29		32.8	33.8	-436.55	-436.43	-446.58
	4	2001-05-29		13.0	31.8	-441.34	-439.07	-446.36
	5	2001-05-29		5.0	12.0	-443.27	-442.43	-446.16
KI0023B	1	1998-02-12	2007-03-21	113.7	200.71	-488.30	-503.59	-448.21
	2	1998-02-12	2007-03-21	111.25	112.7	-487.43	-487.69	-447.96
	3	1998-02-12	2007-03-21	87.2	110.25	-478.84	-482.97	-447.96
	4	1998-02-12	2007-03-21	84.75	86.2	-477.96	-478.22	-447.96
	5	1998-02-12	2007-03-21	72.95	83.75	-473.73	-475.67	-447.96
	6	1998-02-12	2007-03-21	70.95	71.95	-473.01	-473.19	-447.96
	7	1998-02-12	2007-03-21	43.45	69.95	-463.15	-467.89	-447.96
	8	1998-02-12	2007-03-21	41.45	42.45	-462.43	-462.61	-447.96
	9	1998-02-12	2007-03-21	4.6	40.45	-449.32	-455.68	-447.96
	1	2007-03-21		113.7	200.71	-488.30	-503.59	-448.09
	2	2007-03-21		111.25	112.7	-487.43	-487.69	-447.83
	3	2007-03-21		87.2	110.25	-478.84	-482.97	-447.83
	4	2007-03-21		84.75	86.2	-477.96	-478.22	-447.83
	5	2007-03-21		72.95	83.75	-473.73	-475.67	-447.83
	6	2007-03-21		70.95	71.95	-473.01	-473.19	-447.83
	7	2007-03-21		43.45	69.95	-463.15	-467.89	-447.83
	8	2007-03-21		41.45	42.45	-462.43	-462.61	-447.83
9	2007-03-21		4.6	40.45	-449.32	-455.68	-447.83	
KI0025F	1	1999-07-29	2007-03-21	170.5	193.8	-502.58	-506.04	-448.21
	2	1999-07-29	2007-03-21	165.5	169.5	-501.08	-501.68	-448.21
	3	1999-07-29	2007-03-21	90.5	164.5	-478.18	-489.62	-448.21
	4	1999-07-29	2007-03-21	87.5	89.5	-477.24	-477.55	-448.21
	5	1999-07-29	2007-03-21	42.5	86.5	-462.70	-469.91	-448.21
	6	1999-07-29	2007-03-21	5.0	41.5	-449.95	-456.23	-448.21
	1	2007-03-21		170.5	193.8	-502.58	-506.04	-448.09
	2	2007-03-21		165.5	169.5	-501.08	-501.68	-448.09
	3	2007-03-21		90.5	164.5	-478.18	-489.62	-448.09
	4	2007-03-21		87.5	89.5	-477.24	-477.55	-448.09
	5	2007-03-21		42.5	86.5	-462.70	-469.91	-448.09
	6	2007-03-21		5.0	41.5	-449.95	-456.23	-448.09

Borehole	Section no	Section installed		Borehole length		Elevation of *		
		from	to	from (m)	to (m)	SecTop (masl)	SecMid (masl)	Transducer (masl)
KI0025F02	1	2003-08-22	2007-03-21	140.05	204.18	-506.37	-518.94	-447.35
	2	2003-08-22	2007-03-21	135.1	139.05	-504.41	-505.20	-447.35
	3	2003-08-22	2007-03-21	129.2	134.1	-502.07	-503.04	-447.35
	4	2003-08-22	2007-03-21	100.25	128.2	-490.40	-496.07	-447.35
	5	2003-08-22	2007-03-21	93.35	99.25	-487.58	-488.78	-447.35
	6	2003-08-22	2007-03-21	78.25	92.35	-481.36	-484.26	-447.35
	7	2003-08-22	2007-03-21	73.3	77.25	-479.31	-480.13	-447.35
	8	2003-08-22	2007-03-21	64.0	72.3	-475.45	-477.18	-447.35
	9	2003-08-22	2007-03-21	56.1	63.0	-472.17	-473.61	-447.35
	10	2003-08-22	2007-03-21	3.4	55.1	-450.00	-460.97	-447.35
	1	2007-03-21		140.05	204.18	-506.37	-518.94	-447.13
	2	2007-03-21		135.1	139.05	-504.41	-505.20	-447.13
	3	2007-03-21		129.2	134.1	-502.07	-503.04	-447.13
	4	2007-03-21		100.25	128.2	-490.40	-496.07	-447.13
	5	2007-03-21		93.35	99.25	-487.58	-488.78	-447.13
	6	2007-03-21		78.25	92.35	-481.36	-484.26	-447.13
	7	2007-03-21		73.3	77.25	-479.31	-480.13	-447.13
	8	2007-03-21		64.0	72.3	-475.45	-477.18	-447.13
	9	2007-03-21		56.1	63.0	-472.17	-473.61	-447.13
	10	2007-03-21		3.4	55.1	-450.00	-460.97	-447.13
KI0025F03	1	2003-07-02	2007-03-21	135.03	141.72	-513.20	-514.26	-447.96
	2	2003-07-02	2007-03-21	129.03	134.03	-511.06	-512.25	-447.96
	3	2003-07-02	2007-03-21	123.03	128.03	-508.20	-509.39	-447.96
	4	2003-07-02	2007-03-21	93.53	122.03	-494.02	-500.89	-447.96
	5	2003-07-02	2007-03-21	89.03	92.53	-491.84	-492.69	-447.96
	6	2003-07-02	2007-03-21	75.03	88.03	-485.04	-488.20	-447.96
	7	2003-07-02	2007-03-21	66.53	74.03	-480.89	-482.72	-447.96
	8	2003-07-02	2007-03-21	59.53	65.53	-477.46	-478.93	-447.96
	9	2003-07-02	2007-03-21	55.03	58.53	-475.26	-476.11	-447.96
	1	2007-03-21		135.03	141.72	-513.20	-514.26	-477.66
	2	2007-03-21		129.03	134.03	-511.06	-512.25	-477.66
	3	2007-03-21		123.03	128.03	-508.20	-509.39	-477.66
	4	2007-03-21		93.53	122.03	-494.02	-500.89	-477.66
	5	2007-03-21		89.03	92.53	-491.84	-492.69	-477.66
	6	2007-03-21		75.03	88.03	-485.04	-488.20	-477.66
	7	2007-03-21		66.53	74.03	-480.89	-482.72	-477.66
	8	2007-03-21		59.53	65.53	-477.46	-478.93	-477.66
	9	2007-03-21		55.03	58.53	-475.26	-476.11	-477.66
KXTT1	1	1995-12-07		17.0	28.76	-404.27	-408.48	-398.96
	2	1995-12-07		15.0	16.0	-402.84	-403.20	-398.96
	3	1995-12-07		7.5	11.5	-397.48	-398.91	-398.96
	4	1995-12-07		3.0	6.5	-394.26	-395.51	-398.96
KXTT2	1	1995-12-06		16.55	18.3	-404.01	-404.63	-398.96
	2	1995-12-06		14.55	15.55	-402.61	-402.96	-398.96
	3	1995-12-06		11.55	13.55	-400.51	-401.21	-398.96
	4	1995-12-06		7.55	10.55	-397.72	-398.77	-398.96
	5	1995-12-06		3.05	6.55	-394.56	-395.79	-398.96
KXTT5	1	1999-12-14		10.81	25.85	-393.09	-395.05	-399.64
	2	1999-12-14		9.61	9.81	-392.78	-392.81	-399.64
	3	1999-12-14		6.11	8.61	-391.88	-392.20	-399.64
	4	1999-12-14		3.11	5.11	-391.10	-391.36	-399.64
SA3045A	1	2001-01-16	2008-01-16	9.0	20.7	-407.05	-408.12	-407.59
	2	2001-01-16	2008-01-16	6.0	8.0	-406.51	-406.69	-407.59
	3	2001-01-16	2008-01-16	2.5	5.0	-405.87	-406.10	-407.59
	1	2008-01-16		9.0	20.7	-407.05	-408.12	-407.16
	2	2008-01-16		6.0	8.0	-406.51	-406.69	-407.16
	3	2008-01-16		2.5	5.0	-405.87	-406.10	-407.16

Note - Data not relevant for 2008 is to be found in earlier annual reports.

* Measured in local system ÄSPÖ96. Elevation in RT90-RHB70 is obtained by adding 0.03 m.

3.4 Water flow in tunnel

3.4.1 Instrumentation

For a detailed description of instrumentation, see "Manual för HMS (del 3:4), 1994" (SKB internal controlling document).

The tunnel sections, given as metres from the tunnel entrance, draining water to the various measurement ditches are listed in Table 3-6. The tunnel drainage system is illustrated in Figure 3-1. Normally, the gauging box is placed some 10 metres downward from the measurement ditch crossing the tunnel. Special arrangements are used to collect the water from the side tunnels containing the elevator and the ventilation shafts.

Table 3-6. Water flow measurements in tunnel segments.

Gauging box	Upper section (m)	Lower section (m)
MA0682G	0	682
MA1033G	682	1033
MA1232G	1033	1232
MA1372G	1232	1372
MA1584G	1372	1584
MA1659G	Water from the elevator shaft (TH: 0-213 m), from the ventilation shaft for incoming air (TV: 0-213 m) and from a sump inside the gate in the side tunnel at 1659 m.	
MA1745G	1584	1745
	Water from the side tunnel collected at MA1659G is not included.	
MA1883G	1745	1883
MA2028G	1883	2028
MA2178G	2028	2178
MA2357G	2178	2357
MA2496G	2357	2496
MA2587G	Water from the elevator shaft (TH: 220-333 m) and from a sump inside the gate in the side tunnel at 2587 m.	
MA2699G	2496	2699
	Water from the side tunnel collected at MA2587G is not included.	
MA2840G	2699	2840
MA2994G	2840	2994
MA3179G	2994	3179
MA3384G	Water from the elevator shaft (TH: 340-450 m), from the ventilation shaft for incoming air (TV: 220-450 m) and from the ventilation shaft for outgoing air (TW: 0-450 m)	
MA3411G	3179	3426
	Water from the side tunnel collected at MA3384G is not included.	
MA3426G	3426	3600
	Water from tunnel I and parts of tunnel J is included	
MA3515G	3515	3525
MA3525G	3525	3535
MA3535G	3535	3600
MF0061G	Water from tunnel F 0-61 m and parts of tunnel J	
MG0004G	Water from tunnel G	

Note – The water from MA3515G, MA3525G and MA3535G is collected in MA3426G.

HMS - WATER FLOW IN TUNNEL

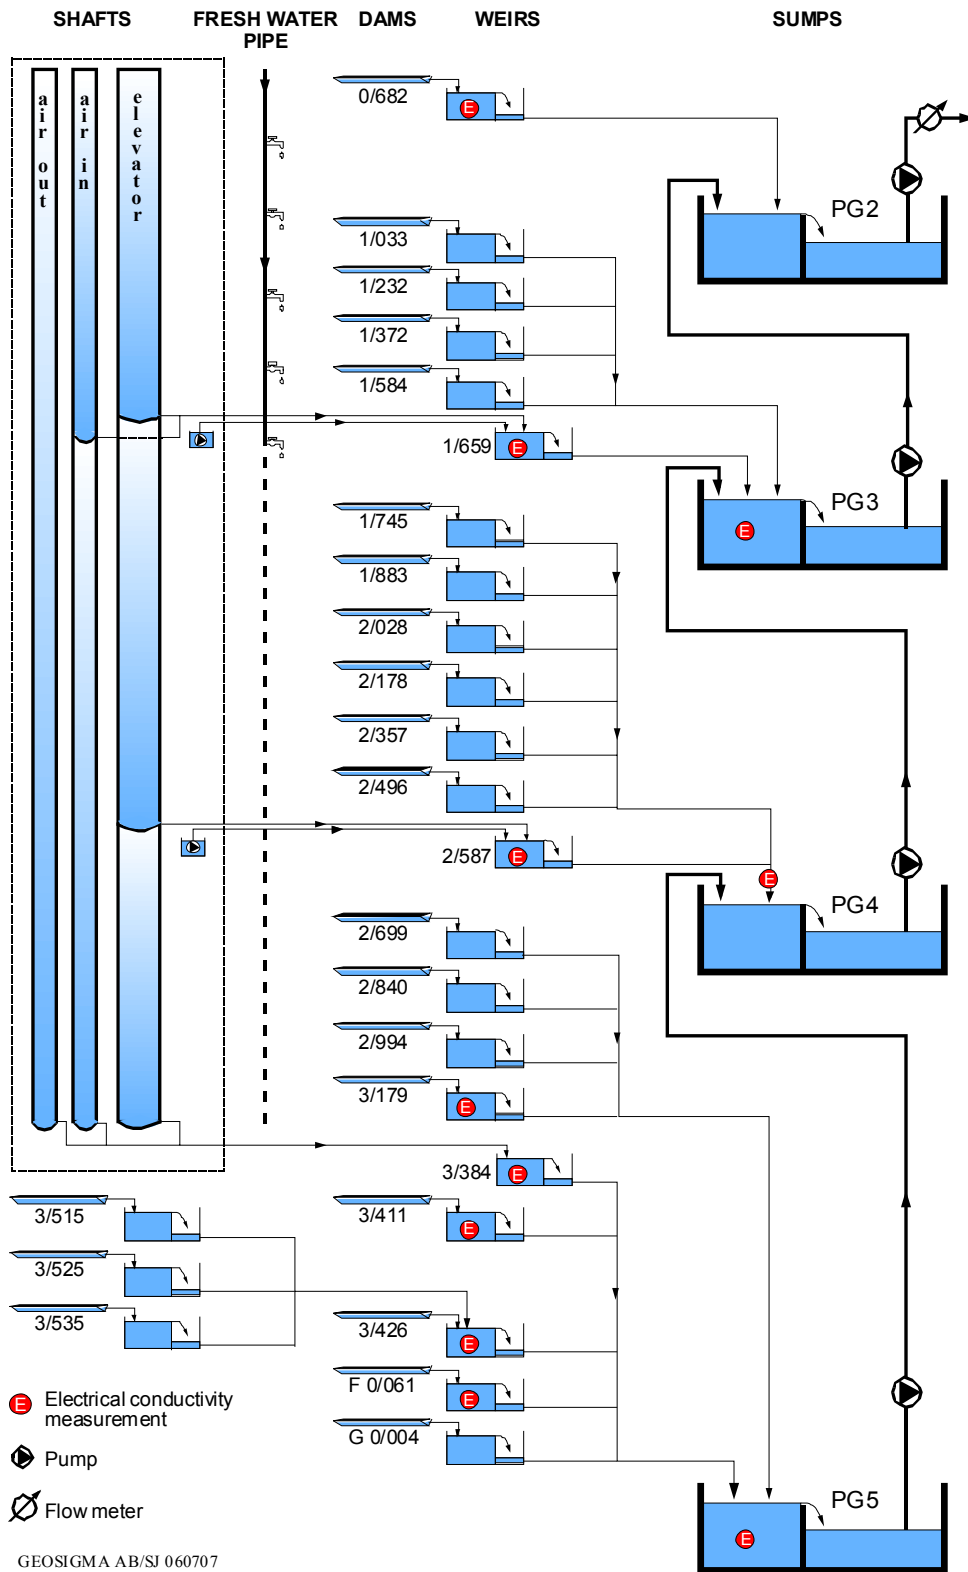


Figure 3-1. Schematic picture showing the tunnel drainage system.

3.4.2 Methods

Water levels in the gauging boxes are used in the HMS to calculate flow rates by means of a discharge equation expressing flow rate as a function of the water level. Normally, the level is scanned every 10th second but stored only once every hour unless the change since the latest stored value exceeds a pre-defined limit. The limit is usually set to 1 mm, but due to oscillating levels in some gauging boxes it has been necessary to increase this value to avoid sampling of too much data.

Initially, the discharge equation for a weir is determined. The flow rate is measured at four different levels on a ruler. The level indicator is then calibrated against the ruler by altering the level in the box. This two-step procedure is used to avoid a new determination of the discharge equation every time a level indicator has to be replaced and to make the discharge equation independent of changes in the calibration of the transducers.

The levels in the gauging boxes are manually read once every month to enable adjustments of the calibration constants for the level indicators. The discharge equations were checked using field measurements 2005.

3.4.3 Accuracy

If the flow rate does not differ too much from the flow interval for which the measurement points were selected to determine the calibration equation, the error is within approximately five percent.

However, maintenance of the v-notch weir is important. If there are obstacles or coatings on the weir, the relation between level and flow rate is disturbed.

3.5 Water flow in tunnel pipes

For a detailed description on instrumentation, see "Manual för HMS (del 3:4), 1994" (SKB internal controlling document).

The flow in the pipe for pumped-out drainage water is measured with an acoustic "clamp-on" type flow meter. The sensor is situated approximately 700 m from the tunnel entrance. Until 1999-06-26, the flow of incoming consumption water was measured in the same way, but after a failure in the flow meter a decision was taken to not continue these measurements.

3.5.1 Methods

The calibration constants given by the manufacturer do not provide the required accuracy. It is necessary to use material constants for different pipes and the errors caused by using the wrong constants are unknown. The pipes consist of different material layers, and might be coated on the inside. Therefore, due to these uncertainties, the flow meter is calibrated by measuring level changes in the uppermost pumping sump. (There are five sumps in the tunnel and the drainage water is pumped upwards from sump to sump until it is pumped out of the tunnel).

The flow is measured at a location some 10 metres above the top sump. The pump in each sump is working at maximum capacity until the sump is emptied and starts again when the sump is filled to a certain level. This means that the flow rate is either zero or at the maximum capacity of the pump. The flow meter was calibrated 2005 by measuring level changes per time in the sump. By knowing the water surface area in the sump at different levels one can calculate the discharged water.

The flow meter measurements are very frequent, every five seconds for discharged water, but the values are stored every 30 minutes unless a certain change has taken place.

3.6 Electrical conductivity of tunnel water

For a detailed description of instrumentation, see "Manual för HMS (del 3:4), 1994" (SKB internal controlling document).

Electrical conductivity is measured with a four-electrode conductivity meter, consisting of a housing with an electronic unit and an integrated sensor. The manufacturer gives an inaccuracy of maximum 0.5 % of the measured value plus 0.5 % of the measurement range. This gives a maximum error of 20 mS/m for most of the sensors.

The meter is mounted either in a gauging box for flow measurements, on the common discharge pipe leading water from the gauging boxes to the pumping sumps, or in a sump.

In Table 3-7, the tunnel parts from which water originates at the different measurement points are listed. Length to section is given in metres from the tunnel entrance.

Table 3-7. Electrical conductivity of water in tunnel segments.

Measurement point	Upper section (m)	Lower section (m)
EA0682G	0	682
EA1584T	682	1584
EA1659B	Water from the gauging box MA1659G is included (see below). Water from the elevator shaft (TH: 0-213 m), from the ventilation shaft for incoming air (TV: 0-220 m) and from a sump inside the gate in the side tunnel at 1659 m.	
EA2496T	1584	2496
EA2587G	Water from the gauging box MA1659G (see above) is excluded and water from the gauging box MA2587G is included (see below). Water from the elevator shaft (TH: 220-333 m) and from a sump inside the gate in the side tunnel at 2587 m.	
EA3179G	2994	3179
EA3384G	Water from the elevator shaft (TH: 340-450 m), from the ventilation shaft for incoming air (TV: 220-450 m) and from the ventilation shaft for outgoing air (TW: 0-450 m).	
EA3411G	3179	3426
EA3426G	Water from the gauging box MA3384G is excluded (see above). 3426	
EF0061G	Water from tunnel I and parts of tunnel J is included.	
EPG5	Water from tunnel F 0-61 m and parts of tunnel J. Water below section 2496 m, excluding the water from the gauging box MA2587G, including the water from the gauging box MA3384G (see above).	

3.6.1 Methods

A value is measured and stored once every two hours in the HMS. The four gauging boxes MA3384G, MA3411G, MA3426G and MF0061G are all situated near the sump PG5 in the bottom part of the tunnel, and a single electrical conductivity meter is used periodically in the different boxes and the sump.

The conductivity meters were calibrated 2005 by measuring three buffer fluids having well-defined electrical conductivity.

3.6.2 Accuracy

No careful error calculations have been carried out, but from the annual calibrations the uncertainty can be estimated to be approximately $\pm 5\%$ of measured values. This includes all types of errors, for example coatings on the sensor, drift in calibration constants, error in the electrical conductivity of the buffer solutions, etc.

3.7 Temperature, humidity and pressure of tunnel air

3.7.1 Instrumentation

Places in the tunnel where air temperature, air humidity and air pressure are measured are listed in Table 3-8.

Table 3-8. Monitored temperature, relative humidity and pressure of tunnel air.

Tunnel	Position	Parameters	Measured from	to
A	1198A	Temp & RH	2007-03-30	
A	1354B	Temp & RH	2007-03-30	
A	1624A	Temp & RH	2007-11-08	
A	2513A	Temp & RH	2006-11-10	
A	2714A	Temp & RH	2006-11-10	
A	3134A	Temp & RH	2006-11-28	
A	3134A	Air pressure	2007-03-30	
D	0042A	Temp & RH	2006-11-29	
E	0008A	Temp & RH	2006-11-10	
F	0070B	Temp & RH	2006-11-10	
G	0047A	Temp & RH	2006-11-10	
J	0015A	Temp & RH	2006-11-10	
J	0049A	Temp & RH	2006-11-10	
Q	0054B	Temp & RH	2006-11-10	
Incoming air	TV (above ground)	Temp & RH	2007-12-06	
Incoming air	TV (above ground)	Air pressure	2007-12-06	
Outgoing air	TW (above ground)	Temp & RH	2007-12-06	
Outgoing air	TW (above ground)	Air pressure	2007-12-06	

3.8 Meteorological data

From 2006 the station used to collect meteorological data is a SKB station, Norra Äspö, situated at the northern part of Äspö. Data are quality checked by SMHI.

1987-2005 the meteorological data were collected from different SMHI stations. The stations used were Oskarshamn, Gladhammar, Ölands norra udde and Målilla.

3.8.1 Precipitation

All types of errors cause precipitation to be underestimated. All precipitation values in this report are measured values, without any corrections.

3.8.2 Temperature

The areal representativity for temperature is normally quite good. Therefore, the Oskarshamn measurements some 25 km away can be regarded as good estimates of the temperature at Äspö, especially since both sites are near-coastal and at nearly the same altitude.

3.8.3 Potential Evapotranspiration

Although actual evapotranspiration can show a rather large areal variation on the local scale, the potential evapotranspiration, depending mainly upon meteorological factors, does not vary that much. For long periods the actual evapotranspiration is almost the same as the potential, but during the summer months it does not reach the potential rate. The difference between the two very much depends on vegetation, ground conditions and the wetness situation.

4 Summary of activities influencing groundwater levels, pressure and flow

4.1 General

One main purpose of this report is to give an overview of the long-term effects of the tunnel excavations on the groundwater situation in the area. Therefore, activities that might influence the groundwater pressure, groundwater levels and groundwater inflow to the tunnel are presented. The character and magnitude of the disturbances depend on the type of activity. Some activities might influence the groundwater pressure/level in many surrounding boreholes while other have influence only in the borehole where the activity takes place.

During the spring of 1991, the tunnel excavation began to have a visible effect on the groundwater level in many surface boreholes, especially on Äspö and Bockholmen. Later on most boreholes, except those on Laxemar, were influenced by the tunnel activities. From late 1991, the disturbances from the tunnel had a dominating influence on the groundwater levels in the area. One particular activity affecting the groundwater levels in many boreholes on Äspö was the drilling of the first of two raise-drilled ventilation shafts to the tunnel at the end of October 1992. After this event, the groundwater levels continued to decline in many borehole sections, but nothing as spectacular as in the late 1992 has occurred. Since 1996, the levels in most surface boreholes seem to have stabilised and the changes during 2008 were relatively small, within some metre in most boreholes. In the tunnel, the pressure in many of the borehole sections decreased by about 5 - 100 kPa (0.5-10 m) during 2008, but there were also a large number of sections, mainly in the deeper part of the tunnel, with increasing pressure during the year.

A large number of activities, which may or may not have influenced the groundwater level/pressure and inflow to the tunnel, have been carried out during 2008. Over 5600 entries during 2008 can be found in the activity table in the SKB database SICADA. One should also expect that there are activities influencing groundwater conditions that are missing in the database. Because of the great number of activities in the database, only a selection of activities is presented in the following tables.

The activities, obtained from the SKB database SICADA, are listed in Tables 4-1 to 4-6. The dates stated in the tables are the dates for the actual activity. However, the influence on groundwater levels/pressures may last 5-10 times the length of the activity.

4.2 Tunnel excavation and permanent reinforcement

These activities, presented in Table 4-1, may have a substantial influence on groundwater levels and pressures.

Table 4-1. Tunnel excavation and permanent reinforcements.

Start	Stop	Idcode	Secup (m)	Seclow (m)	Activity
2006-10-15	2008-03-13	TASA	1760.00	1780.00	Bolting
2006-10-15	2008-03-17	TASA	2200.00	2220.00	Bolting
2007-03-06	2008-03-12	TASD	0.00	20.00	Bolting
2007-03-06	2008-03-12	TASA	3160.00	3180.00	Bolting
2007-03-10	2008-03-12	TASA	2460.00	2480.00	Bolting
2007-03-10	2008-03-12	TASA	3080.00	3100.00	Bolting
2007-03-10	2008-03-13	NASA1757A			Bolting
2007-03-17	2008-03-17	TASA	660.00	680.00	Bolting
2007-03-17	2008-03-17	TASA	720.00	740.00	Bolting
2007-03-17	2008-03-17	TASA	1400.00	1420.00	Bolting
2007-03-17	2008-03-17	TASA	1520.00	1540.00	Bolting
2007-03-21	2008-03-19	TASA	360.00	380.00	Bolting
2007-10-09	2008-03-26	TASA	0.00	20.00	Bolting
2007-10-09	2008-03-26	TASA	20.00	40.00	Bolting
2007-10-09	2008-03-26	TASA	40.00	60.00	Bolting
2007-10-10	2008-03-19	TASA	160.00	180.00	Bolting
2007-10-10	2008-03-19	TASA	180.00	200.00	Bolting
2007-10-10	2008-03-26	TASA	60.00	80.00	Bolting
2007-10-10	2008-03-26	TASA	100.00	120.00	Bolting
2007-10-10	2008-03-26	TASA	120.00	140.00	Bolting
2007-10-11	2008-03-19	TASA	220.00	240.00	Bolting
2007-10-11	2008-03-19	TASA	240.00	260.00	Bolting
2007-10-16	2008-03-12	TASL	0.00	5.00	Bolting
2008-02-06	2008-02-06	TASS	8.47	12.76	Round Drilling
2008-02-11	2008-02-11	TASS	8.47	12.76	Charging
2008-02-11	2008-02-11	TASS	8.47	12.76	Round
2008-02-11	2008-02-11	TASS			Ventilation
2008-02-11	2008-02-11	TASS	8.47	12.76	Charging
2008-02-11	2008-02-11	TASS	8.47	12.76	Round
2008-02-11	2008-02-11	TASS			Ventilation
2008-02-11	2008-02-11	TASS	8.47	12.76	Charging
2008-02-11	2008-02-11	TASS	8.47	12.76	Round
2008-02-11	2008-02-11	TASS			Ventilation
2008-02-11	2008-02-11	TASS	8.47	12.76	Charging
2008-02-11	2008-02-11	TASS	8.47	12.76	Round
2008-02-11	2008-02-11	TASS			Ventilation
2008-02-11	2008-02-12	TASS			Mucking
2008-02-12	2008-02-12	TASS			Scaling, cleaning
2008-02-12	2008-02-12	TASS	8.47	12.76	Charging
2008-02-12	2008-02-12	TASS	8.47	12.76	Round
2008-02-12	2008-02-12	TASS			Ventilation
2008-02-12	2008-02-12	TASS			Mucking
2008-02-12	2008-02-12	TASS	12.76	16.88	Round Drilling
2008-02-13	2008-02-13	TASS	12.76	16.88	Charging
2008-02-13	2008-02-13	TASS	12.76	16.88	Round
2008-02-13	2008-02-13	TASS			Ventilation
2008-02-13	2008-02-13	TASS			Mucking
2008-02-13	2008-02-13	TASS	12.76	16.88	Charging
2008-02-13	2008-02-13	TASS	12.76	16.88	Round
2008-02-13	2008-02-13	TASS			Ventilation
2008-02-13	2008-02-13	TASS	12.76	16.88	Charging
2008-02-13	2008-02-13	TASS	12.76	16.88	Round
2008-02-13	2008-02-13	TASS			Ventilation
2008-02-13	2008-02-13	TASS			Mucking
2008-02-13	2008-02-13	TASS	12.76	16.88	Charging
2008-02-13	2008-02-13	TASS	12.76	16.88	Round
2008-02-13	2008-02-13	TASS			Ventilation
2008-02-13	2008-02-13	TASS			Mucking
2008-02-14	2008-02-14	TASS			Scaling, cleaning
2008-02-18	2008-02-18	TASS	16.88	20.74	Round Drilling
2008-02-19	2008-02-19	TASS	16.88	20.74	Charging

2008-02-19	2008-02-19	TASS	16.88	20.74	Round
2008-02-19	2008-02-19	TASS			Mucking
2008-02-19	2008-02-19	TASS			Ventilation
2008-02-19	2008-02-19	TASS	16.88	20.74	Charging
2008-02-19	2008-02-19	TASS	16.88	20.74	Round
2008-02-19	2008-02-19	TASS			Mucking
2008-02-19	2008-02-19	TASS			Ventilation
2008-02-19	2008-02-19	TASS	16.88	20.74	Charging
2008-02-19	2008-02-19	TASS	16.88	20.74	Round
2008-02-19	2008-02-19	TASS			Ventilation
2008-02-19	2008-02-19	TASS			Mucking
2008-02-19	2008-02-19	TASS	16.88	20.74	Charging
2008-02-19	2008-02-19	TASS	16.88	20.74	Round
2008-02-19	2008-02-19	TASS			Ventilation
2008-02-19	2008-02-19	TASS			Mucking
2008-02-20	2008-02-20	TASS			Scaling, cleaning
2008-02-28	2008-03-19	TASA	260.00	280.00	Bolting
2008-02-28	2008-03-19	TASA	340.00	360.00	Bolting
2008-02-28	2008-03-19	TASA	420.00	440.00	Bolting
2008-03-03	2008-03-03	SS0004A09			Bolting
2008-03-03	2008-03-03	SS0004A13			Bolting
2008-03-03	2008-03-03	SS0004A15			Bolting
2008-03-03	2008-03-03	SS0008A16			Bolting
2008-03-03	2008-03-03	SS0008A24			Bolting
2008-03-03	2008-03-03	SS0008C01			Bolting
2008-03-03	2008-03-18	TASA	460.00	480.00	Bolting
2008-03-03	2008-03-18	TASA	560.00	580.00	Bolting
2008-03-03	2008-03-18	TASA	580.00	600.00	Bolting
2008-03-03	2008-03-19	TASA	440.00	460.00	Bolting
2008-03-04	2008-03-18	TASA	480.00	500.00	Bolting
2008-03-05	2008-03-18	TASA	500.00	520.00	Bolting
2008-03-05	2008-03-18	TASA	520.00	540.00	Bolting
2008-03-05	2008-03-18	TASA	540.00	560.00	Bolting
2008-03-05	2008-03-18	TASA	620.00	640.00	Bolting
2008-03-05	2008-03-18	TASA	640.00	660.00	Bolting
2008-04-15	2008-04-15	TASS	20.74	24.88	Round Drilling
2008-04-16	2008-04-16	TASS	20.74	24.88	Round Drilling
2008-04-16	2008-04-16	TASS	20.74	24.88	Charging
2008-04-16	2008-04-16	TASS	20.74	24.88	Round
2008-04-16	2008-04-16	TASS			Charging
2008-04-16	2008-04-16	TASS			Ventilation
2008-04-16	2008-04-16	TASS	20.74	24.88	Round
2008-04-16	2008-04-16	TASS			Ventilation
2008-04-17	2008-04-17	TASS			Mucking
2008-04-17	2008-04-17	TASS			Scaling, cleaning
2008-04-17	2008-04-17	TASS	24.88	28.94	Round Drilling
2008-04-21	2008-04-21	TASS	24.88	28.94	Charging
2008-04-21	2008-04-21	TASS	24.88	28.94	Round
2008-04-21	2008-04-21	TASS			Ventilation
2008-04-21	2008-04-22	TASS			Mucking
2008-04-22	2008-04-22	TASS	24.88	28.94	Charging
2008-04-22	2008-04-22	TASS	24.88	28.94	Round
2008-04-22	2008-04-22	TASS			Ventilation
2008-04-22	2008-04-22	TASS			Mucking
2008-04-22	2008-04-22	TASS			Scaling, cleaning
2008-04-22	2008-04-22	TASS	28.94	32.94	Round Drilling
2008-04-23	2008-04-23	TASS	28.94	32.94	Round Drilling
2008-04-24	2008-04-24	TASS	28.94	32.94	Charging
2008-04-24	2008-04-24	TASS	28.94	32.94	Round
2008-04-24	2008-04-24	TASS			Ventilation
2008-04-24	2008-04-24	TASS			Mucking
2008-04-24	2008-04-24	TASS	28.94	32.94	Charging
2008-04-24	2008-04-24	TASS	28.94	32.94	Round
2008-04-24	2008-04-24	TASS			Ventilation
2008-04-24	2008-04-24	TASS			Mucking
2008-04-24	2008-04-24	TASS			Scaling, cleaning
2008-04-24	2008-04-25	TASS			Mucking

2008-06-03	2008-06-03	TASS	32.94	37.50	Round Drilling
2008-06-04	2008-06-04	TASS	32.94	37.50	Charging
2008-06-04	2008-06-04	TASS	32.94	37.50	Round
2008-06-04	2008-06-04	TASS			Ventilation
2008-06-04	2008-06-05	TASS			Mucking
2008-06-05	2008-06-05	TASS	32.94	37.50	Charging
2008-06-05	2008-06-05	TASS	32.94	37.50	Round
2008-06-05	2008-06-05	TASS			Mucking
2008-06-05	2008-06-05	TASS			Ventilation
2008-06-05	2008-06-05	TASS	37.50	42.14	Round Drilling
2008-06-10	2008-06-10	TASS	37.50	42.14	Charging
2008-06-10	2008-06-10	TASS	37.50	42.14	Round
2008-06-10	2008-06-10	TASS			Ventilation
2008-06-10	2008-06-11	TASS			Mucking
2008-06-11	2008-06-11	TASS			Scaling, cleaning
2008-06-11	2008-06-11	TASS	42.14	45.72	Round Drilling
2008-06-12	2008-06-12	TASS	42.14	45.72	Charging
2008-06-12	2008-06-12	TASS	42.14	45.72	Round
2008-06-12	2008-06-12	TASS			Ventilation
2008-06-12	2008-06-12	TASS			Mucking
2008-06-12	2008-06-12	TASS			Scaling, cleaning
2008-06-16	2008-06-16	TASS	45.72	48.67	Round Drilling
2008-06-17	2008-06-17	TASS	45.72	48.67	Charging
2008-06-17	2008-06-17	TASS	45.72	48.67	Round
2008-06-17	2008-06-17	TASS			Ventilation
2008-06-17	2008-06-18	TASS			Mucking
2008-06-18	2008-06-18	TASS			Scaling, cleaning
2008-09-16	2008-09-16	TASS	48.17	52.72	Round Drilling
2008-09-22	2008-09-22	TASS	48.17	52.72	Charging
2008-09-22	2008-09-22	TASS			Ventilation
2008-09-22	2008-09-22	TASS	48.17	52.72	Round
2008-09-22	2008-09-23	TASS			Mucking
2008-09-23	2008-09-23	TASS	52.72	56.77	Round Drilling
2008-09-24	2008-09-24	TASS	52.72	56.77	Charging
2008-09-24	2008-09-24	TASS	52.72	56.77	Round
2008-09-24	2008-09-24	TASS			Ventilation
2008-09-24	2008-09-25	TASS			Mucking
2008-09-25	2008-09-25	TASS	56.77	60.55	Round Drilling
2008-09-29	2008-09-29	TASS	56.77	60.55	Charging
2008-09-29	2008-09-29	TASS	56.77	60.55	Round
2008-09-29	2008-09-29	TASS			Ventilation
2008-09-29	2008-09-30	TASS			Mucking
2008-09-30	2008-09-30	TASS	56.77	60.55	Charging
2008-09-30	2008-09-30	TASS			Ventilation
2008-09-30	2008-09-30	TASS	56.77	60.55	Round
2008-09-30	2008-09-30	TASS	56.77	60.55	Round Drilling
2008-10-01	2008-10-01	TASS	60.55	64.56	Charging
2008-10-01	2008-10-01	TASS	60.55	64.56	Round
2008-10-01	2008-10-01	TASS			Ventilation
2008-10-02	2008-10-02	TASS	60.55	64.56	Charging
2008-10-02	2008-10-02	TASS	60.55	64.56	Round
2008-10-02	2008-10-02	TASS			Ventilation

4.3 Opening of valves in tunnel boreholes

The main reason for valve openings in boreholes is water sampling for chemical analyses. Usually, before water samples are taken from a tunnel borehole section, a certain amount of water is discharged to assure that the water is representative for that section. Typically, for chemical sampling, a volume corresponding to five section volumes is discharged. When a valve is opened, the flow rate may vary a lot from section to section due to varying transmissivities and pressures. Normally, this type of valve openings has only a minor influence on other boreholes. Therefore, only openings and closures in borehole sections included in the monitoring program are listed in

Table 4-2, in which dates when valves have been open are listed. In some cases, due to missing data records, only start or stop date is listed. Since the opening and closing of a valve are un-coupled activities in the database it is also possible, if two successive data records are missing, that the "from" and "to" dates do not match.

Table 4-2. Open valves in tunnel boreholes.

From	To	Borehole:sec	From	To	Borehole:sec
2008-04-16	2008-04-17	KA2862A:	2008-09-23	2008-09-23	KA2162B:
2008-05-21	2008-05-22	KA3573A:2	2008-09-29	2008-09-30	KA1755A:
2008-05-21		KA3600F:1	2008-09-29	2008-09-29	KA2862A:
2008-05-22	2008-05-22	KA3600F:2	2008-09-29	2008-09-29	KA3385A:1
2008-05-28	2008-05-28	HD0025A:1	2008-10-06	2008-10-08	KA1061A:
2008-05-28	2008-05-28	KA2862A:1	2008-10-20	2008-10-20	KA3539G:2
2008-05-28	2008-05-28	KA3110A:1	2008-10-20	2008-10-20	KA3542G01:3
2008-07-02	2008-07-02	KA3110A:2	2008-10-20	2008-10-20	KA3554G01:2
2008-07-02	2008-07-02	KA3510A:1	2008-10-21	2008-10-21	KA3110A:
	2008-07-23	KA3110A:2	2008-10-21	2008-10-21	KA3539G:2
	2008-07-23	KA3510A:1	2008-10-21	2008-10-21	KA3542G01:3
2008-08-22	2008-09-17	KG0021A01:3	2008-10-21	2008-10-21	KA3542G02:4
2008-08-23		KA3110A:2	2008-10-21	2008-10-21	KA3548A01:3
2008-08-23		KA3510A:1	2008-10-21	2008-10-21	KA3554G01:2
2008-09-01	2008-09-01	HD0025A:	2008-10-22	2008-10-22	KA3542G01:3
2008-09-01	2008-09-01	KA2050A:	2008-10-22	2008-10-22	KA3546G01:2
2008-09-01	2008-09-01	KA3385A:1	2008-10-22	2008-10-22	KA3548A01:3
2008-09-01	2008-09-01	SA3045A:2	2008-10-22	2008-10-22	KA3554G01:2
2008-09-03	2008-09-03	KA1755A:3	2008-10-23	2008-10-23	KA3539G:2
2008-09-03	2008-09-03	KA2162B:1	2008-10-23	2008-10-23	KA3542G02:2
2008-09-03	2008-09-03	KA2862A:1	2008-10-23	2008-10-23	KA3548A01:3
2008-09-03	2008-09-03	KA3573A:1	2008-10-23	2008-10-23	KA3552G01:2
2008-09-03	2008-09-03	KA3573A:2	2008-10-23	2008-10-23	KA3554G02:4
2008-09-03	2008-09-03	KA3600F:1	2008-10-24	2008-10-24	KA3542G02:2
2008-09-03	2008-09-03	KA3600F:2	2008-10-28	2008-12-02	KA3554G02:4
2008-09-10	2008-09-10	KA1061A:1	2008-11-13	2008-11-13	KA3110A:1
2008-09-16	2008-09-16	KA3600F:1	2008-12-02	2008-12-02	KG0021A01:3
2008-09-16	2008-09-16	KA3600F:2	2008-12-02	2008-12-02	KG0048A01:3
2008-09-18	2008-09-18	SA3045A:2			
2008-09-22	2008-09-22	HD0025A:			

4.4 Packer expansion and release

Packers often isolate different fractures or fracture zones from each other in order to prevent flow along the borehole, which otherwise may act as a connection between fractures or zones. Therefore, release and expansion of packers may have an influence on the groundwater system. The dates for packer expansion/release in surface boreholes are listed in Table 4-3 (this refers to the large borehole packers and not the PEM-packers). Surface boreholes not included in the table have no packers.

In Table 4-4, dates for packer expansion and release in tunnel boreholes are presented.

Table 4-3. Packer expansion and release in surface boreholes.

Borehole	Expansion	Release
HBH04	2002-02-28	
KAS03	2000-10-09	<i>2005-07-04</i>
KAS09	1990-01-01	
KAS16	1992-10-20	
KBH02	1992-05-07	

Italics = This information is not found in the Sicada database

Table 4-4. Packer expansion and release in tunnel boreholes.

Borehole	Expansion	Release	Borehole	Expansion	Release
HA1273A	1992-03-12		KA3553B01	2002-01-30	
HA1278A	1992-09-10		KA3554G01	2003-04-27	
HA1279A	1992-09-10		KA3554G02	2003-04-27	
HA1283B	1992-04-15		KA3557G	2002-01-29	
HA1327B	1992-09-11		KA3563A01	2001-04-02	
HA1330B	1992-09-11		KA3563D01	2001-04-02	
HD0025A	1996-06-02		KA3563G	2001-03-27	
KA1061A	1992-01-14		KA3563I01	2001-04-03	
KA1131B	1992-02-02		KA3566C01	2001-04-02	
KA1751A	2002-01-30		KA3566G01	2001-03-20	
KA1754A	2002-01-30		KA3566G02	2001-03-20	
KA1755A	2003-05-06		KA3568D01	2001-04-02	
KA2048B	2002-01-11		KA3572G01	2001-03-21	
KA2050A	2001-12-13		KA3573A	2001-03-29	
KA2162B	1999-10-28		KA3573C01	2001-04-02	
KA2511A	1999-03-17		KA3574D01	2001-04-02	
KA2563A	1999-03-15		KA3574G01	2001-03-07	
KA2598A	1998-03-04		KA3576G01	2001-03-07	
KA2858A	2002-01-11		KA3578C01	2001-04-03	
KA2862A	2002-03-22		KA3578G01	2001-03-08	
KA3005A	2001-11-07		KA3578H01	2001-04-03	
KA3010A	2004-06-29		KA3579D01	2001-04-03	
KA3065A02	2002-06-29		KA3579G	2001-03-08	
KA3065A03	2002-06-28		KA3584G01	1999-02-03	
KA3067A	2002-06-29		KA3588C01	2001-04-03	
KA3068A	2002-06-29		KA3588D01	2001-04-03	
KA3105A	2001-12-19		KA3588I01	2001-04-03	
KA3110A	2004-06-29		KA3590G01	2001-02-28	
KA3385A	2003-05-06		KA3590G02	2001-03-06	
KA3386A01	2005-12-05	2006-01-29	KA3592C01	2001-04-03	
KA3386A01	2006-01-30		KA3593G	2001-02-27	
KA3510A	2001-05-09		KA3597D01	2001-04-03	
KA3539G	2002-12-03		KA3597H01	2001-04-03	
KA3542G01	2003-04-26		KA3600F	2001-03-28	
KA3542G02	2003-04-26		KF0051A01	2006-01-20	
KA3543A01	2002-01-30		KF0069A01	2002-05-21	
KA3543I01	2002-01-30		KG0021A01	2001-05-30	
KA3544G01	2002-11-12		KG0048A01	2001-05-29	
KA3546G01	2003-04-26		KI0023B	1998-06-17	
KA3548A01	2003-04-26		KI0025F	1999-07-28	
KA3548D01	2002-01-30		KI0025F02	2003-09-02	
KA3548G01	2002-01-30		KI0025F03	2003-06-25	
KA3550G01	2003-04-27		KXTT1	2001-11-07	
KA3550G05	2002-01-29		KXTT2	2005-11-18	
KA3551G05	2003-04-27		KXTT5	2004-06-30	
KA3552A01	2002-01-30		SA3045A	2002-06-29	
KA3552G01	2000-06-07				
KA3552H01	2002-12-01				

4.5 Drilling

Only tunnel boreholes have been drilled during 2008 within the Äspö Hard Rock Laboratory.

During drilling, water is injected under high pressure into the borehole, and the effect at different locations in the borehole may be either injection or removal of water. During drilling interruptions, water flows out of the borehole and the net result on pressure registrations mainly seems to be a pumping effect. In Table 4-5, dates when boreholes were drilled, borehole length and type of drilling are presented. Drilling before rounds and drilling for bolting are not included in the table.

Table 4-5. Drilling.

Start	Stop	Borehole	Borehole length (m)	Type of drilling
2008-01-02	2008-01-02	SS0008F03	18.55	Percussion drilling
2008-01-07	2008-01-07	SS0008F01	19.40	Percussion drilling
2008-01-07	2008-01-07	SS0008F02	18.64	Percussion drilling
2008-01-07	2008-01-07	SS0008F04	18.67	Percussion drilling
2008-01-10	2008-01-10	SS0008I14	23.90	Percussion drilling
2008-01-10	2008-01-10	SS0008A04	24.67	Percussion drilling
2008-01-10	2008-01-10	SS0008I10	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008C01	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008A08	24.34	Percussion drilling
2008-01-10	2008-01-10	SS0008I06	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008A12	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008I02	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008A16	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008D01	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008A20	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008B24	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008A24	25.00	Percussion drilling
2008-01-10	2008-01-10	SS0008B20	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008B16	24.85	Percussion drilling
2008-01-14	2008-01-14	SS0008H02	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008B12	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008H06	24.66	Percussion drilling
2008-01-14	2008-01-14	SS0008B08	24.95	Percussion drilling
2008-01-14	2008-01-14	SS0008H10	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008B04	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008H14	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008I18	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008G29	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008G13	25.00	Percussion drilling
2008-01-14	2008-01-14	SS0008G25	25.00	Percussion drilling
2008-01-14	2008-01-15	SS0008G09	26.18	Percussion drilling
2008-01-15	2008-01-15	SS0008G21	25.00	Percussion drilling
2008-01-15	2008-01-15	SS0008G05	25.00	Percussion drilling
2008-01-15	2008-01-15	SS0008G17	25.00	Percussion drilling
2008-01-15	2008-01-15	SS0008G01	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008G03	25.57	Percussion drilling
2008-01-28	2008-01-28	SS0008C03	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008H08	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008B02	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008A18	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008B06	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008B10	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008B14	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008B18	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008A10	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008B22	24.73	Percussion drilling
2008-01-28	2008-01-28	SS0008A02	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008I16	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008G27	24.68	Percussion drilling
2008-01-28	2008-01-28	SS0008I12	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008G23	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008I08	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008G15	25.00	Percussion drilling
2008-01-28	2008-01-28	SS0008D03	25.00	Percussion drilling
2008-02-04	2008-02-04	SS0008B01	25.00	Percussion drilling
2008-02-04	2008-02-04	SS0008H07	25.00	Percussion drilling
2008-02-04	2008-02-04	SS0008B17	25.28	Percussion drilling
2008-02-04	2008-02-04	SS0008A13	24.41	Percussion drilling
2008-02-04	2008-02-04	SS0008B19	25.00	Percussion drilling
2008-02-04	2008-02-04	SS0008G28	25.00	Percussion drilling
2008-02-04	2008-02-04	SS0008D02	25.00	Percussion drilling
2008-02-28	2008-02-28	SS0010G04	1.60	Percussion drilling
2008-02-28	2008-02-28	SS0010G03	1.60	Percussion drilling

Start	Stop	Borehole	Borehole length (m)	Type of drilling
2008-02-28	2008-02-28	SS0010G02	1.50	Percussion drilling
2008-02-28	2008-02-28	SS0010G01	1.60	Percussion drilling
2008-03-07	2008-03-10	KQ0054G06	5.64	Core drilling
2008-03-10	2008-03-11	KQ0054G05	5.52	Core drilling
2008-03-12	2008-03-13	KQ0054G04	5.10	Core drilling
2008-03-17	2008-03-17	KQ0054G07	5.40	Core drilling
2008-03-18	2008-03-18	KQ0053G01	5.35	Core drilling
2008-03-19	2008-03-20	KQ0054G03	5.30	Core drilling
2008-03-25	2008-03-25	KQ0054G02	5.60	Core drilling
2008-03-25	2008-03-25	SS0020F02	3.95	Percussion drilling
2008-03-25	2008-03-25	SS0020F01	13.52	Percussion drilling
2008-03-25	2008-03-25	SS0020F03	13.43	Percussion drilling
2008-03-26	2008-03-26	KQ0054G01	5.87	Core drilling
2008-03-26	2008-03-26	SS0020G29	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020G13	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020G09	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020G25	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020G21	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020G05	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020G01	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020G17	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020A04	20.45	Percussion drilling
2008-03-26	2008-03-26	SS0020B04	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020A08	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020B08	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020B17	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020C01	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020B16	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020H02	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020B20	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020H06	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020B24	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020H10	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020A24	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020D01	20.60	Percussion drilling
2008-03-26	2008-03-26	SS0020A20	20.60	Percussion drilling
2008-03-27	2008-03-27	SS0020A16	20.60	Percussion drilling
2008-03-27	2008-03-27	SS0020I02	20.59	Percussion drilling
2008-03-27	2008-03-27	SS0020A12	20.60	Percussion drilling
2008-03-27	2008-03-27	SS0020I06	20.60	Percussion drilling
2008-03-27	2008-03-27	SS0020I10	20.60	Percussion drilling
2008-03-27	2008-03-27	SS0020I14	20.60	Percussion drilling
2008-03-27	2008-03-27	SS0020I18	20.60	Percussion drilling
2008-03-27	2008-03-27	SS0020H14	20.60	Percussion drilling
2008-03-27	2008-03-27	KQ0046G07	5.36	Core drilling
2008-03-28	2008-04-02	KQ0046G04	5.14	Core drilling
2008-04-02	2008-04-02	SS0020I04	20.60	Percussion drilling
2008-04-02	2008-04-02	SS0020G19	19.61	Percussion drilling
2008-04-02	2008-04-02	SS0020D03	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020G15	19.50	Percussion drilling
2008-04-02	2008-04-03	KQ0046G03	5.19	Core drilling
2008-04-02	2008-04-02	SS0020A06	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020B26	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020A10	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020B22	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020A18	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020B18	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020A22	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020B14	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020A26	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020B10	19.50	Percussion drilling
2008-04-02	2008-04-02	SS0020C03	19.49	Percussion drilling
2008-04-03	2008-04-04	KQ0048G04	5.19	Core drilling
2008-04-07	2008-04-07	KQ0048G05	5.21	Core drilling
2008-04-08	2008-04-08	KQ0051G04	5.37	Core drilling

Start	Stop	Borehole	Borehole length (m)	Type of drilling
2008-04-08	2008-04-08	SS0020A09	18.44	Percussion drilling
2008-04-08	2008-04-08	SS0020G12	18.58	Percussion drilling
2008-04-08	2008-04-08	SS0020B09	18.50	Percussion drilling
2008-04-08	2008-04-08	SS0020A21	18.50	Percussion drilling
2008-04-08	2008-04-08	SS0020A23	18.50	Percussion drilling
2008-04-08	2008-04-08	SS0020I03	18.75	Percussion drilling
2008-04-08	2008-04-08	SS0020H05	18.50	Percussion drilling
2008-04-09	2008-04-09	KQ0051G05	5.26	Core drilling
2008-04-10	2008-04-10	KQ0046G06	5.83	Core drilling
2008-04-14	2008-04-14	KQ0046G05	5.73	Core drilling
2008-04-14	2008-04-15	KQ0046G02	5.72	Core drilling
2008-04-16	2008-04-16	KQ0046G01	6.01	Core drilling
2008-04-16	2008-04-16	KQ0045G01	5.16	Core drilling
2008-05-05	2008-05-14	KQ0046G04	5.07	Percussion drilling
2008-05-08	2008-05-13	KQ0046G03	5.12	Percussion drilling
2008-05-19	2008-05-19	SS0032F02	20.00	Percussion drilling
2008-05-19	2008-05-19	SS0032F01	20.00	Percussion drilling
2008-05-19	2008-05-21	KQ0054G03	5.33	Percussion drilling
2008-05-19	2008-05-20	SS0032F03	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032G07	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032G03	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032A02	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032B02	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032A06	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032B06	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032H01	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032I01	20.00	Percussion drilling
2008-05-21	2008-05-21	SS0032H05	20.00	Percussion drilling
2008-05-22	2008-05-27	KQ0054G04	5.14	Percussion drilling
2008-05-26	2008-05-26	SS0032G01	19.00	Percussion drilling
2008-05-26	2008-05-26	SS0032A04	19.00	Percussion drilling
2008-05-26	2008-05-26	SS0032B04	19.00	Percussion drilling
2008-05-26	2008-05-26	SS0032G09	19.00	Percussion drilling
2008-05-26	2008-05-26	SS0032B08	19.00	Percussion drilling
2008-05-26	2008-05-26	SS0032A08	19.00	Percussion drilling
2008-05-26	2008-05-26	SS0032I03	19.00	Percussion drilling
2008-05-26	2008-05-26	SS0032H03	19.00	Percussion drilling
2008-05-26	2008-05-26	SS0032G05	19.00	Percussion drilling
2008-05-27	2008-05-27	SS0032I02	18.00	Percussion drilling
2008-05-27	2008-05-27	SS0032A05	18.00	Percussion drilling
2008-05-27	2008-05-27	SS0032H02	18.00	Percussion drilling
2008-05-27	2008-05-27	SS0032B05	18.00	Percussion drilling
2008-05-27	2008-05-27	SS0032G06	18.00	Percussion drilling
2008-05-27	2008-05-28	KQ0051G04	5.43	Percussion drilling
2008-05-29	2008-06-03	KQ0051G05	5.40	Percussion drilling
2008-06-03	2008-06-05	KQ0048G04	5.24	Percussion drilling
2008-06-09	2008-06-10	KQ0048G05	5.30	Percussion drilling
2008-06-24	2008-06-25	KQ0048G02	6.00	Core drilling
2008-06-25	2008-06-25	SS0034G04	1.50	Percussion drilling
2008-06-25	2008-06-25	SS0034G03	1.50	Percussion drilling
2008-06-25	2008-06-25	SS0034G02	1.50	Percussion drilling
2008-06-25	2008-06-25	SS0034G01	1.60	Percussion drilling
2008-06-25	2008-06-25	SS0033G04	1.50	Percussion drilling
2008-06-25	2008-06-25	SS0033G03	1.50	Percussion drilling
2008-06-25	2008-06-25	SS0033G02	1.50	Percussion drilling
2008-06-25	2008-06-25	SS0033G01	1.50	Percussion drilling
2008-06-26	2008-06-26	KQ0051G02	6.02	Core drilling
2008-06-30	2008-06-30	KQ0051G03	5.73	Core drilling
2008-07-01	2008-07-01	KQ0051G01	5.20	Core drilling
2008-07-03	2008-07-03	KQ0052G01	5.50	Core drilling
2008-07-03	2008-07-04	KQ0051G06	5.70	Core drilling
2008-07-21	2008-07-21	KQ0048G07	6.13	Core drilling
2008-07-22	2008-07-22	KQ0048G06	5.67	Core drilling
2008-07-22	2008-07-22	KQ0047G02	5.39	Core drilling
2008-07-23	2008-07-23	KQ0048G08	5.32	Core drilling

Start	Stop	Borehole	Borehole length (m)	Type of drilling
2008-07-23	2008-07-24	KS0044B01	2.10	Core drilling
2008-07-23	2008-07-23	KQ0048G03	5.44	Core drilling
2008-07-23	2008-07-24	KS0043B01	1.97	Core drilling
2008-07-24	2008-07-24	KS0042B01	1.65	Core drilling
2008-07-24	2008-07-24	KQ0051G07	5.78	Core drilling
2008-07-24	2008-07-25	KS0041B01	2.06	Core drilling
2008-07-25	2008-07-25	KS0040B01	2.03	Core drilling
2008-07-25	2008-07-25	KS0039B01	2.06	Core drilling
2008-07-29	2008-07-29	KS0037B01	1.75	Core drilling
2008-07-29	2008-07-29	KS0036B01	1.73	Core drilling
2008-07-30	2008-07-31	KS0044B02	2.05	Core drilling
2008-07-30	2008-07-31	KS0043B02	2.05	Core drilling
2008-07-30	2008-07-30	KS0041B02	2.00	Core drilling
2008-07-30	2008-07-31	KS0042B02	2.20	Core drilling
2008-07-31	2008-07-31	KS0040B02	2.00	Core drilling
2008-07-31	2008-07-31	KS0039B02	2.15	Core drilling
2008-07-31	2008-07-31	KS0036B02	1.95	Core drilling
2008-07-31	2008-08-01	KS0038B02	2.00	Core drilling
2008-07-31	2008-08-01	KS0037B02	2.05	Core drilling
2008-08-25	2008-08-25	SS0048F01	20.00	Percussion drilling
2008-08-25	2008-08-25	SS0048F02	20.00	Percussion drilling
2008-08-25	2008-08-25	SS0048F03	20.00	Percussion drilling
2008-08-25	2008-08-25	SS0048F04	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048A01	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048I03	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048A04	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048B06	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048A07	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048G02	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048G04	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048H02	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048B01	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048I05	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048B04	20.00	Percussion drilling
2008-08-27	2008-08-27	SS0048H04	20.00	Percussion drilling
2008-09-02	2008-09-02	SS0048H05	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048G06	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048B02	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048H03	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048B05	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048H01	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048I01	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048A05	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048I04	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048A03	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048G03	19.00	Percussion drilling
2008-09-02	2008-09-02	SS0048G01	19.00	Percussion drilling
2008-09-08	2008-09-08	SS0048I02	18.00	Percussion drilling
2008-09-08	2008-09-08	SS0048A06	18.00	Percussion drilling
2008-09-08	2008-09-08	SS0048A02	18.00	Percussion drilling
2008-09-08	2008-09-08	SS0048B03	18.00	Percussion drilling
2008-09-08	2008-09-08	SS0048G05	18.00	Percussion drilling
2008-10-07	2008-10-07	SS0050G04	1.50	Percussion drilling
2008-10-07	2008-10-07	SS0050G03	1.50	Percussion drilling
2008-10-07	2008-10-07	SS0050G01	1.50	Percussion drilling
2008-10-07	2008-10-07	SS0050G02	1.50	Percussion drilling
2008-10-15	2008-10-15	KA1362A01	1.20	Core drilling
2008-11-03	2008-11-03	SS0064F04	20.00	Percussion drilling
2008-11-03	2008-11-03	SS0064F02	20.00	Percussion drilling
2008-11-03	2008-11-03	SS0064F01	20.00	Percussion drilling
2008-11-03	2008-11-03	SS0064F03	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064H07	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064B05	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064H03	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064B09	20.00	Percussion drilling

Start	Stop	Borehole	Borehole length (m)	Type of drilling
2008-11-05	2008-11-05	SS0064I05	19.00	Percussion drilling
2008-11-05	2008-11-05	SS0064A05	16.50	Percussion drilling
2008-11-05	2008-11-05	SS0064I03	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064I07	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064A09	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064B01	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064G04	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064A01	20.00	Percussion drilling
2008-11-05	2008-11-05	SS0064G08	20.00	Percussion drilling
2008-11-12	2008-11-12	SS0064G06	19.00	Percussion drilling
2008-11-12	2008-11-12	SS0064A03	19.00	Percussion drilling
2008-11-12	2008-11-12	SS0064G10	19.00	Percussion drilling
2008-11-12	2008-11-12	SS0064G02	19.00	Percussion drilling
2008-11-12	2008-11-12	SS0064B03	19.00	Percussion drilling
2008-11-12	2008-11-12	SS0064H09	19.00	Percussion drilling
2008-11-12	2008-11-12	SS0064H05	19.00	Percussion drilling
2008-11-12	2008-11-12	SS0064B07	19.00	Percussion drilling
2008-11-12	2008-11-13	SS0064H01	19.00	Percussion drilling
2008-11-12	2008-11-13	SS0064I01	19.00	Percussion drilling
2008-11-13	2008-11-13	SS0064A07	19.00	Percussion drilling
2008-11-19	2008-11-19	SS0064G09	18.00	Percussion drilling
2008-11-19	2008-11-19	SS0064A02	18.00	Percussion drilling
2008-11-19	2008-11-19	SS0064B04	18.00	Percussion drilling
2008-11-19	2008-11-19	SS0064A08	18.00	Percussion drilling
2008-11-19	2008-11-19	SS0064I02	18.00	Percussion drilling
2008-11-24	2008-11-24	KA1362A02	0.90	Core drilling
2008-11-24	2008-11-24	KA1362A03	1.85	Core drilling
2008-11-25	2008-11-25	KA1362A04	2.00	Core drilling
2008-11-25	2008-11-26	KA1362A05	3.55	Core drilling
2008-11-26	2008-11-27	KA1362A06	4.77	Core drilling

4.6 Tests

During 2008 only pressure build-up tests have been performed.

In a pressure build-up test the borehole is discharged between 30 minutes and a few hours before the valve is closed and the pressure recovery is studied.

Table 4-6. Tests.

From	To	Borehole:sec	Borehole length (m)		Activity
			from	to	
2008-01-03	2008-01-04	SS0008F03:	1.50	18.54	Pressure Build Up Test (PBT)
2008-01-09	2008-01-10	SS0008F03:	1.50	18.54	Pressure Build Up Test (PBT)
2008-01-24	2008-01-25	SS0008F03:	1.50	18.54	Pressure Build Up Test (PBT)
2008-01-31	2008-02-01	SS0008F03:	1.50	18.54	Pressure Build Up Test (PBT)
2008-02-06	2008-02-06	SS0008F03:	1.50	20.00	Pressure Build Up Test (PBT)
2008-02-28	2008-02-28	SS0010G01:	0.30	1.60	Pressure Build Up Test (PBT)
2008-02-28	2008-02-28	SS0010G02:	0.40	1.50	Pressure Build Up Test (PBT)
2008-02-28	2008-02-28	SS0010G03:	0.30	1.60	Pressure Build Up Test (PBT)
2008-02-28	2008-02-28	SS0010G04:	0.30	1.60	Pressure Build Up Test (PBT)
2008-03-11	2008-03-11	DA1619A02:5	61.00	62.60	Pressure Build Up Test (PBT)
2008-03-13	2008-03-13	DA1619A02:4	52.50	54.10	Pressure Build Up Test (PBT)
2008-03-17	2008-03-18	DA1619A02:2	29.10	30.70	Pressure Build Up Test (PBT)
2008-03-19	2008-03-19	DA1619A02:5	61.00	62.60	Pressure Build Up Test (PBT)
2008-04-17	2008-04-18	KQ0046G03:			Pressure Build Up Test (PBT)
2008-04-18	2008-04-18	KQ0046G04:			Pressure Build Up Test (PBT)
2008-04-18	2008-04-18	KQ0048G04:			Pressure Build Up Test (PBT)
2008-04-21	2008-04-21	KQ0046G05:			Pressure Build Up Test (PBT)
2008-04-21	2008-04-21	KQ0051G04:			Pressure Build Up Test (PBT)
2008-04-21	2008-04-22	KQ0051G05:			Pressure Build Up Test (PBT)

From	To	Borehole:sec	Borehole length (m)		Activity
			from	to	
2008-04-22	2008-04-22	KQ0054G03:			Pressure Build Up Test (PBT)
2008-04-22	2008-04-23	KQ0054G04:			Pressure Build Up Test (PBT)
2008-04-23	2008-04-23	KQ0046G03:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0048G02:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0048G03:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0048G04:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0048G05:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0048G06:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0048G07:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0051G02:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0051G03:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0051G04:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0051G05:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0051G06:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0051G07:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0054G01:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0054G02:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0054G03:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0054G04:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0054G05:			Pressure Build Up Test (PBT)
2008-04-25	2008-04-25	KQ0054G06:			Pressure Build Up Test (PBT)
2008-05-20	2008-05-20	SS0032F01:	8.00	20.00	Pressure Build Up Test (PBT)
2008-05-20	2008-05-20	SS0032F01:	3.00	20.00	Pressure Build Up Test (PBT)
2008-06-25	2008-06-25	SS0034G01:	0.30	1.60	Pressure Build Up Test (PBT)
2008-06-25	2008-06-25	SS0034G02:	0.30	1.50	Pressure Build Up Test (PBT)
2008-06-25	2008-06-25	SS0034G03:	0.30	1.50	Pressure Build Up Test (PBT)
2008-06-25	2008-06-25	SS0034G04:	0.30	1.50	Pressure Build Up Test (PBT)
2008-10-07	2008-10-07	SS0050G01:	0.30	1.50	Pressure Build Up Test (PBT)
2008-10-07	2008-10-07	SS0050G03:	0.30	1.50	Pressure Build Up Test (PBT)
2008-10-07	2008-10-07	SS0050G04:	0.30	1.50	Pressure Build Up Test (PBT)
2008-10-07	2008-10-07	SS0050G02:	0.40	1.50	Pressure Build Up Test (PBT)
2008-10-20	2008-10-20	KA3554G01:2	22.60	24.15	Pressure Build Up Test (PBT)
2008-10-20	2008-10-20	KA3539G:2	15.85	17.60	Pressure Build Up Test (PBT)
2008-10-20	2008-10-20	KA3542G01:3	18.60	20.30	Pressure Build Up Test (PBT)
2008-10-21	2008-10-21	KA3554G02:4	10.50	12.20	Pressure Build Up Test (PBT)
2008-10-21	2008-10-21	KA3554G01:2	22.60	24.15	Pressure Build Up Test (PBT)
2008-10-21	2008-10-21	KA3539G:2	15.85	17.60	Pressure Build Up Test (PBT)
2008-10-21	2008-10-21	KA3548A01:3	8.80	10.75	Pressure Build Up Test (PBT)
2008-10-21	2008-10-21	KA3542G01:3	18.60	20.30	Pressure Build Up Test (PBT)
2008-10-22	2008-10-22	KA3548A01:3	8.80	10.75	Pressure Build Up Test (PBT)
2008-10-22	2008-10-22	KA3554G01:2	22.60	24.15	Pressure Build Up Test (PBT)
2008-10-22	2008-10-22	KA3546G01:2	6.75	8.30	Pressure Build Up Test (PBT)
2008-10-22	2008-10-22	KA3542G01:3	18.60	20.30	Pressure Build Up Test (PBT)
2008-10-23	2008-10-23	KA3548A01:3	8.80	10.75	Pressure Build Up Test (PBT)
2008-10-23	2008-10-23	KA3552G01:2	4.35	6.05	Pressure Build Up Test (PBT)
2008-10-23	2008-10-23	KA3554G02:4	10.50	12.20	Pressure Build Up Test (PBT)
2008-10-23	2008-10-23	KA3542G02:2	25.60	27.20	Pressure Build Up Test (PBT)
2008-10-24	2008-10-24	KA3542G02:2	25.60	27.20	Pressure Build Up Test (PBT)

5 Results

5.1 Groundwater levels in surface boreholes

Annual diagrams of groundwater levels are presented in Appendix 1.

In most surface boreholes, there have only been small changes in groundwater levels during 2008. In most of the borehole sections, the change over the year is within some metre with both increasing and decreasing levels.

The response to precipitation varies from borehole to borehole. In some boreholes, there is a fairly quick response with pronounced peaks after each rain (for example HAS01 and HAS13). In other boreholes, the response is more or less dampened, while in some sections it is difficult to see any responses to rain at all. The dominating features of the seasonal variation during 2008 are high precipitation during August and October and low precipitation in February and May (see Figure 5-2).

In the short term, the groundwater levels in surface boreholes seem to be influenced mainly by variations in climate factors. However, in borehole HAS06 a pronounced effect from tunnel activities can be seen. As seen earlier, the groundwater level in HAS06 responds to activities in the tunnel borehole KA3065A03 and its surrounding boreholes. In addition, there are probably minor responses also in other boreholes due to tunnel activities.

5.2 Groundwater pressure in tunnel boreholes

Annual diagrams of groundwater pressure in tunnel borehole sections are presented in Appendix 2.

In the tunnel, the pressure in most of the borehole sections decreased by about 5 - 100 kPa (0.5-10 m) during 2008. However, there were also a large number of sections, mainly in the Prototype area in the deeper part of the tunnel, with increasing pressure during the year. Due to a lot of activities in the tunnel (for example blasting of a new tunnel, drilling, packer expansion and releases, opening, closing and pumping different boreholes), it is difficult to say whether the pressure changes are “natural” or due to the activities. Seen over the last years, pressures have been steadily decreasing in most of the boreholes except during 2003 when many borehole sections showed increasing pressure.

Some activities during the year causing major disturbances, as seen in many boreholes, in the tunnel were:

- Blasting of a new tunnel, TASS, at the -450 m level, starting in November 2007 and continuing throughout the year 2008.
- Drilling of boreholes in the tunnels TASS and TASQ, with subsequent activities (pressure build up tests, etc.) during the year.

- Hydraulic tests performed in boreholes in the Prototype area at the end of October.
- Due to computer errors at a measurement station (HMSE), data are missing for some days in January, March, July and August for the boreholes connected to this station.

5.3 Water flow in the tunnel

Annual diagrams of water flow in the tunnel, measured at gauging boxes at different tunnel lengths, are presented in Appendix 3.

The flow in the gauging boxes is shown in Figure 5-1 as daily mean values during October - December 2008. For comparison, data for the corresponding period during the years 1995-2007 are also illustrated. Although data is missing for some boxes for certain periods (especially during 1995 and 1996), the diagram gives realistic values since the flow has been fairly constant during the period presented.

Figure 5-1 shows that, seen over all years, the mean flow for the comparison period October – December has decreased at most locations. However, during 2007 there was an increase in some of the gauging boxes, especially the ones located in the deepest part of the tunnel. This may be a result of the excavation of a new side tunnel and drilling of new boreholes, plus the addition of external water in connection to these and other activities.

In January 2002, a new gauging box, MG0004G, was installed. The water from the G-tunnel, earlier collected in the gauging box MF0061G, is now lead to MG0004G. As a result, a flow decrease in MF0061G was noted and this also explains the low values for the year 2002 and forward in Figure 5-1.

In February 2004, measurements were started in three new weirs, MA3515G, MA3525G and MA3535G. These weirs collect water from various sections in the Prototype repository tunnel. The accuracy of the flow calculations for these weirs is very low, the error may be on the order of a factor 10 and almost always resulting in flow values that are too high. However, the water passing the three new weirs flows into gauging box MA3426G, as it was before the new weirs were installed.

From June 2008 all values from MA3535G are missing due to erroneous values from the water level gauge.

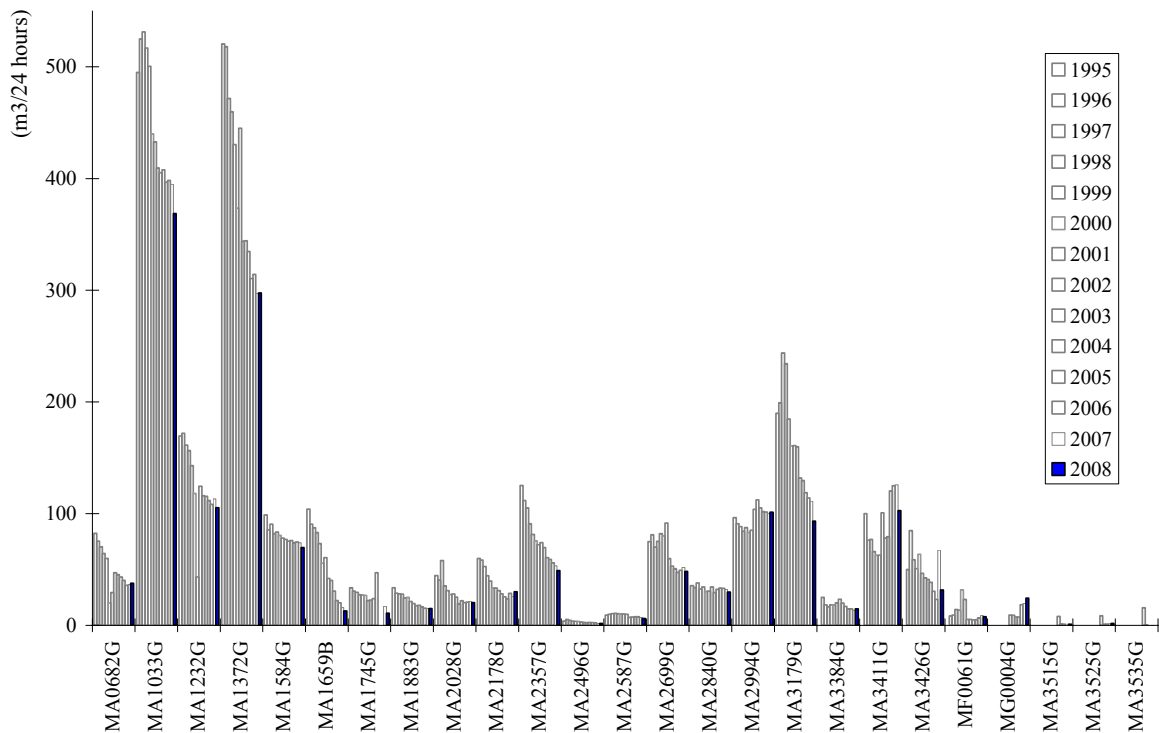


Figure 5-1. Water flow in gauging boxes as a mean during October - December.

5.4 Water flow in tunnel pipes

Annual diagram of the flow rate of water pumped out from the tunnel is presented in Appendix 4.

The pumped flow rate out from the tunnel has been decreasing steadily since 1995, except during 2007 when the flow increased. This increase can be related to various activities in the deepest parts of the tunnel system.

Values for the mean daily flow of water in the pipes during October - December for the last fourteen years are given in Table 5-1.

Table 5-1. Water flow in tunnel pipes, October - December.

Year	Water in (m ³ /d)	Water out (m ³ /d)
1995	4.4	2479
1996	9.6	2438
1997	11.0	2393
1998	9.2	2268
1999	—	2105
2000	—	1930
2001	—	1848
2002	—	1821
2003	—	1748
2004	—	1730
2005	—	1697
2006	—	1686
2007	—	1702
2008	—	1686

5.5 Electrical conductivity of tunnel water

Annual diagrams of electrical conductivity of tunnel water are presented in Appendix 5.

Electrical conductivity of tunnel water has been measured in eight gauging boxes for flow measurements, at one location along the discharge pipe leading water from the gauging boxes to one of the sumps and in two of the sumps (see section 3.6).

The same electrical conductivity meter is used for periods in the four gauging boxes MA3384G, MA3411G, MA3426G, MF0061G and in the sump PG5, all in the deepest part of the tunnel system.

5.6 Temperature, humidity and pressure of tunnel air

Annual diagrams of temperature, humidity and pressure of tunnel air are presented in Appendix 6.

Temperature and relative humidity of tunnel air are measured at thirteen places in the Äspö tunnel, starting in November 2006 (see section 3.7). Also, measurements are made of incoming and outgoing air in the ventilation shafts. At three of these positions air pressure is also measured.

5.7 Precipitation

Precipitation values at the SKB station at Norra Äspö for 2006-2008 and at the SMHI station in Oskarshamn for 1987-2005, as well as means for Oskarshamn for the period 1961-1990, are presented in Figures 5-2 and 5-3. All precipitation values are measured values without any corrections. See also section 3.8.1.

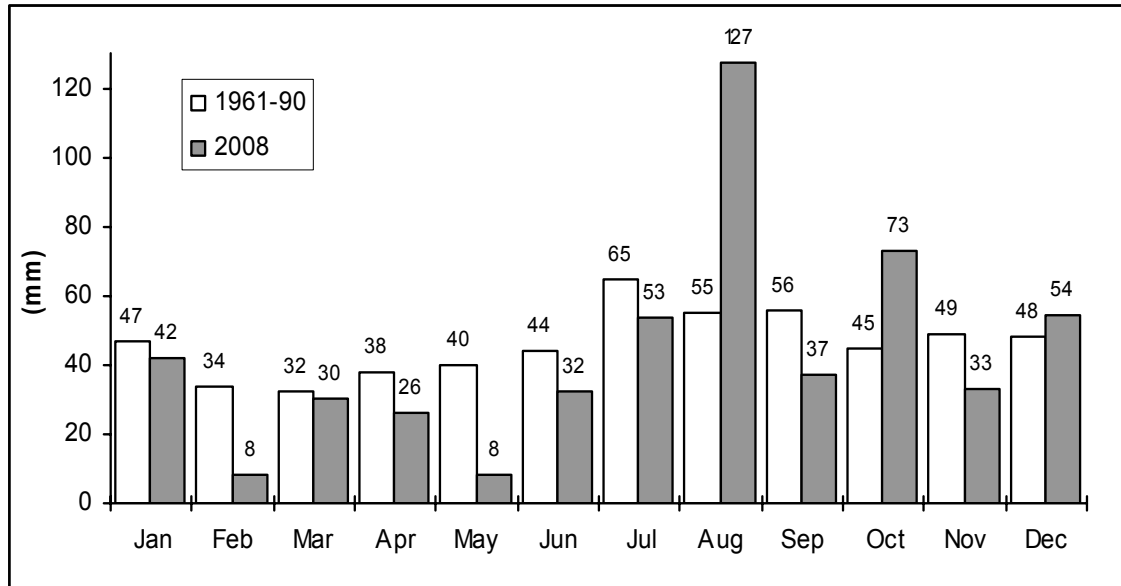


Figure 5-2. Precipitation at Oskarshamn/Äspö: Monthly values for Norra Äspö 2008 and monthly means for Oskarshamn 1961 – 1990.

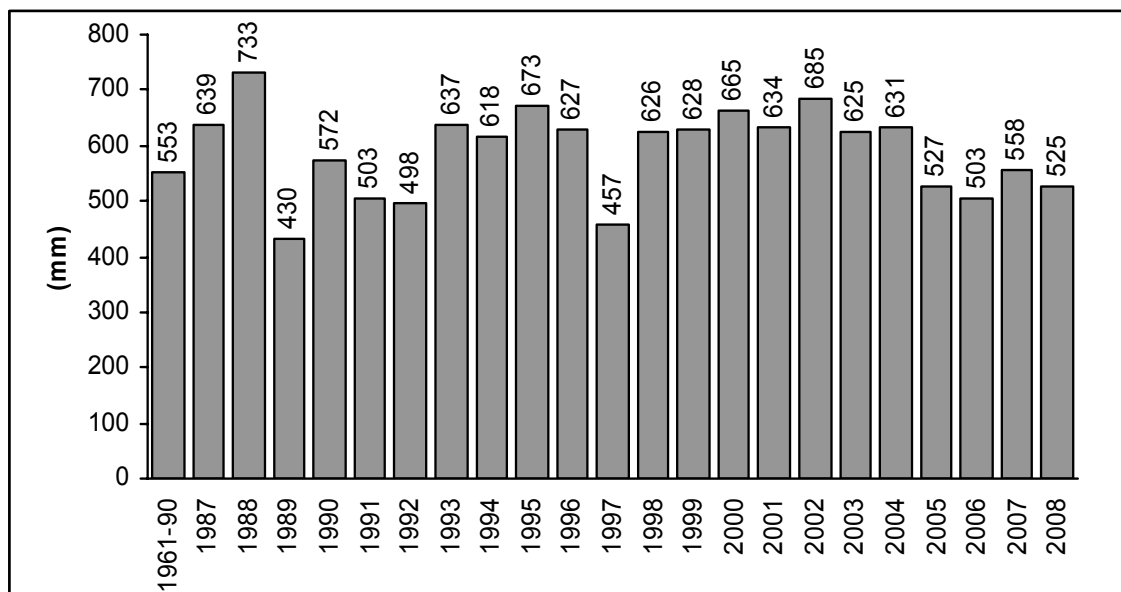


Figure 5-3. Precipitation at Oskarshamn/Äspö. Yearly values for Norra Äspö 2006 - 2008 and for Oskarshamn 1987 - 2005 and yearly mean for Oskarshamn for the period 1961 - 1990.

5.8 Air temperature

Values of temperature at the SKB station at Norra Äspö for 2006-2008 and at the SMHI station in Oskarshamn for 1987-2005, as well as means for Oskarshamn for the period 1961-1990, are presented in Figures 5-4 and 5-5. See also section 3.8.2.

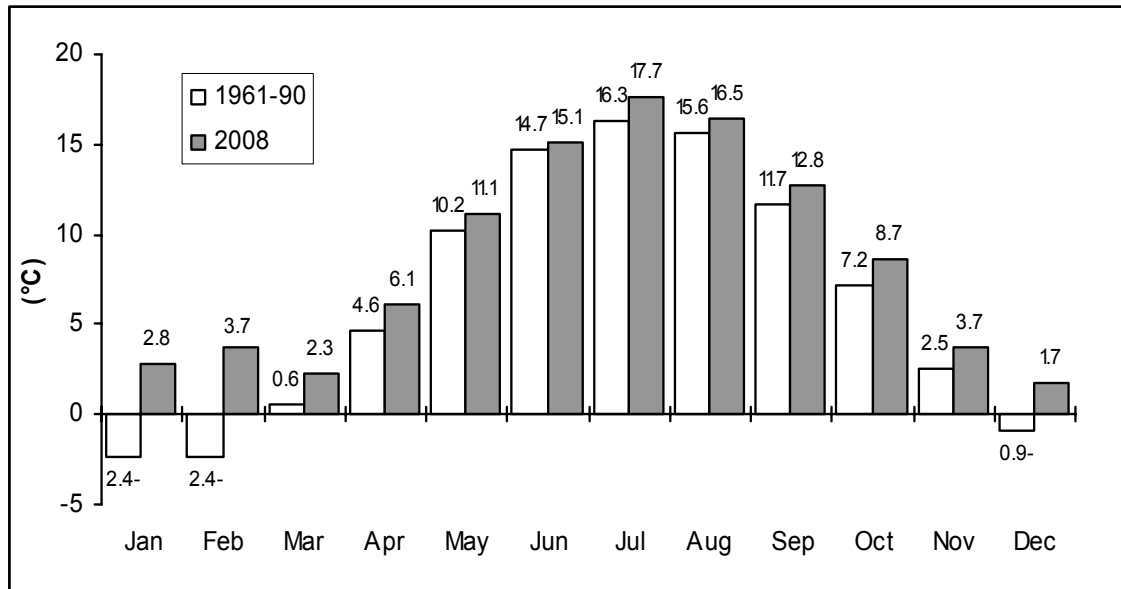


Figure 5-4. Temperature at Oskarshamn/Äspö: Monthly values for Norra Äspö 2008 and monthly means for Oskarshamn 1961 – 1990.

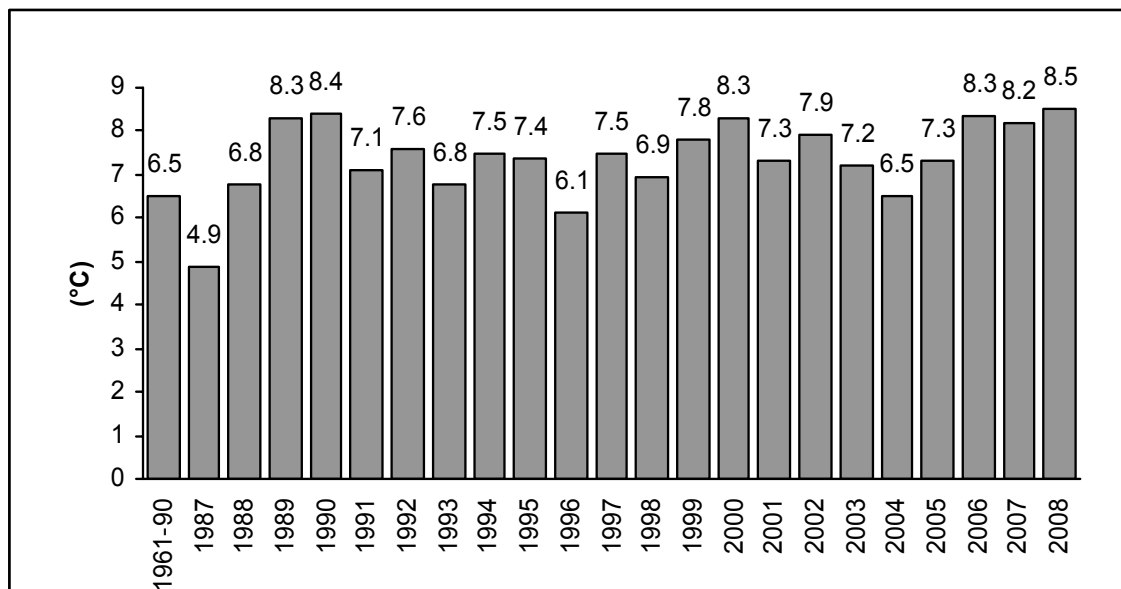


Figure 5-5. Temperature at Oskarshamn/Äspö. Yearly values for Norra Äspö 2006 - 2008 and for Oskarshamn 1987 - 2005 and yearly mean for Oskarshamn for the period 1961 - 1990.

5.9 Potential evapotranspiration

Values of potential evapotranspiration at the SKB station at Norra Äspö for 2006-2008 and at the SMHI stations in Gladhammar and Ölands Norra Udde for 1987-2005, as well as means for Norra Äspö, Gladhammar and Ölands Norra Udde for the period 1987-2008, are presented in Figures 5-4 and 5-5. See also section 3.8.3.

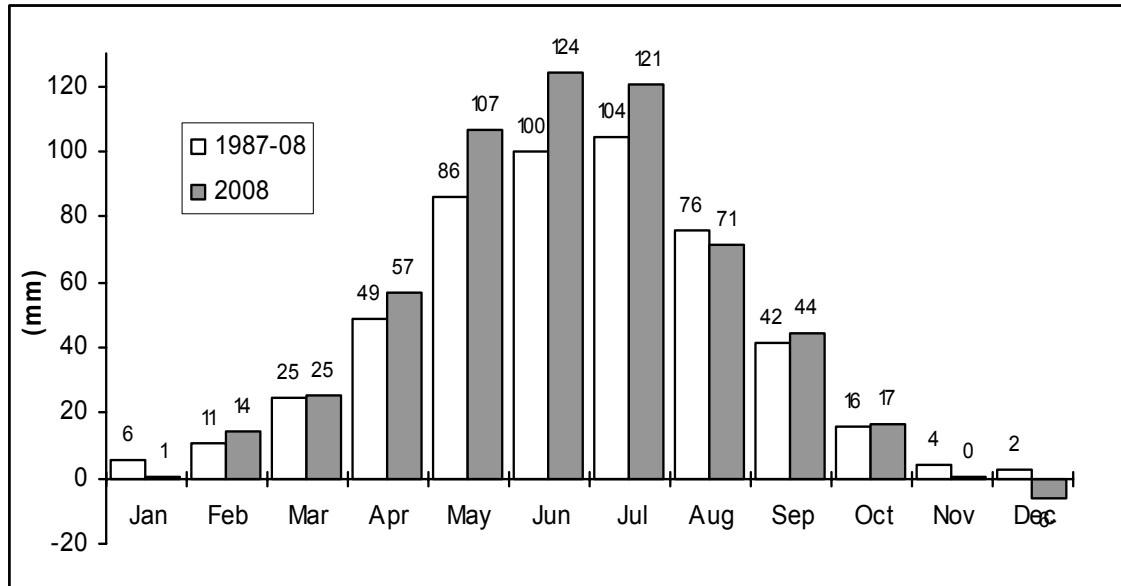


Figure 5-6. Potential evapotranspiration. Monthly values for Norra Äspö 2008 and monthly means from Norra Äspö, Gladhammar and Ölands Norra Udde 1987 – 2008.

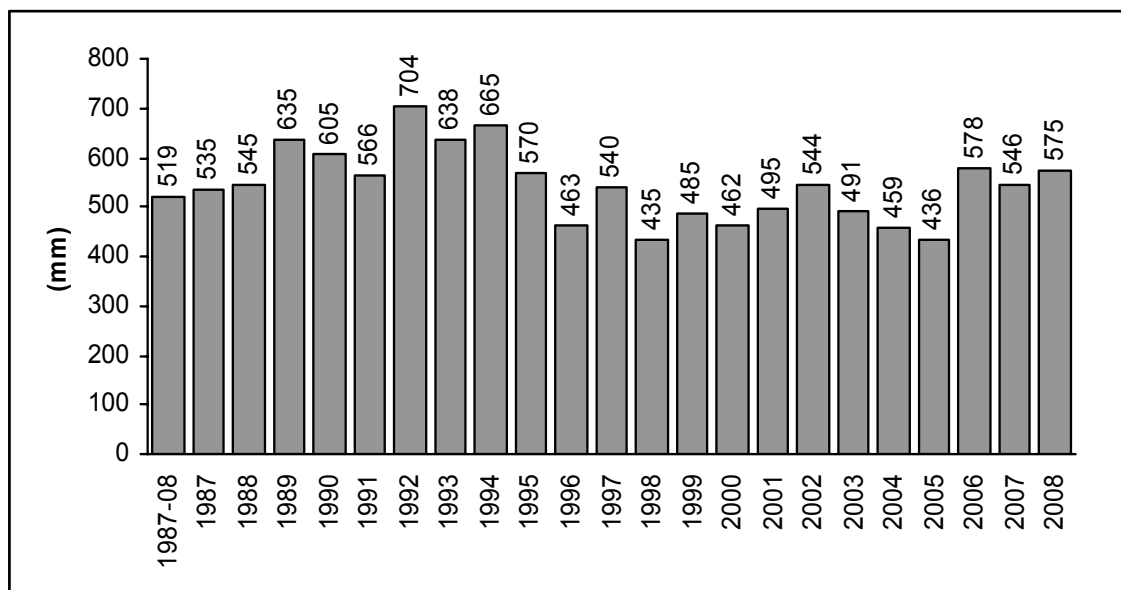


Figure 5-7. Potential evapotranspiration. Yearly values for Norra Äspö 2006 - 2008, for Gladhammar and Ölands Norra Udde 1987 - 2005 and yearly mean for the period 1987 - 2008.

6 References

- Nyberg, G., Jönsson, S., Ekman, L., 1991. Äspö Hard Rock Laboratory. Groundwater level program. Report for the Period 1987-1989. SKB Progress Report PR 25-90-18.
- Nyberg, G., Jönsson, S., Ekman, L., 1992a. Äspö Hard Rock Laboratory. Groundwater level program. Report for 1990. SKB Progress Report PR 25-91-19.
- Nyberg, G., Jönsson, S., Ekman, L., 1992b. Äspö Hard Rock Laboratory. Groundwater level program. Report for 1991. SKB Progress Report PR 25-92-16.
- Nyberg, G., Jönsson, S., Ekman, L., 1993. Äspö Hard Rock Laboratory. Groundwater level program. Report for 1992. SKB Progress Report PR 25-93-09.
- Nyberg, G., Jönsson, S., Ekman, L., 1994. Äspö Hard Rock Laboratory. Groundwater level program. Report for 1993. SKB Progress Report PR 25-94-23.
- Nyberg, G., Jönsson, S., Ekman, L., 1995. Äspö Hard Rock Laboratory. Groundwater level program. Report for 1994. SKB Progress Report PR 25-95-08.
- Nyberg, G., Jönsson, S., Ekman, L., 1996. Äspö Hard Rock Laboratory. Hydro monitoring system. Report for 1995. SKB Progress Report PR HRL-96-17.
- Nyberg, G., Jönsson, S., Ekman, L., 1997. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 1996. SKB Progress Report PR HRL-97-17.
- Nyberg, G., Jönsson, S., Ekman, L., 1998. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 1997. SKB Progress Report PR HRL-98-19.
- Nyberg, G., Jönsson, S., Onkenhout, J., 1999. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 1998. SKB International Progress Report IPR-99-20.
- Nyberg, G. and Jönsson, S., 2000. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 1999. SKB International Progress Report IPR-00-17.
- Nyberg, G., Jönsson, S., Wass, E., 2001. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 2000. SKB International Progress Report IPR-01-29.
- Nyberg, G., Jönsson, S., Wass, E., 2002. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 2001. SKB International Progress Report IPR-02-56.
- Nyberg, G., Jönsson, S., Wass, E., 2003. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 2002. SKB International Progress Report IPR-03-33.
- Nyberg, G., Jönsson, S., Wass, E., 2004. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 2003. SKB International Progress Report IPR-04-46.
- Nyberg, G., Jönsson, S., Wass, E., 2005. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 2004. SKB International Progress Report IPR-05-26.
- Nyberg, G., Jönsson, S., Wass, E., 2006. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 2005. SKB International Progress Report IPR-06-14.
- Nyberg, G., Jönsson, S., Wass, E., 2007. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 2006. SKB International Progress Report IPR-07-10.
- Nyberg, G., Wass, E., 2008. Äspö Hard Rock Laboratory. Hydro monitoring program. Report for 2007. SKB International Progress Report IPR-08-19.

